

Vol. 16, No. 5

May 1997

U.S. \$3.95  
Can. \$6.25



Your Personal  
Communications Source


Printed in the United States

# Monitoring Times®



## Shaking the Foundations of the BBC

\*\*\*\*\*3-DIGIT 535



S176/497

Antenna Projects  
More Racing Freqs  
Shortwave Guide  
Global Music Broadcasts  
Radio Reviews



# the **Best** for **Test**

**\$319.** Save \$30

Take advantage of OPTOELECTRONICS' frequency counter SALEBRATION!!!



U.S. Patent No. 5,471,402

Whether you are testing, calibrating, or aligning you need a good quality frequency counter. Optoelectronics the leader in frequency counters continues in its tradition of engineering the **highest quality test equipment**. Whatever your application may be, **OPTOELECTRONICS has a counter for you**. If you want the **BEST IN TEST**, look no further than **OPTOELECTRONICS**.

## 3000A+ MULTI - FUNCTION COUNTER

- 10Hz-3GHz frequency range
- 10 digit LCD display w/ bargraph and EL backlight
- Measures Period, Ratio, and Time Interval
- Built-in RS232 interface
- Patented Digital Filter and Auto Capture
- Fast 250 million counts per second
- +/- 1ppm accuracy w/ .2ppm option
- Dual high impedance amplifiers for ratio and time interval counting
- 5-6 hour battery life
- Built-in NiCads w/ charger
- Dual 50 Ohm and 1 Meg Ohm inputs



**\$119.** Save \$30

## CUB MINI COUNTER

- 1MHz-2.8GHz frequency range
- 9 digit LCD display
- 8 selectable gate times
- High speed .0001 second gate
- Patented Digital Filter eliminates false counts
- Patented Auto Capture locks frequency display until cleared
- Direct and Pre-scaled ranges
- 50 Ohm input impedance
- 1ppm timebase
- 10 hour discharge time
- Built-in NiCads and charger included



**\$219.** Save \$30

## M1 MICRO COUNTER

- 10Hz-2.8GHz frequency range
- 10 digit LCD display w/ bargraph and backlight
- Patented Digital Auto Filter and Auto Capture
- Digital Communications port for datalogging using optional OptoLink and OptoLog software
- High speed 250MHz direct count with 1Hz per second resolution
- 1ppm timebase
- 1 meg Ohm and 50 Ohm inputs (switchable)
- NiCad batteries and charger included



**\$899.** Save \$100

- 10Hz-3GHz frequency range
- 10 digit LCD display w/ bargraph and EL backlight
- Measures Period, Ratio, and Time Interval
- Built-in RS232 interface
- Patented Digital Filter and Auto Capture
- Fast 250 million counts per second
- +/- .05ppm ovenized timebase
- Internal clock output/External clock input
- Built-in low pass filter
- Built-in rapid-charge NiCads

**FACTORY DIRECT ORDER LINE: 800-327-5912**

# OPTOELECTRONICS®

5821 NE 14th Avenue • Ft. Lauderdale, FL • 33334

Visa, Mastercard, C.O.D. • Prices and Specifications are subject to change without notice or obligation

Telephone (954) 771-2050 Fax (954) 771-2052

MADE IN AMERICA

www.  
optoelectronics.  
com





Cover Story

## Shaking the Foundations of the BBC

By Jeff Chanowitz

To listeners overseas, the BBC World Service is founded on its highly regarded news reporting, backed by its large network of correspondents and seasoned reporters. Consequently, when a cost-cutting measure proposed to bring the World Service under the domestic service, an uproar erupted from all fronts.

In an interview with *MT*, BBC's Graham Mytton expresses optimism about the now modified plan for restructuring. The changes currently underway should prevent duplication of services, while retaining the strengths of each. The BBC is also reaching out to new audiences (particularly women), while retaining its high quality news coverage in conflict areas around the world. See page 8 for the story.

## C O N T E N T S



## Global Rhapsody ..... 14


By John Figliozzi

The scope of music available on shortwave is vastly superior to that offered by domestic broadcasting. The editor of *The Worldwide Shortwave Listening Guide* offers *MT* readers a compendium of music programs that will broaden your musical horizons.

## The Multi-band, Multi-resonant Antenna ..... 18

By Peter Barker

Unlike other multiple frequency resonant antennas, this design does not require the tedious construction of coils and capacitors, but simply calls for measuring out lengths of wire of almost any gauge and making a few solder connections. Squeeze the best out of low propagation conditions whether you are receiving or transmitting.



## Monitoring Montauk ..... 22

By Ed Hesse



An enjoyable vacation spot year-round, Montauk is located on the tip of Long Island — next stop is Europe! Montauk is a great place for the all-band monitor, from long-wave to VHF. Bring the family, too; they'll enjoy the historic lighthouse, the beaches, and the shopping.

## Racing Freqs: Cool Running ..... 26

By Mike Bryson

It's Cool Running at Charlotte as our Racing Freq takes us to North Carolina's Charlotte Motor Speedway for the Coca-Cola 600 on May 25th. Cool races for the budget-minded are also found at the Busch Grand Nationals. Preprogram your radio with these Charlotte area frequencies.



## Reviews:



Among the many kits put together by Ramsey Electronics is an active loop antenna called the Signal Magnet SM100. Our reviewer this month put the project together and found it an excellent shortwave performer and an exceptional value (see p. 88).

Occasionally, Magne finds a Chinese portable receiver that performs surprisingly well for an amazingly low price (how's \$40 sound?). The trick is to find it and know what brand name to look for. Take a peek at our picture of the International MT-718 — if you can find a receiver that looks like that, it may be one and the same. Buy it: it could make a great gift or travel receiver. (See p. 92.)

Parnass picks up some loose ends in the Scanner Equipment column this month (p. 94), with additional notes on the Icom R8500, Uniden BC200XLT, BCT-7, BC9000XLT, BC3000XLT, Radio Shack PRO-2005, PRO-2036!

## DEPARTMENTS

Letters .....	4	Plane Talk .....	76
Communications .....	6	Book Reports and More .....	
PCS Front Line .....	28	Federal File .....	78
Local Service Scramble .....		US Geological Survey .....	
Scanning Report .....	30	Satellite TV .....	80
Things We Wish For .....		DISH Weds Murdoch, etc. ....	
Utility World .....	34	Experimenters Workshop .....	82
Who's Where in the SW Spectrum .....		Radio to Computer Data Interface .....	
Global Forum .....	38	Computers & Radio .....	84
France Quits SW to U.S. ....		Computer Updates, Internet Websites .....	
QSL Report .....	42	Radio Reflections .....	86
English Lang SW Guide .....	43	The Return of the Crystal Set .....	
Propagation Conditions .....	63	MT Review .....	88
The Flux and the SSN .....		Ramsey Signal Magnet Antenna .....	
Beginner's Corner .....	64	What's New .....	89
Mediumwave Moxie .....		Magne Tests .....	92
Below 500 kHz .....	66	International M718 Portable .....	
Beacon Basics .....		Scanning Equipment .....	94
American Bandscan .....	68	R8500 Update .....	
Mixed Bag .....		Antenna Topics .....	96
Outer Limits .....	70	The Tao of Antennas .....	
Micro Pirate Conference .....		Special Events/Club Circuit .....	98
On the Ham Bands .....	72	Ask Bob .....	100
New License Structure .....		R8500, R7100, AR5000 Comparison .....	
DeMaw's Workbench .....	74	Stock Exchange .....	102
Active SWL Antenna .....		Closing Comments .....	104
		Techno-Terms for the Times .....	



MONITORING TIMES (ISSN: 0889-5341) is published monthly by Grove Enterprises, Inc., Brasstown, North Carolina, USA. Copyright © 1997. Periodicals postage paid at Brasstown, NC, and additional mailing offices. Short excerpts may be reprinted with appropriate credit. Complete articles may not be reproduced without permission.

Address: P.O. Box 98, 7540 Highway 64 West,  
Brasstown, NC 28902-0098  
Telephone: (704) 837-9200  
Fax: (704) 837-2216 (24 hours)  
Internet Address: [www.grove.net](http://www.grove.net) (web) or [mt@grove.net](mailto:mt@grove.net) (e-mail)  
Editorial e-mail: [mtditor@grove.net](mailto:mtditor@grove.net)

Subscription Rates: \$23.95 in US; \$36.50 Canada; and \$55.45 foreign elsewhere, US funds. Label indicates last issue of subscription. See page 103 for subscription information.

Postmaster:  
Send address changes to *Monitoring Times*,  
P.O. Box 98, Brasstown, NC 28902-0098.

Disclaimer:  
While *Monitoring Times* makes an effort to ensure the information it publishes is accurate, it cannot be held liable for the contents. The reader assumes any risk for performing modification or construction projects published in *Monitoring Times*. Opinion or conclusions expressed are not necessarily the view of *Monitoring Times* or Grove Enterprises. Unsolicited manuscripts are accepted. SASE if material is to be returned.

### Owners

Bob and Judy Grove

### Publisher

Bob Grove, WA4PYQ

### Editor

Rachel Baughn, KE4OPD

### Assistant Editor

Larry Van Horn, N5FPW

### Art Director

John Bailey

### Design Assistant

Belinda McDonald

### Advertising Svcs.

Beth Leinbach  
(704) 389-4007

### Business Manager

Kelly Davis, KE4TAM

### Editorial Staff

Frequency Manager ... Gayle Van Horn  
Frequency Monitors ... David Datko, Loyd Van Horn  
Program Manager ... Jim Frimmel  
Beginner's Corner ... T.J. Arey, WB2GHA  
K.I.S. Radio ... Richard Arland, K7SZ  
Plane Talk ... Jean Baker, KIN9DD  
Scanning Report ... Richard Barnett  
Computers and Radio ... John Catalano  
Below 500 kHz ... Kevin Carey, WB2QMY  
Experimenter's Wkshp ... Bill Cheek  
Propagation ... Jacques d'Avignon  
DeMaw's Workbench ... Doug DeMaw, W1FB  
Digital Digest ... Bob Evans  
Federal File ... John Fulford, WA4VPY  
SW Broadcasting ... Glenn Hauser  
On the Ham Bands ... Ike Kerschner, N3IK  
Magne Tests ... Lawrence Magne

Communications ... Larry Miller  
What's New? ... Larry Miller  
Scanning Equipment ... Bob Parnass, AJ9S  
Satellite TV ... Ken Reitz, KS4ZR  
Antenna Topics ... W. Clem Small, KR6A  
American Bandscan ... Doug Smith, W9WI  
SW Broadcast Logs ... Gayle Van Horn  
QSL Corner ... Gayle Van Horn  
Utility World ... Larry Van Horn, N5FPW  
PCS Front Line ... Dan Veeneman  
Outer Limits ... George Zeller

Correspondence to columnists should be mailed c/o *Monitoring Times* via e-mail ([mt@grove.net](mailto:mt@grove.net)) or via post office. Any request for a personal reply should be accompanied by an SASE.




# GET 5 BOOKS FOR ONLY \$4.95

WHEN  
YOU  
JOIN  
THE **Electronics  
Book Club®**

VALUES TO \$155.75


The leading source of information for electronics hobbyists for over 30 years!



5869500 \$19.95



0235619-XX \$50.00  
Hardcover/Counts as 2



0582157 \$26.95




0304068 \$17.95




0052387 \$28.95  
Hardcover



0156417 \$21.95




0673764-XX \$54.95  
Hardcover/Counts as 2




0487375 \$24.95




0449902 \$19.95  
Hardcover

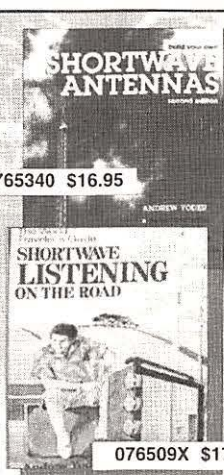

0765340 \$16.95

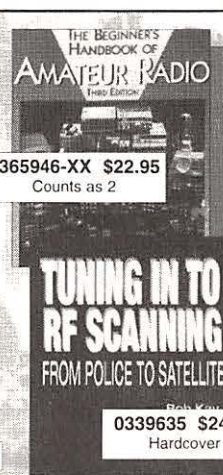

0365946-XX \$22.95  
Counts as 2



0304084-XX \$24.95  
Counts as 2



0047014 \$19.95  
Hardcover




076509X \$17.95




0339635 \$24.95  
Hardcover



1574875 \$19.95



032381X-XXX \$119.50  
Hardcover/Counts as 3




0765359 \$34.95  
Hardcover




0707618 \$19.95



0242046 \$39.95



882138X-XX \$32.95  
Counts as 2



070824X \$24.95

If coupon is missing, write to: Electronics Book Club, A Division of The McGraw-Hill Companies, P.O. Box 549, Blacklick, OH 43004-9918

## As a member of the ELECTRONICS BOOK CLUB...

you'll enjoy receiving Club bulletins every 3-4 weeks containing exciting offers on the latest books in the field at savings of up to 50% off the regular publishers' prices. If you want the Main selection, do nothing and it will be shipped automatically. If you want another book, or no book at all, simply return the reply form to us by the date specified. You'll have at least 10 days to decide. If you ever receive a book you don't want due to late delivery of the bulletin, you can return it at our expense. Your only obligation is to purchase 3 more books during the next 12 months, after which you may cancel your membership at any time. And you'll be eligible for FREE BOOKS through our Bonus Book Program.

PHONE: 1-614-759-3666  
(8:30 a.m. to 5:00 p.m. EST Monday-Friday)

FAX: 1-614-759-3749  
(24 hours a day, 7 days a week)

## Electronics Book Club®

A Division of The McGraw-Hill Companies, P.O. Box 549, Blacklick, OH 43004-9918

**LIVES!** Please send me the books listed below, billing me just \$4.95, plus shipping/handling & tax. Enroll me as a member of the **Electronics Book Club** according to the terms outlined in this ad. If not satisfied, I may return the books without obligation and have my membership cancelled.

--	--	--	--	--

If you select a book that counts as 2 choices, write the book number in one box and XX in the next.

If you select a book that counts as 3 choices, write the book number in one box and XXX in the next two boxes.

Name \_\_\_\_\_  
Address/Apt. # \_\_\_\_\_  
City/State \_\_\_\_\_  
Zip \_\_\_\_\_ Phone \_\_\_\_\_

Valid for new members only, subject to acceptance by EBC. Canada must remit in U.S. funds drawn on U.S. banks. Applicants outside the U.S. and Canada will receive special ordering instructions. A shipping/handling charge & sales tax will be added to all orders.

MT597

A shipping/handling charge and sales tax will be added to all orders. All books are softcover unless otherwise noted. (Publishers' Prices Shown) © 1997 EBC



# The Grove/RCMA Agreement

**RCMA**

Dear RCMA member:

I am pleased to announce that an agreement has been reached between the RCMA Board of Directors and Grove Enterprises. This agreement protects RCMA members who had outstanding issues due on their membership. An issue of *Monitoring Times* will be sent to each RCMA member for each issue due of the *RCMA Journal*.

An earlier effort undertaken with another publisher to fulfill the balance of issues due did not materialize. Grove Enterprises has agreed to make every possible effort to honor the remaining issues due for each RCMA member. Considerable effort, thought, and concern has gone into this agreement.

RCMA members who have changed their mailing address are asked to send the new address along with your RCMA membership number to...

RCMA Mailing List, c/o Grove Enterprises, Inc.  
Post Office Box 98, Brasstown, NC 28902

Grove Enterprises can also be reached by email at: [mt@grove.net](mailto:mt@grove.net)  
I would like to thank Bob Grove and his staff for the warm and professional assistance they have given the RCMA Board of Directors and former staff during this most difficult time. Those former RCMA members who will be receiving *Monitoring Times* will find the publication most enjoyable and helpful in the pursuit of the hobby.

With kind regards to all,

Bill Mauldin  
(former RCMA General Editor)  
[bmauldin@compuserve.com](mailto:bmauldin@compuserve.com)

**GROVE**

Dear Fellow Listener:

As a long-time (and long ago) editor of the *RCMA Journal*, I am pleased to share some good news with you. *Monitoring Times*, the leading listener's publication, has agreed to honor the unfilled subscriptions of RCMA. Beginning with the May issue, you will receive *MT* at no cost for the balance of the RCMA months due. Present *MT* subscribers will enjoy a free extension of that subscription for the same balance.

I am especially pleased that the Board of Directors of RCMA has accepted our offer to help them satisfactorily resolve a very difficult situation. We will work very hard to ensure that their trust has been well placed.

The professional staff of *Monitoring Times* welcomes you to our family, and we look forward to hearing from you. While we always enjoy compliments, we are also responsive to criticisms; let us know how we can improve our magazine to meet your listening needs.

With warm personal regards,

Bob Grove  
Publisher

## A Warm Welcome to RCMA

As editor, I would like to take this opportunity to welcome RCMA members to the ranks of *Monitoring Times* subscribers. Many of you are already friends and/or subscribers, and you know *MT* covers radio, dc to daylight. It's a different focus from the dedicated scanner coverage at which the *RCMA Journal* excelled, but we welcome your input and information and will put it to good use for all to enjoy.

This agreement with the RCMA Board of Directors is a nostalgic one for Bob Grove, whose early contributions to the monitoring hobby were as an editor for the club's newsletter. In exchange for honoring the RCMA unfilled subscriptions, Grove Enterprises receives the final RCMA membership/mailling list and all rights to the RCMA logo. Grove is not responsible for any outstanding debts of RCMA.

At this time, *Monitoring Times* has no

plans to make use of the respected RCMA logo. According to Bob Grove, "Should there ever be a revival of the RCMA club, we will be happy to return the logo to its official board, but we have no intent to use or to sell the logo to any other body."

Bill Mauldin forwarded one response from RCMA member, Ray Hill, who said, "Somehow, it does not surprise me that Bob Grove would help out. Things like this make me glad I am a subscriber to *Monitoring Times*. For those former RCMA subscribers, who do not yet have a subscription to *MT*, they will be pleasantly surprised."

Thanks, Ray; we do our best!

## Gilfer Gone?

Another pioneering radio entity in which Bob Grove played a part is Gilfer Enterprises, which seems to have fallen on hard times. Although no official statement has been made, Gilfer's phone is no longer being answered

and its Web page has been removed. Bob Grove, Larry Miller, Larry Van Horn, Gerry Dexter—all long-time DXers—are unanimous in their reactions to its apparent demise: "It's the end of an era."

Gilfer, owned by Jean and Perry Ferrell, published the *Confidential Frequency List*. Bob edited at least two editions of the book before he began his own company. More recently, the business has been run by Paul Lannuier (following Perry Ferrell's death in an auto accident), while Jean Ferrell retained rights to the book.


With special issues that needed to be addressed over the past two issues, we've not had room to run your letters. I want you to know that they are read and are much appreciated. We'll get back to sharing some of them in the coming months. Meanwhile, let us know what you're thinking by writing to "Letters," PO Box 98, Brasstown, NC 28902, or e-mail to [mteditor@grove.net](mailto:mteditor@grove.net).

—Rachel Baughn, Editor



# You may not know our name . . .

## but our history gives us away!

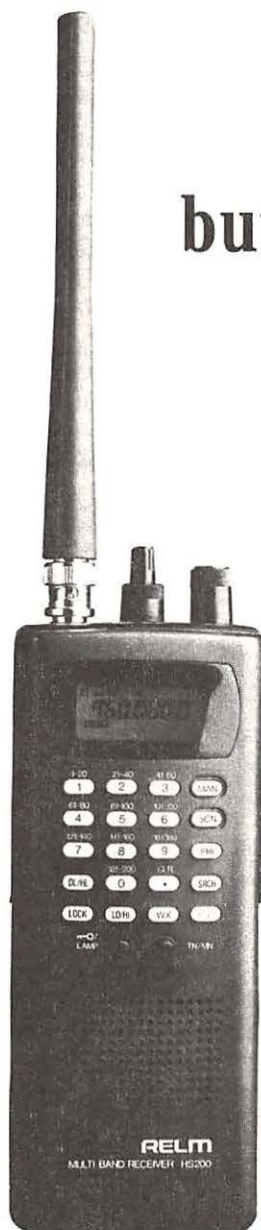

While the name RELM Communications (formerly Regency Electronics) may not make you think of scanners, it soon will. We're re-entering the scanner market with top-quality, professional scanners. With that goal in mind, we're excited to introduce the HS 200 portable scanner. The HS 200 covers 13 bands including aircraft and 800 MHz. Other features include:

- 200 Channels, 10 Banks
- **PL/CTCSS**
- Fast Scan
- Bank Scan
- Priority Scan with Hierarchy
- Direct Channel Access
- Search Hold
- Birdie Lockout
- 10 Priority Channels
- **DPL/DCS**
- Scan Delay
- Weather Scan
- Priority
- Search
- Channel Lockout
- LCD Display

**Call for more information  
on our complete line!  
800-821-2900**



*Pictured Right:  
The HX 1000 was a popular scanner  
under the Regency Electronics name.*

**RELM**  
TM  
COMMUNICATIONS

7505 Technology Drive  
West Melbourne, FL 32904  
407-984-1414  
Fax: 407-984-0434



## Amateur Obsession

There are thousands of ham radio operators in the United States. Their level of enthusiasm for the hobby varies. Some get their license but never go on the air; others begin a single-minded pursuit of all things amateur, including vanity call signs and license plates with their call letters. Few, however, come close to Richard Burton. Burton has even gone to federal prison over ham radio.

According to the *W5YI Report*, the story begins in 1981 when Burton, then licensed as WB6JAC, got in trouble with the federal government by cursing on the air. His license was revoked and he was ordered off the air. That didn't stop the 51 year old who kept on talking and that landed him in federal prison for 6-1/2 months.

When his probation ended in 1989, Burton took a test for a new license. But before the license could be granted, government investigators caught him illegally on the air again. This cost him \$2,000 and another year's probation. In 1993, he was again caught on the air and sentenced to another seven months in jail.

Last fall, after being denied a ham radio license for 15 years, Burton slipped into a testing center and passed the test to get a ham radio license. Before government officials realized who he was, an FCC computer spit out a license, KF6GKS. Red-faced officials quickly revoked the license. But did that stop Burton from going on the air? Rumor has it that Richard Burton, ex-WB6JAC, ex-KF6GKS, is now back on the air again—illegally.

## More Bad Car Phone News

Using a car phone while driving quadruples your chance of getting in an accident. In fact, according to researchers in Canada, talking

*"Honestly, ma'am, I haven't been drinking. I was just using my cell phone in the car!"*



on a car phone behind the wheel is about as risky as driving while close to legally drunk—even if you are using a "hands-free" system. The risk drops to normal as soon as the driver hangs up.

The study was based on 699 Toronto-area drivers who had cell phones who were in-

involved in crashes that resulted in substantial damages but no injuries. The number of cell phones grew 1,685 percent from 1986 to 1995 with 34 million people who now drive and talk.

## Political Grandstanding or Cell Phone Crisis?

Could the recent congressional subcommittee hearings on cell phones and scanners have been nothing more than political grandstanding? It could be, if one newspaper report is to be believed. According to the *Seattle Post-Intelligencer*, cell phone companies are "rushing to introduce digital (un-scannable) service." The primary reason for the "rush" isn't to avoid scanner listeners and it wasn't prompted by the hearings.

U.S. West, for example, had already been testing their digital cellular telephone network for three years before the hearings. And the prompt came from market forces, not politicians and lobbyists, performing before the cameras like trained dogs. Reporter Jim Erickson says that the move to digital was "in advance of a wave of competition from companies that have won licenses to provide wireless communications services [through recent FCC frequency auctions]."

What makes the story odder still is that despite the advantages of digital, customers have not been "rushing" to get digital cell phones. In fact, says Erickson, AT&T Wireless Services introduced the digital phones back in 1993 but "customer acceptance was low."

## More Industry Woes

Grundig makes a decent shortwave radio but it apparently isn't doing all that well in the world of business. Chief executive officer Pieter van de Wal, who took charge of the company last year at the behest of Philips Electronics—which owns 32 percent of the struggling company—is stepping down. Philips has been exercising management control over Grundig for twelve years but announced last month that it, too, is pulling out.

Analysts estimate that Grundig, based in Fuerth, Germany, had a loss of about 300 million marks (\$185.5 million) on sales of three billion marks 1996. This would be Grundig's sixth straight annual loss. Van de Wal had hoped that he could turn the company around by slashing Grundig's work force

by half, from 12,000 a year ago to about 6,000. He also announced the sell-off of Grundig's security systems business and shifted television set production outside of Germany.

Like other makers of consumer electronics in Europe, Grundig has been clobbered by brutal price wars, declining demand, and stiff competition from Asian producers. "It seems," says Anita Farreol, a technology-industry analyst at Merrill Lynch, "there's a little bit of panic at Grundig."

## Alleged Phone Eavesdropping



*"And I suppose our neighbors can PROVE that we're trying to eavesdrop on them?"*

A Kirtland, Washington, police dispatcher and her mother are being sued for \$10,000 after being accused of using a scanner to listen in on their neighbors' cordless telephone calls. Callie, Gregory, and Linda Burkhardt claim that the Denise and Linda Starrs secretly listened to their phone calls and used the information "for personal gain." The papers were filed in U.S. District Court.

The lawyer for the plaintiffs said that he could not disclose details of the suit but that "if you listen in on a phone call and disclose the information, it's a felony." He added that the Starrs had a large antenna on their house "to get more power to their scanner." Several other people, including "John/Jane Doe and John/Jane Roe" are also listed as plaintiffs "in case there are others who were either victimized or listening in."

## Phone Foils Robbers

Four teenagers are under arrest after a Lake County, Ohio, sheriff overheard a friend of the suspect boast that his friends had



committed a robbery. The conversation "fit like a piece in a puzzle."

Police said that one teen robbed the cashier while another waited inside the store. Two others were in a stolen getaway car. The plan was foiled when the vehicle got stuck in a drainage ditch and bailed out to avoid Ohio Highway Patrol troopers.

"I think they fancy themselves as modern-day desperados," said Detective Lt. Lonnie Sparkman. "They're just goofs." The robbery netted the four \$360.

## Tower Tales

You may remember the date: August 18, 1991—in fact you may have heard the noise. On that summer day, the world's tallest structure—a 2,120 foot radio tower in Poland—came crashing down. The antenna belonged to Radio One, a longwave station. Today, Radio One's tower has still not been rebuilt, despite a large and loyal audience that once ranged from London to Libya.

The project has been blocked by one woman, Teresa Skorzynska. Skorzynska's husband died of cancer, an illness she attributes to radio waves from the tower. And in the intervening six years, she has waged a one-woman war against its rebuilding.

"We have exact data," says Mrs. Skorzynska. "People who worked near the antenna have gone mad. Guards have died of bone cancer. Babies were born with birth defects. Children fainted at school. They keep telling us that radio wave don't hurt us. We know they do."

Krzysztof Michalski, Chairman of Polish Radio, calls the furor "Chernobyl syndrome." Health in the antenna zone is poor, he says. Fuming trucks roar past; a chemical plant seethes nearby. "They drink their own sewage," says Michalski undiplomatically.

Last September, a Warsaw judge finally rejected Mrs. Skorzynska's case against the antenna. Polish Radio's win was short-lived. Within two months, another Polish judge noted that Radio One's building permit was filed under an old building. The whole thing was thrown out and must now start over again. It will take years.

## Digital Michigan

State Police in Michigan have announced that they are "leapfrogging toward the future" with the unveiling of a \$187-million 800 MHz digital radio system. The system is up and running in parts of Gaiot, Clinton, Shiawassee, Eaton, Ingham, Jackson, and Hillsdale counties.

So far, 22 towers have been constructed: when the system is fully operational statewide in 1999, there will be 181 towers. The system will also be available to county and local departments as well. Even conservation officers, park rangers and highway workers will be unscannable.

## Salt Lake Scanning

Salt Lake patrol officers won't be asking the dispatcher for stolen car checks or getting outstanding warrants—at least you won't hear them on your scanner. Portable laptop computers are now being installed in 75 police cars. Says Tom Zoellner of the *Salt Lake Tribune*, "the blips on the screen are supposed to replace the babble on the radio." Salt Lake police hope to have all non-emergency traffic going through computers by the fall of this year.

## WGY Birthday Ad Stirs Racial Flames

African-American leaders are in an uproar over a newspaper ad run by radio station WGY in Schenectady, New York. The ad, which touts the station's 75th anniversary, depicts an aboriginal warrior, spear in hand and dancing. The accompanying caption says that staying young in radio requires "an almost primal disregard for dignity or civilization."

"The ad was despicable, and the wording was insensitive and offensive to a person of color," says Anne Pope, president of the Albany branch of the NAACP. Other black leaders went further, saying that the ad was "a deliberate attempt to stir racial tensions."

They demanded an apology from WGY and the firing of talk show host Mark Will-

## "101 WAYS HOW NOT TO CONDUCT AN ADVERTISING CAMPAIGN"



iams, who they believe is "part of the racist nature of some of WGY's programming." Williams responded on the air, saying that the black leaders were racists and were "twisting [the ad around] to fulfill their own racist agenda." WGY apologized, saying that "we never intended to offend anyone."

"Communications" is edited by Larry Miller. We also thank the following members of the Communications Monitoring Team who look for, clip and send in copies of radio-related stories from their local newspapers: Anonymous; Chet Copeland, Washington, DC; Kenneth Dowst, Hartford, CT; Leslie Edwards, Doylestown, PA; Peter Greene, Eastlake, OH; Richard Johnson, White Deer, PA; Maryanne Kehoe, Atlanta, GA; Robert Kissel, Swartz Creek, MI; Hue Miller, Ira Paul, Royal Oak, MI; Brian Oakley, Ft. Worth, TX; Edward Schwartz, Chicago, IL; Richard Sklar, Seattle, WA and Dennis Taschner, Trenton, NJ. We also consulted the following publications: *National Scanning*, *Wall Street Journal* and *W5YI Report*.

**Rave Review**  
Pop Comm  
April '96

www.vikingint.com

# Professional 10 HOUR RECORDER

"BUILT LIKE A BATTLESHIP"

**SPECIAL Monitoring Times Price..**

# \$159

Includes UPS to 48 States

- Heavy duty commercial recorder - NOT improvised from consumer models
- 12, 14, and 16 hour models also available
- BUILT-IN voice activation (add \$30)
- Applications information included
- Dimensions: 11.5 x 7.0 x 2.75"

COD's OK Callit residents add tax. Sorry, no credit cards. Free catalog USA only, other countries \$5

**Viking International** 150 Executive Park Blvd. #4600 San Francisco, CA 94134

Factory Direct **Phone: (415) 468-2066 • Fax: (415) 468-2067 "Since 1971"**



*How firm a foundation?  
Headquartered in the Bush  
House in London, the BBC is  
facing major changes to its  
worldwide operations.*

*(photo digitally altered)*

# Shaking the Foundations

of the **BBC**


By Jeff Chanowitz

**A**s regularly as the traditional hourly chimes of Big Ben and the announcer proclaiming "This is London," generations of listeners have relied on the BBC World Service for high-quality news and programming and comprehensive coverage of breaking news events around the globe. However, the development of new broadcasting technologies, tighter budgets, and a new geopolitical landscape has caused the BBC to implement dramatic changes to its World Service operations, signalling a new direction for one of the most respected voices in international broadcasting.

From his office at the World Service's headquarters located at Bush House in London, Graham Mytton, Controller, Marketing, World Service, talked to *Monitoring Times* about the BBC's restructuring and other new initiatives the World Service is implementing as it heads into the 21st century.



*Graham Mytton*

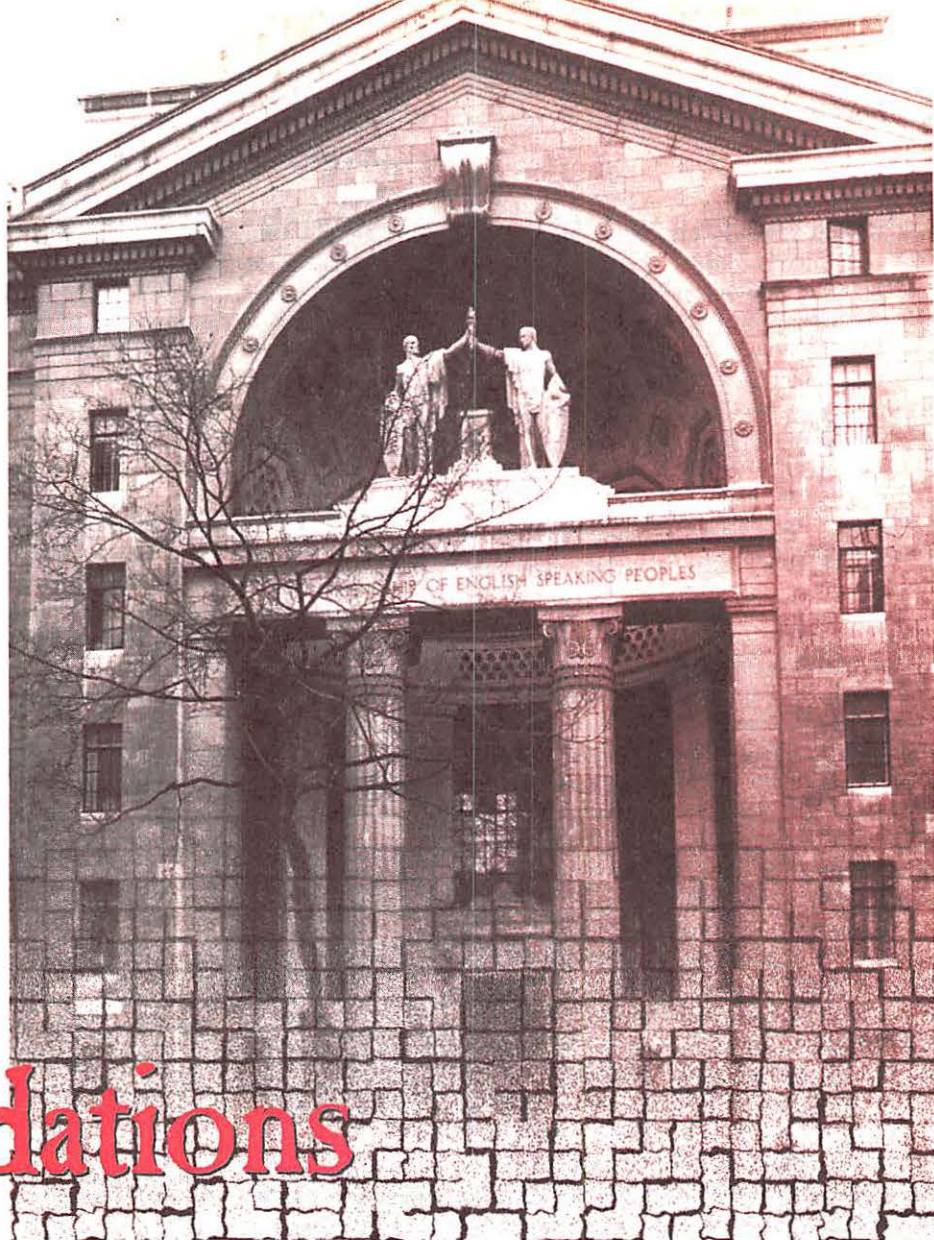



## ■ Restructuring

For the most part, restructuring of the World Service operations has come about as a result of the financial constraints that are currently afflicting the BBC. Tony Hall, the Chief Executive for the BBC, put it candidly, "The broadcasting world is changing dramatically. Costs are rising, funding is flat or being reduced. We need to make sure that now and in the future we can afford those things that make the BBC's journalism as a whole unique."

With a 12 million pound budget deficit this year at the World Service and a need to make investments in digital technology, top management at the BBC proposed a merger of the BBC's World Service and its domestic service in a move to economize.

Described as a "world disservice" and criticized throughout the British press, the proposed changes to the World Service caused an uproar over fears that the golden reputation the international service has built up over the last 60 years would be tarnished by the lower standards of its domestic operations. In response to the criticism, a "working group," which was composed of members of the BBC and the British Foreign Office, was established to study the possible effects a consolidation would have on the BBC's World Service news operations.

After several months of studying the matter, on October 12, 1996, the "working group" proposed 20 new measures designed to safeguard the quality of the World Service's news operations. Instead of merging with the BBC's domestic news service, the World Service's news and live programming will be produced by a "dedicated unit," that will operate within the BBC's news gathering operations. Also, using a trend in broadcasting called "Bi-media," the "dedicated unit" will provide news coverage for both the BBC World Service radio and the BBC's commercial international television service. While the English Service will feel the brunt of the consolidation measures, the overall impact of the consolidation will result in a reduction of 90 members at the World Service, reduce the output of the World Service's Czech broadcasts to



*The BBC World Service Newsroom is receiving many accolades as it fights to remain independent and intact.*

Europe, and eliminate 30 minutes of Portuguese and French programming for Sub-Saharan Africa. Also, the Cantonese service will reduce its transmissions by 30 minutes; however, this will be offset by placing the programming on the BBC's internet site, [www.bbc.co.uk/worldservice](http://www.bbc.co.uk/worldservice).

Sounding optimistic about the new proposal, Mytton indicated that "clear guides and requirements have been put in place so that the World Service's programs will be of high-quality and range and meet the requirements of audiences world wide." He remarked, "There are all sorts of ways in which this will work to the advantage of the listeners." Mytton cited the advantages the World Service will have now that it can use the BBC's domestic service as a resource and added that the old system was inefficient "as both domestic ser-

vice and world service reporters would cover the same story."

However, critics of the restructuring in the British press have pointed out that the BBC's world television operation is run on a shoestring budget and the quality of its news service is commonly thought of as falling far short of the BBC World Service. It is feared that a consolidation of the BBC's international television operations could jeopardize the World Service's quality. The United Kingdom based magazine *The Economist* quoted an unnamed correspondent in a recent story, who worked for the BBC World Service and BBC's World Television Operations, as giving a candid comparison of the two services. He remarked, "The World Service radio has far higher editorial standards and a far better ability to respond intelligently to breaking news than the BBC World Service."

From a listener's prospective, it will be hard to discern any immediate effect of the consolidation in the World Service's broadcasts. While down-sizing is never a happy task, the ultimate success of the changes will be measured by the World Service's ability to continue to provide listeners with the quality of news that has made it a yardstick of excellence for international broadcasting.

## ■ The BBC's Diverse Programming

Despite the restructuring, the BBC remains committed toward producing high-quality programming. Mytton commented, "we are going to put a greater emphasis than



*To listeners overseas, the BBC is built upon the World Service.*




in the past on our news and current affairs programs." Perhaps the best example of this programming is *News Hour*, an award winning program that consists of world news, headlines, in-depth reports, business updates and features. Contrary to its name, *News Hour* consists of three hour-long programs which are aired in separate time zones. Mytton describes the five year old program as a "great success" that has attracted many listeners to the World Service.

In addition to *News Hour*, the BBC offers top notch news coverage that is guaranteed to satisfy the most information hungry listener. These current affairs programs include *Britain Today*, *News Day*, *News Desk*, *The World Today*, and specialized reports targeted at Africa, Asia, Europe, and the Caribbean.

The BBC's English service also continues to provide an impressive variety of programs ranging from *The World Business Report* and *World Business Brief* for financial news to *Development 97*, which provides the latest information about the economic and social situations of countries in the third world to *Global Concerns*, a program that informs listeners about the state of the world's environment.

Music oriented programming also continues to be a strong aspect of the BBC's output. Listeners can hear a diverse mix of programs that provide offerings in Classic, Jazz, Pop,

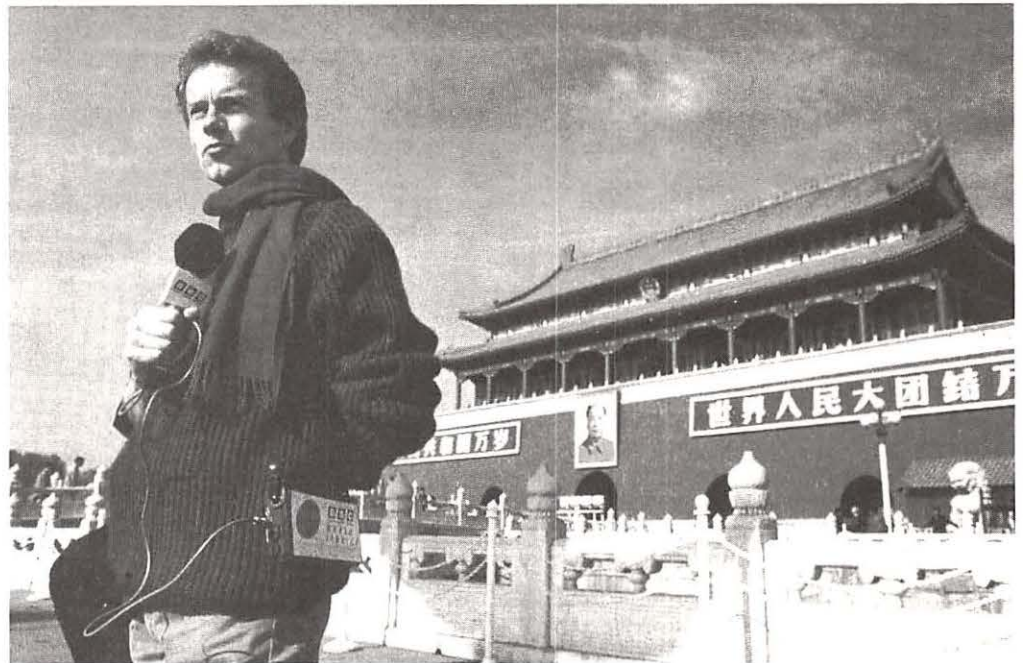

*Adams Brookes in Beijing is representative of the BBC's 250 correspondents worldwide.*

Reggae, and Folk music in its programs *MegaMix*, *Jazz Score*, and *Concert Hall*, *Folk Routes*, *World Ranking*, *Multi-Trak*, and *Country Style*.

While little noticed by its listeners in the developed world, the BBC has also put a new emphasis on providing "education" programming in order to fulfill the informational needs of listeners in their daily lives. Mytton remarked, "The education programs are not of the typical instructional English language variety." Listeners in the developing world can hear programs in languages ranging from Pashto to Arabic to Hindi that provide information about health issues, sex education, and drug addiction—information often unobtainable in their own media.

Another example concerns the unexploded land mines that remain a constant hazard as a result of the many conflicts that continue to affect Cambodia, Vietnam, Angola, and Afghanistan. The mines account for thousands of amputations and deaths yearly. To help prevent this on-going tragedy, the BBC ran two series of programs to help listeners identify and avoid land mines. One series, in Pashto, was directed to refugees returning to Afghanistan a few years ago; the other ran as part of the English stream just last year.

Mytton expressed the BBC's commitment to its educational programs remarking, "These types of programs will be a very important part of the programming the BBC will do in the future."

Perhaps the biggest change in the BBC World Service programming is its new drive

to attract a bigger female audience. Mytton commented, "It's a little known fact that the BBC's audience is overwhelmingly male." He added, "In some countries the BBC's male audience outnumbers its female audience by as much as 19 to one....this is not an inevitable fact and reflects some of the kind of programming we are broadcasting."

At present, the BBC is at work developing new types of programs aimed at tapping into this huge audience. To start this initiative, during 1997 the English service will launch a weekly news magazine, which is solely devoted to providing comprehensive coverage of women's issues.

To obtain detailed information about the World Service's English programming, listeners can refer to this month's *MT's* short-wave guide. A complete listing of the World Service's programming (subscription price is \$30 a year) is available in its magazine *BBC On Air*. The address to write to is: Dept. Sub, Room 207 NW, Bush House, Strand, London WC2B 4PH, United Kingdom.

#### ■ Crisis Broadcasting

The true test of the changes at the BBC World Service will be its continued ability to provide high-quality news coverage of an international crisis, and to make an impact during the event. Mytton commented, "The BBC plays a very important role in conflict areas of the world."

In Somalia, where a civil war has cost over one hundred thousand lives, the BBC has



*Perhaps the biggest change in the BBC World Service programming is its new drive to attract a bigger female audience. Mytton commented, "It's a little known fact that the BBC's audience is overwhelmingly male."*



responded by providing programming that gives listeners vital information, which is heard by at least 41% of the population. The World Service's programming is so popular that a British anthropologist reported that while she was on a bus on route to Mogadishu, the Somali capital, the driver pulled off the road and turned off the engine so that all the passengers could listen to the BBC.

One of the most popular programs on the Somali service is *Missing Persons*, a program that puts listeners in touch with relatives who have gone abroad. On the program, desperate appeals from individuals are aired on a regular basis. Not uncommon are heart-rending pleas such as this one: "Since my mother's house was destroyed, I do not know where she is. Tell my wife I'm alive ... I do not know if my children have been killed." Mytton asserted, "Our programs in Somalia are important to link up families."

The BBC, in conjunction with the United Nations, has also been instrumental in helping reunite families during the civil war and resulting conflicts in the East African countries of Rwanda, Zaire, and Burundi. Mytton commented, "the BBC is now providing special programs in Kinyarwanda and Kirundi languages for Rwanda and Burundi." At present, the limited research that can be conducted in the region indicates that the programs are very popular and have been a humanitarian life line for the families it has helped to reunite.

In the former Yugoslavia, the BBC has also played an instrumental role in helping reunite families in Bosnia. In addition to inaugurating the Macedonia service in 1995, the BBC's Croatian, Serbian, Slovene, and Albanian services have provided vital information to counter the government controlled media of the region. Often, the BBC has been the primary news source for listeners wanting accurate and unbiased news coverage of the Yugoslav civil war during the early 1990s and of the current pro-democracy demonstrations that are rocking Serbia's government today.

At present, the BBC's World Service's network of 250 correspondents, backed up by 50 news bureaus and the information obtained by the BBC Monitoring Service from radio, television, and news agency sources, continues to provide listeners with the latest information during a global crisis. It is little wonder that during the short-lived pro-democracy movement in



*The BBC's network of 250 correspondents, backed up by 50 news bureaus and the information obtained by BBC Monitoring from radio, television, and news agency sources, ... provides listeners with the latest information during a global crisis.*

China in 1989, students thought the World Service's programming to be so important that they publicly demonstrated their appreciation for the BBC by parading a banner in downtown Beijing which said, "Thank You BBC." In December 1993, as if to reinforce the continued impact of the BBC's broadcasts, the government of China stepped up its


efforts to jam its programs in Mandarin.

While jamming was also attempted by the former Soviet Union during the Cold War and in Iraq during the Gulf War, the BBC's programming was clearly being received by listeners, as witnessed by hostages coming out of Lebanon in the 1980s, by Mikhail Gorbachev during the attempted coup in 1991, and by one Russian listener who wrote, "I have listened to the BBC for the last 40 years, and I have been punished for that as have many Soviet citizens during a period of our history....I am writing for the last time to thank you for the moral support all these years."

### ■ Time for a New Focus

It is these external geopolitical and technological factors, in addition to internal restructuring, that have resulted in a number of the changes at World Service.

First of all, with the breakup of the Soviet Union and the development of a bipolar political landscape, the BBC has refocused its broadcasts toward the newly independent countries that have emerged in the Caucasus and Asia regions. Mytton commented, "We are growing in our programming in the former Soviet Central Asia." As Uzbekistan has been flung into a civil war and strife continues between Armenia and Azerbaijan over the disputed enclave of Nagorno-Karabakh, the BBC has added broadcasts in Kazakh and

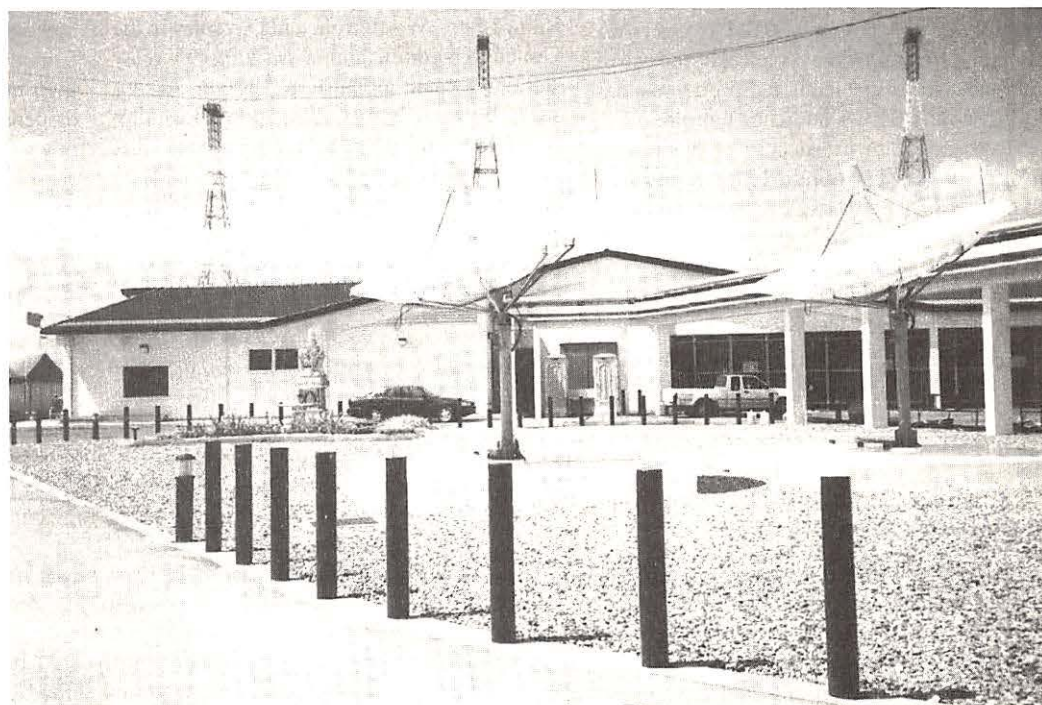

*Although the BBC is deeply interested in alternative methods of delivery, it remains committed to shortwave broadcasting. Shown is the BBC's Asia relay station in Thailand.*



Krgyz to the languages of Azeri, Uzbek, and Russian, which are already broadcast to the region.

While there are no other plans for additional languages, Mytton did indicate that the BBC was currently examining "an expansion of its Arabic transmissions."

### ■ Relaying the BBC's Signal

As part of the BBC's strategy of seeking alternative avenues to relay its signal globally, "We will continue to look for additional placement of the BBC on FM transmitters in various parts of the world," said Mytton. One example of this strategy has been the recent opening of the BBC's FM transmitter in Kampala, Uganda.


BBC program placement has also been quite successful in the United States. Currently, the BBC's news and programming is carried on more than 120 radio stations throughout the country, making it the most listened-to international broadcaster in the United States.

Additionally, the C-Span Audio Networks in the (U.S.) and the World Radio Network (London, U.K.) currently provide listeners with the opportunity to hear the BBC via satellite with a digital quality signal. According to C-Span audience surveys, the sole reason for many in its audience to subscribe to the audio service was to receive the BBC with a high-fidelity signal. This strategy has been equally successful in Europe. In Finland, where the Service only counted 50,000 listeners via short and mediumwave broadcasts, the use of rebroadcasting via local radio stations has increased the BBC's audience tenfold.

In response to its success of placing its programs on FM stations, Mytton announced that the BBC would "explore the possibilities of launching a second English service which would be available via satellite to rebroadcasters around the world." In addition, the World Service is also seeking to fund research to develop a digital audio broadcasting service that will enable international listeners to hear the BBC with a CD-quality reception on a new generation of radio receivers.

### ■ Shortwave Broadcast Plans

By no means does this mean that the World Service is abandoning its commitment to shortwave. Mytton commented, "People say that shortwave is dead or dying ... this is rubbish because the overwhelming majority of our listeners continue to listen to the BBC via shortwave."

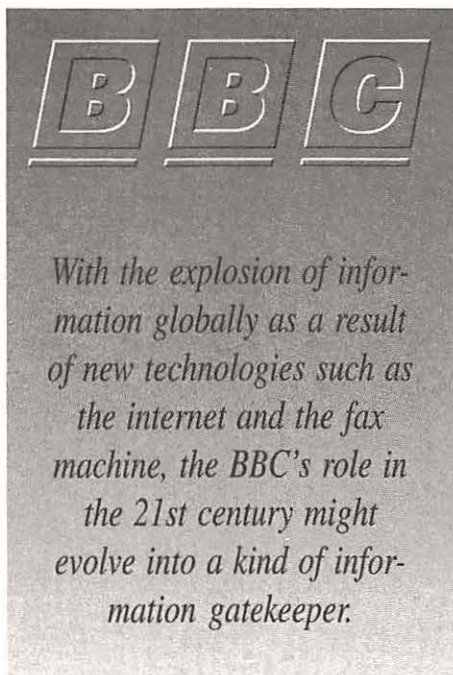

As if to reinforce this message, Mytton announced that one of the top priorities of the World Service is to replace its shortwave transmitter in Misira Island, Oman. He asserted that, "more listeners receive the BBC via Misira than any other transmitter, including the BBC's transmitters located in the United Kingdom!"

With the addition of its new 250 kW relay station in Nakhon Sawan, Thailand, the BBC continues to reaffirm its commitment toward shortwave broadcasting through the use of its 40 transmitters, which are located at Rampisham, Wooferton, and Daventry in the United Kingdom, and a network 95 relay stations located globally in Antigua, Ascension, Berlin, Cyprus, Singapore, Lesotho, Seychelles, and in North America at Sackville,

Canada. It should be no surprise that the BBC "came in the best" when Gorbachev was reported to have listened to several shortwave broadcasters during the failed Soviet coup in 1989.

The BBC is also relayed 24 hours a day via satellite on Asia Sat 2 for coverage of Central Asia, South Asia, and the Asia-Pacific region, and to Europe and the Western CIS via Eutelsat F4.

### ■ The BBC's Future Role

Beyond new technology that is transforming international broadcasting, Mytton indicated that the BBC's core mission continues as always, "playing a role (in countries) where information is in short supply ... and to provide information that is free from political interference and commercial pressures."

With the explosion of information globally as a result of new technologies such as the internet and the fax machine, the BBC's role in the 21st century might evolve into a kind of information gatekeeper. Mytton remarked, "In a world of bewildering choices of information ... the BBC could have a role as a reference point to obtain significant information."

From its first shortwave broadcasts in 1938 in Arabic, the BBC has grown to be appreciated by shortwave listeners for its unique tradition and unblemished reputation. While the current restructuring at the BBC reflects the strains many international broadcasters are experiencing, the World Service has reaffirmed its mission of providing accurate and high-quality news and should remain an indispensable source for the latest in global news and information.

## Last Bastion of Civilization?

BBC radio received a bizarre tribute when a historian said the end of British civilization in a nuclear war would be official when the BBC ceased broadcasting.

In the preface to a book called *Muddling Through*, Peter Hennessy said the final check by commanders of Britain's nuclear submarine fleet in the north Atlantic after a pre-emptive nuclear strike would be to turn on the BBC. A deadly hush on the airwaves would be the signal for submarine commanders to open envelopes containing their final instructions for retaliation from the prime minister.

"If the Trident commander could not pick up *Today* (a BBC news programme), that would be that," he told *The Independent* newspaper. He would then have to decide whether to launch the missiles, or go off to New Zealand. He would know there was no point in going back to base," Hennessy said.


The professor of contemporary history at London's Queen Mary and Westfield College described the procedure as "a final if macabre tribute to a broadcasting service sans pareil."

*Based on a Reuters news story submitted by David R. Alpert, KB2LUM*



# WiNRADiO™

Radio technology is about 100 years old.  
Personal computers are about 20 years old.  
Two significant technologies that changed the world.  
Now united in WiNRADiO.  
The world's most surprising communications receiver.

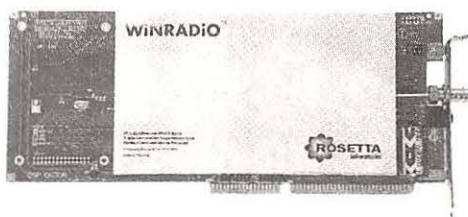

*The WiNRADiO card: plug it in and transform your PC.*



*The WiNRADiO software: enjoy the virtual control panel.*

Frequency	Country	City	Class	Category	Mode	Power	Latitude	Longitude	Comments
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	
1273.025	USA	St. Louis	FM	FM	FM	100W	38.63	-90.23	

*The optional WiNRADiO World Station Database Manager:  
includes over 300,000 frequencies, fully integrated with WiNRADiO.*

"The sensitivity seems to be pretty good across the whole range...  
...unique and useful monitoring product...worth a serious look."  
Monitoring Times, October 1996

"...high quality workmanship, good reception and easy usage."  
Chip, November 1996

"WiNRADiO has enticing possibilities... The manual is an exciting book not  
only because of its beautiful cover, high quality paper, and easy instructions,  
but also because it contains a mix of operating and technical informations  
about various aspects of radio you might have forgotten or never knew."  
World Scanner Report, Volume 6, No. 7

For the latest information on WiNRADiO, visit us on <http://www.winradio.com>

## Dealers

### USA

Advanced Digital Systems  
St. Louis, MO  
(314) 791-1206

Amateur Electronics Supply  
Milwaukee, WI  
(800) 558-0411

CB City  
Westhaven, CT  
(203) 932-3832

Electronic Distributors Corp.  
Vienna, VA  
(703) 938-8105

Electronic Equipment Bank  
Vienna, VA  
(800) 368-3270

Grove Enterprises  
Brasstown, NC  
(800) 438-8155

Professional Wireless  
Orlando, FL  
(407) 240-2880

Radio City  
Mounds View, MN  
(800) 426-2891

Radioware  
Westford, MA  
(800) 950-9273

Scanners Unlimited  
San Carlos, CA  
(415) 637-0561

SSB Electronic USA  
Mountaintop, PA  
(717) 868-5643

The Communication Source  
Arlington, TX  
(800) 417-8630

The Ham Station  
Evansville, IN  
(800) 729-4373

Universal Amateur Radio  
Reynoldsburg, OH  
(800) 431-3939

### Canada


Durham Radio  
Oshawa, Ont.  
(905) 436-2100

Dealer enquiries invited.  
[info@winradio.net.au](mailto:info@winradio.net.au)



# Ah, Music and Shortwave Radio ...

Where, surprisingly, the variety of available music surpasses that of any other domestic medium, providing listeners with a kind of ...

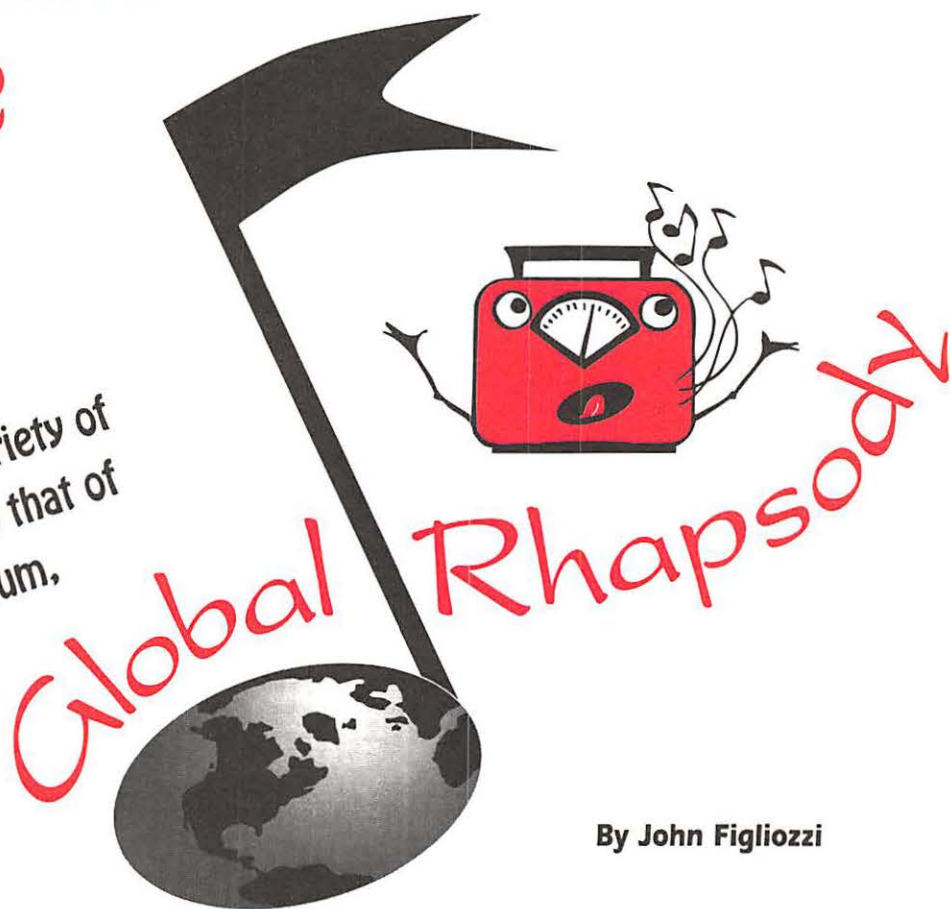

By John Figliozi

To an audiophile, the mere thought of listening to music on shortwave radio might be enough to set teeth on edge. But the true lover of music has to take a more open-minded point of view.

The simple fact is this: The scope of music available on shortwave is vastly superior to that offered by conventional domestic media. And given decent signal levels and even minimal efforts to improve the audio output of one's receiver—even if only by use of a quality set of headphones or a powered accessory speaker—the sound quality can be made truly acceptable to all but the most sensitive ears.

Music programs represent a fraction more than 11% of the titles found in *The Worldwide Shortwave Listening Guide* database, which I compile. That number, even without considering programs in languages other than

English, exceeds the space available in this column. So, inasmuch as some types of music are readily accessible from domestic broadcasters as well, as shortwave, we will concentrate here on the genres and programs that offer shortwave listeners a clear alternative.

The listings presented are intended to provide a useful compendium of music programs that will broaden your musical horizons. To find the frequencies and parts of the world to which these programs are transmitted, consult the Shortwave Guide section of this magazine. Times and days are in UTC. While the programs and times noted were correct at deadline and efforts have been made to reflect regular seasonal changes, stations of course can make changes at any time. *An asterisk (\*) denotes a time listing that will likely become one hour later with the change from summer to standard time in the autumn.*

## ■ Folk and Non-Western Indigenous Music

### Radio Australia

- *Blacktracker* (Aboriginal music and performances hosted by Mal Honess) on Wed. at 0531 and 1731.
- *Music Deli* (music from a variety of cultures—primarily Asia and the Pacific) on Fri. at 0531 and 1731.

### All India Radio

- The schedule of All India Radio relies heavily on the presentation of Indian and subcontinental music in all its forms, usually in five to fifteen minute blocks inserted between informational programming. I won't pretend to know the intricacies involved in distinguishing devotional music from light Karnatak or Hindustani classical music. The Indian cinema is wildly



popular and this is reflected in many of the music programs on All India Radio which regularly present popular film songs. My personal preference happens to run toward the classical instrumental genre.

- Rather than list each of the programs (there are at least 27 named music programs on the air on 99 different occasions during the week), be assured that you can hear Indian music on All India Radio virtually any time you choose to tune in.



*QSL from Radio Egypt showing the Cairo broadcasting facility.*

#### BBC

- *Andy Kershaw's World of Music* (a cosmopolitan mix of sounds) on the America/Europe stream Sat. at 0830 and 2330; the Africa stream Fri. at 1130 and Sat. at 1830; the Asia stream Mon. at 1830, Thu. at 1030 and Fri. at 0730.
- *Jive Zone* (showcasing African contemporary music) on the Africa stream Sat. at 1130 and Thu. at 1615.

#### CBC Northern Quebec Service

- *A Propos* (the only program available to listeners outside Quebec that showcases both traditional and contemporary music of Quebec) on Sun. at 0205.\*
- *Music in Nunavik* (featuring Inuit musical performances) on Fri. at 0105.\*

#### Channel Africa

- *Sounds of Soweto* (today's vanguard of South African popular music) on Mon. at 0438 and Sat. at 0335.

#### China Radio International

- *Music From China* (Chinese traditional music and folk songs) on Sat. at approximately 1240, 1340, 1440, 1540, 1640, 1740, 1940, 2040, 2140 and 2240; Sun. at approximately 0040, 0340, 0440, 0540, 0940 and 1040.
- *Song of the Week* (a selection from Chinese traditional to contemporary music) on Sun. at approximately 1245, 1345, 1445, 1545, 1645, 1745, 1945, 2045, 2145 and 2245; Mon. at approximately 0045, 0345, 0445, 0545, 0945 and 1045.

#### HCJB

- *Musica del Ecuador* (Andean folk music hosted by Jorge Zambrano) on Mon. at 0630; Fri. at 0800, 0930 and 1930; Sat. at 0130, 0430 and 0830.

#### Radio Korea International

- *Echoes of Korean Music* (selections of traditional Korean music) on Sun. at 1210, 1610, 1910 and 2110; Mon. at 0210 and 0810.

- *Notes of Nostalgia* (more Korean traditional music) on Fri. at 1045\*, 1245, 1645, 1845\*, 1945 and 2145; and Sat. at 0245.

#### Radio Canada International

- *Global Village* is a unique program presenting on-site reports (many from listeners) and music from cultural events around the world. It has an eclectic schedule arriving for six or eight weeks at a time and just as quickly disappearing. Most recently, it was carried Mon. at 1210\* and prior to that Sun. at 2230\*.

#### Radio Portugal International

- *Musical Kaleidoscope* (Portuguese music-folk to modern) on Tue. at 1345\* and 2015\* and Wed. at 0345\*.

#### Spanish Foreign Radio (REE)

- Spanish folk music series on Sun. at 2122\* and Mon. at 0022, 0122 and 0522.

#### Radio Netherlands

- *Music 52/15* (music from around the world hosted by Martha Hawley) on Tue. at 0853, 1053, 1453, 1853 and 2353; Wed. at 0153.

#### Radio New Zealand International

- *He Waiata* (traditional and contemporary Pacific Island and Maori music and musicians) on Wed. at 0405, 0717 and 2115.

#### Swiss Radio International

- *Sounds Good* (traditional Swiss music) at 0115, 0415 and 1345\* on the Sun. after the 3rd Sat. of each month; 0445 on the Mon. after the third Sat. at each month; and at 0615, 0915, 1115, 1315, 1515, 1715\*, 1815 and 2015.

#### Voice of America

- *Music Time in Africa* (traditional and modern African music hosted by Rita Rochelle) Sun. at 1730 and 1930 on the VOA's Africa Service only.

#### Voice of Free China

- *Jade Bells & Bamboo Pipes* (traditional Chinese music hosted by Carson Wong) on Mon. and Fri. at 0215, 0715, 1215 and 2215; Tue. at 0315.

#### Voice of Russia

- *Folk Box* (traditional music from Russia and its nationalities) on Sun. and Fri. at 2332\*; Mon. at 1432\*; Tue. at 0132\*; Tue. and Wed. at 1132\*; Wed. and Sat. at 0832\*; Thu. at 0432\* and 2032\*; Fri. at 1732\*.

#### WRNO

- *La Voix de la Louisiane* (Cajun/Zydeco music with a French announcer) on Mon., Wed. and Fri. at 2200\*; Sat. at 2130\* and Sun. at 2100\*.
- *Louisiana Juke Box* (Louisiana music) on Wed. at 1900\*.

#### WWCR

- *American Polka Show* (polka music) on Mon. at 2100\* and Sat. at 1400\*.

#### Jazz


Even though jazz is so quintessentially American in its origins, it curiously is the least represented music format on North American domestic radio stations. Fortunately for you and me, shortwave radio offers a nice selection of programs devoted to this art.

#### Radio Australia

- *Jazz Notes* (the best of Australian jazz hosted by Ivan Lloyd) on Tue. at 0531 and 1731.

#### BBC

- *Jazzmatazz*, a new BBC approach to jazz programming, begins in June and will pre-

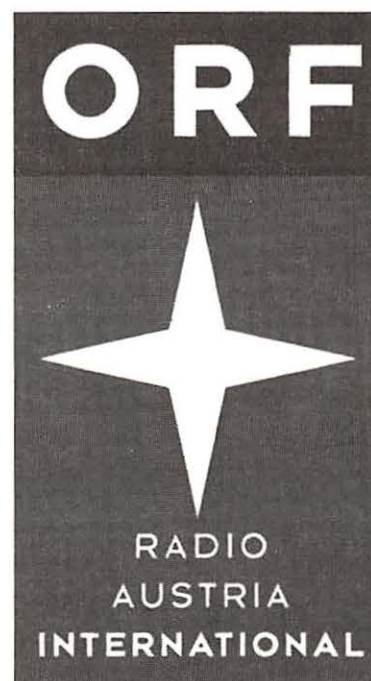



sumably run during the same time frames and be hosted by Malcolm Laycock, as is the eight part Jazz Expo anthology series which began in April. Listen on the America/Europe stream Sun. at 0730 and Mon. at 1130; on the Africa stream Tue. at 1130 and Thu. at 0830; and on the Asia stream Mon. at 0630 and Tue. at 1030.

#### **CBC Northern Quebec Service**

- *Jazz Beat* (studio sessions and concert recordings) on Mon. at 0305\*. (This program can also be heard at 11:05pm local time in each North American time zone on CBC Radio network medium wave frequencies.)

#### **Channel Africa**

- *Africa: All That's Jazz* on Sun. at 1530 and Tue. at 1730.

#### **Deutsche Welle**

- *Jazz!* on Fri. at 2140 and 2340, Sat. at 0240 and 1640.
- *Saturday Special* on Sat. at 0940 and 1140.

#### **Radio Habana Cuba**

- *The Jazz Place* (the best of Cuban jazz) heard every other Sun. at 2130 and Mon. at 0130, 0330 and 0530.

#### **Radio New Zealand International**

- *Change of Pace* on Sat. at 0530.
- *In the Mood* (late night jazz) on Sat. at 1130.

#### **Voice of America**

- *Music USA Jazz* (archival selections of the late Willis Conover's historic and long-running program) on Sat. at 1410 and 2010.
- *Music USA Standards* (American vocalists and big bands) on Sun. at 1930 on frequencies directed to the Middle East and the Pacific.

#### **Voice of Russia**

- *Jazz Show* (jazz from Russia) on Mon. at 0432\*; Tue. at 1732\*; Wed. at 1432\*; Thu. at 1132\* and 2332\*; Thu. and Sat. at 0132\*; Fri. at 0832\* and 2032\*.

#### **WRNO**

- *Jazz '30* (Dixieland jazz) on Mon., Wed. and Fri. at 2130\*; Sat. at 1530\* and Sun. at 2330\*.

- *New Orleans Jazz Club* on Sun. at 2130\*; Tue. and Thu. at 2200\*; Sat. at 2000\*.

#### **■ Music Request Programs**

Got something you want to hear? Write, e-mail, fax or phone one of these programs and they'll fill the bill for you. Listen in for instructions on how and where to send.

#### **Radio Australia**

- *At Your Request* (Dick Patterson plays listener requests) on Sun. at 0330 and 0730.

#### **All India Radio**

- *Listeners' Choice* on Thu. at 1346.

#### **BBC**

- *A Jolly Good Show* (records, requests and dedications hosted by Dave Lee Travis) on the America/Europe stream Sat. at 1215 and Sun. at 0630; on the Africa stream Sat. at 0830 and Sun. at 1830; on the Asia stream Sat. at 1715 and Sun. at 0730.
- *Anything Goes* (listener requests of music and other types of sound recordings with Bob Holness) on the America/Europe stream Sun. at 1130; on the Africa stream Tue. at 0830 and Thu. at 1130; on the Asia stream Sat. at 1030 and Sun. at 2330.
- *Greenfield Collection* (listeners request classical music selections from host Edward Greenfield's extensive collection) on the America/Europe stream Sun. at 0830 and Tue. at 1530; on the Africa stream Sun. at 0830; and on the Asia stream Sat. at 2130 and Sun. at 0830.

#### **Channel Africa**

- *Yours for the Asking* on Sat. at 1508.

#### **Deutsche Welle**

- *Hallo Africa* (musical requests and greetings) Mon. thru Fri. at 0930.

#### **Polish Radio Warsaw**

- *Request Concert* (classical music requested by listeners—mainly Chopin pieces) on Mon. at 1730 and 2000; Tue. at 1230.

#### **Radio Budapest**

- *As You Please* (listener requests for Hungarian music and performers) on the 4th Sun. of the month at approximately 1915\* and 2115\*; on the 4th Mon. of the month at 0115\* and 0245\*. (Radio Budapest's schedule is somewhat quirky. This program may appear one month, but not the next.)

#### **Radio Jordan**

- *Listeners' Choice* (Western popular music requested by listeners) on Sun. starting just after the 1500 newscast.

#### **Radio New Zealand International**

- *Pacific Requests* on Sat. at 0512.

#### **Radio Singapore International**

- *To Each His Own* (listener dedications and song requests) on Tue. at 1305.

#### **Voice of America**

- *Border Crossings* (listeners from outside the USA may request selections from any form of American music) Mon. thru Fri. at 2010 on frequencies directed to Europe and the Middle East only.

#### **Voice of Russia**

- *Music At Your Request* (normally a place for listeners to request classical music by Russian composers and performers, folk music on occasion) on Mon. and Sat. at 1132\*; Tue. at 0832\*; Wed. at 0432\*, 2032\* and 2332\*; Wed. and Fri. at 0132\*; Thu. at 1732\*; Fri. at 1432\*.
- *Your Top Tune* (contests and popular music requests for and by listeners) on Sun. at 0832\* and 1332\*; Sun. and Wed. at 0232\*; Mon. at 2032\*; Tue. at 0732\* and 2332\*; Thu. at 2232\*; Fri. at 1632\*; Sat. at 1232\* and 1732\*.
- *Yours for the Asking* (classical music requests) on Mon. at 0832\* and 2332\*; Tues. at 0432\* and 2032\*; Tue. and Thu. at 1432\*; Wed. at 1732\*; Fri. at 1132\*.

#### **■ Other Notable Programs**

This is admittedly a subjective list, but do give these selections a try. Until next time, pleasant listening!

#### **BBC**

- *Composer of the Month* (month-long weekly series combining the biography and music of a great classical composer) on the America/Europe stream Thu. at 0730; on the Africa stream Tue. at 0800; and on the Asia stream Mon. at 1930, Tue. at 0630 and Thu. at 1530.
- *John Peel* (presenting the cutting edge of contemporary "alternative" music with a sardonic wit) on the America/Europe stream Thu. at 1530 and 1930, Fri. at 0830; on the Africa stream Sat. at 0230 and Mon. at 1130; on the Asia stream Tue. at 0730 and Fri. at 0430.

#### **HCJB**

- *Inspirational Classics* (classical music inspired by religious themes) on Thu. at 2030; Fri. at 0230, 0530 and 0830.



**WORLD SERVICE**





#### Radio Austria International

- *Music From Austria* (ah, those waltzes and other Austrian performances as well) at approximately fifteen minutes into each broadcast starting with the 1330 transmission on Sat. and ending with the 0830 broadcast on Sun.

#### Radio Habana Cuba

- *From Havana* (a program showcasing contemporary Cuban performers) on Sun. at 2235; Mon. at 0235, 0435 and 0635.
- *Top Tens* (featuring current Cuban top hits) heard every other Sun. at 2130 and Mon. at 0130, 0330 and 0530.

#### Radio New Zealand International

- *Cadenza* (a daily concert of light classics) Mon. thru Fri. at 0130.
- *On the March* (a one of a kind program of military band and parade music) on Tue. at 1130 and Thu. at 0915.

#### Radio Prague

- *Encore!!!* or *Life in Prague* or *Magic Carpet*. Radio Prague presents a weekly musical feature that sometimes is an interview or profile, and other times a concert of folk, popular or classical music. It begins approximately five minutes into all Sat. broadcasts except the 0000, 0100 and 0300 broadcasts to North America, when the program is heard on Sun. (UTC).

#### Radio Sweden

- *Sounds Nordic* (a program of Swedish and Scandinavian rock music including interviews with artists and performers) on the second and fourth Sun. of the month in all broadcasts, except those to the Americas at 0030, 0230 and 0330 when the program is heard on Mon. (UTC).

#### Radio Vlaanderen Internationaal

- *Music From Flanders* (featuring Belgian performances and artists) on Sat. at approximately 0637\*, 0937\*, 1307\*, 1807\*, 2107\* and 2337\*. RVI also presents notably pleasant musical selections in the five minute periods between language service changes.

#### Swiss Radio International

- *Rendezvous with Switzerland* (a very pleasant and wide variety of musical selections interspersed with informational items about

Switzerland) Mon. thru Sat. at 1330\* and Tue. thru Sun. at 0430.

#### Voice of America

- *Concert Hall* (classical music composed or performed by American artists) on Sun. at 1410 and 2010.
- *World of Music* (popular music with African roots hosted by Rita Rochelle) Mon. thru Fri. at 1934.

#### Voice of Russia

- *Music and Musicians* (showcasing Russian compositions and performers—usually classical) on Sun. at 1211\*, Sun. and Mon. at 0111\* and 0711\*, Sat. at 1611\* and 2111\*.

*John Figliozi is editor of The Worldwide Shortwave Listening Guide, now published and sold by Radio Shack. Watch for his next spotlight on featured programming coming in August.*

# HEAR in the CLEAR

SGC's new **PowerClear™** uses the power of advanced **Digital Signal Processing** to clear noisy, interference-plagued audio.

Reduce noise and interference from virtually any audio source—HF, VHF/ UHF transceivers, scanners, shortwave receivers, micro-wave, and telephone lines.



**PowerClear stands 3.65" high**

PowerClear attacks noise and heterodynes with advanced DSP algorithms and lets you tailor bandpass response to your individual need—separate adjustments for low and high cutoff as well as audio bandpass shift.

Cut through the noise with factory preset filters and with up to seven combinations of your choice. The bright red and green LEDs quickly show your selected filter adjustments.

Hear more with SGC's PowerClear. Call your SGC dealer now for details.

*No Compromise  
Communications*


**SGC**



SGC Inc., SGC Building, 13737 S.E. 26th St. Bellevue, WA. 98005 USA  
P.O. Box 3526, 98009 Fax: 206-746-6384 or 746-7173 Tel: 206-746-6310 or  
1-800-259-7331 E-mail: SGCMKTG@aol.com World Wide Web: sgeworld.com



# The { Multi-Band Multi-Layered Antenna Multi-Resonant

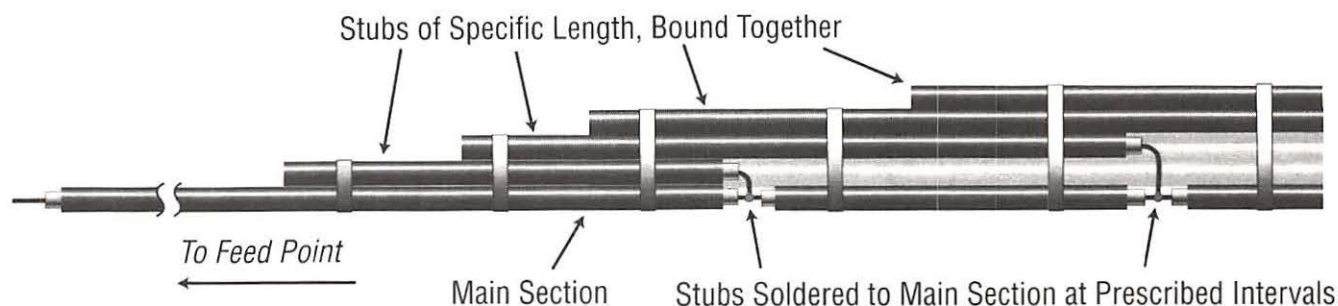

By Peter L. Barker XF1/KB6ASH

Unless you are an inveterate knob twiddler (but perhaps that's a requirement to be a *radioist*) you probably do not want to go to the expense and bother of using an antenna tuner between your communications receiver and a random wire antenna. We commonly call these black boxes antenna *tuners*, but they are really not tuning the antenna but trying to match the impedance of the antenna/feedline combination to that of the receiver. They do nothing to "tune" the antenna to resonance at the frequency in use.

It is possible to do away with the cost and bother of a tuner by building this simple multi-band resonant antenna that does not use coils, capacitors, or traps, but just wire and some cable ties! The antenna is automatically "trimmed" to the resonant length of selected bands by the use of 1/4 wavelength stubs.

What is a stub? It is simply a length of wire cut to be a specific fraction of a wavelength to perform an impedance matching or switching function on an antenna or other tuned circuit.

Unlike other multiple frequency resonant antennas, this design does not require the tedious construction of coils and capacitors to form "traps," but simply calls for measuring out lengths of wire of almost any gauge strong

*Look, Ma, no traps! Squeeze the best out of the low propagation with an efficient long wire antenna which — while requiring some mathematical gymnastics to do it right — actually tunes itself.*

enough to support its own weight plus the ability to solder a few connections. For reception purposes, the dimensions given will need no adjustment. If you build the transmitting version, some minor trimming may be needed for optimum SWR.

Although the antenna described is intended to be used as a "long wire," if you construct two identical sections and hook up as also described, they will form an excellent dipole.

For broadcast reception the antenna, as described, will operate on all bands from 90 meters (3 MHz) to 13 meters (22 MHz). (You can include the CB band and the amateur 10 meter band if you so desire with the addition of one stub.) Like all longwire antennas, this one should be operated with a good earth ground. The connection between the radio and the ground rod should be as short as possible using braid or heavy gauge stranded wire.

If your operating position does not allow this because of its location, a "counterpoise" ground will work very well even for transmitting. In this case, make two identical section of the antenna and connect one to the ground post on your radio and deploy it around the perimeter of the operating room. It does not



need to be in a straight line to work. Just do not form a small coil or bundle out of it.

## ■ Construction

How do we make this wonder? You will need about 220 feet of insulated wire. The gauge is not important but it should be strong enough to support its own weight and the strains place on it by wind and ice if you live in areas where that can be a problem. Sixteen or even 18 gauge will usually be strong enough for the base antenna; the stubs can be almost any gauge you have handy as long as it is insulated.

If you must use thin wire for the base section, bind it together with a length of dacron line to carry the weight. Remember that it must be insulated wire.

Diagram one shows diagrammatically the construction of the antenna. The stubs are shown away from the main antenna for the sake of this diagram only; they will be all bundled together and held with tape or preferably cable ties when the antenna is finished. If you use cable ties and want the antenna to be as durable as possible, use the black ultraviolet light resistant type. They cost a little more but will last many years in normal use.

The construction of the antenna is very simple. Measure off the length of the main section — 85 feet 1 inch — allowing a little extra at each end to form a loop to attach the suspension cord that will fasten the antenna to your supports. Carefully measure off the distances to the solder points and strip 1/2 inch or

so of the insulation at each point; take care not to nick the conductor. Now measure the stubs and cut to length. Strip about 1/2 inch of insulation at one end of each stub.

Bend the bare end into a "hook." Hook it over the correct solder point and solder into place. Check that you have the right stub on the solder point before soldering. Remember the old carpenter's adage: "measure twice, cut once." All that remains is to fold all the stubs back along the main dipole with their free ends toward the feed point.

The whole bundle should now be tightly secured with cable ties or exterior quality tape. The center conductor of the feedline (50 or 75 ohm coaxial cable) should now be attached to the feed point. The shield is not

connected at this end. Seal the end of the coax with silicone sealant and hoist the antenna up as high and in the clear as you can get it. Connect the feedline to your radio and you are in business.


## ■ Customizing the Design

If you wish to use this technique as a dipole rather than an end fed wire, construct two identical sections and connect the shield of the coax to one and the center to the other. This will now be the center of your antenna. A piece of plywood or plastic should be used as a support to the junction of the feedline and elements as the wire joint should not carry the train. The assembly can be used as a conventional antenna with both ends supported as high as possible, or as an inverted "V" configuration with only the center elevated.

If you wish to try the antenna on other bands for ham use or utility monitoring, the distances of the solder points and lengths of the stubs can be easily calculated. I would recommend using metric units for the measurements as this makes for less errors in calculation.

The base section must be 1/4 wavelength at the lowest frequency on which you wish to operate. This is calculated by the simple formula:  $71.5/\text{freq (in MHz)}$  for an answer in metric units, or  $234/\text{freq (in MHz)}$  for an

**DIAGRAM 1: Diagrammatic View of the Stub Antenna**

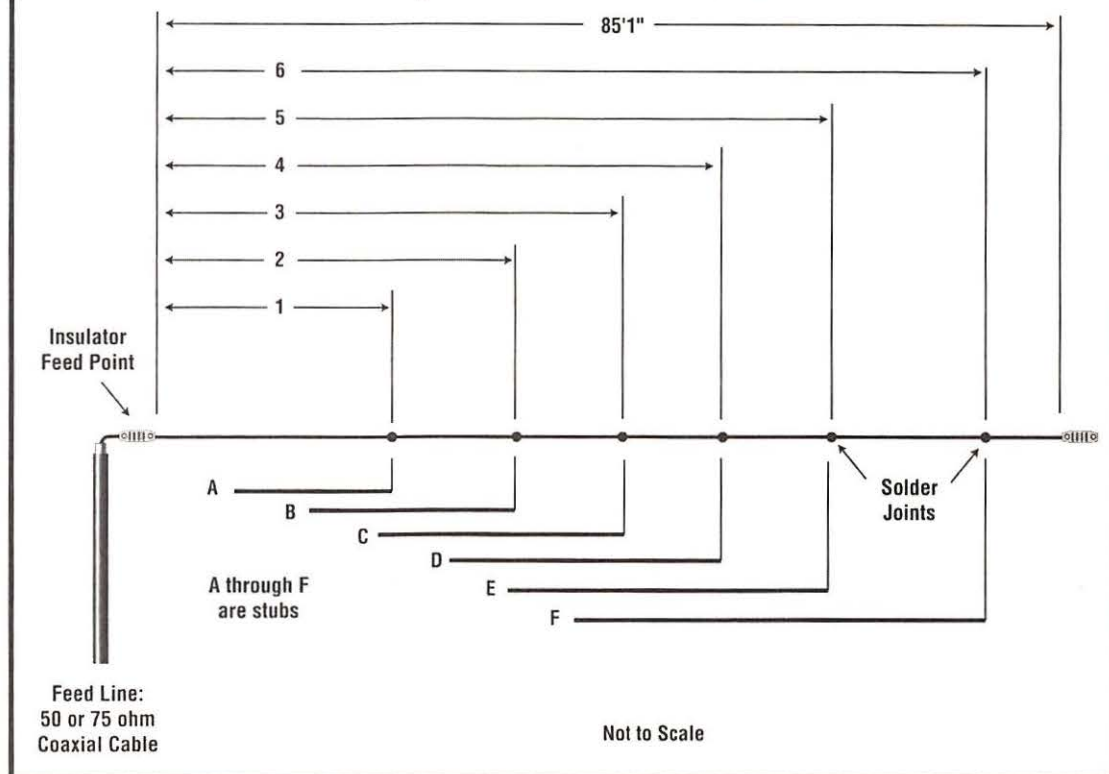


**TABLE 1: Length of stubs and solder points for selected SW broadcast bands**

Stub	Band	Length in Ft.	Length Cms.	Solder Point	Dist. from Feed Pt. Ft.	Dist. from Feed Pt. Cms.
A	13 (21 MHz)	10'5"	317	1	20'10"	634
B	19 (15 MHz)	15'1"	230	2	30'2"	460
C	25 (11.5 MHz)	10'2"	310	3	20'8"	750
D	31 (9.5 MHz)	20'4"	620	4	40'8"	1,240
E	41 (7.2 MHz)	32'11"	1,004	5	65'11"	2,009
F	49 (6 MHz)	38'4"	1,169	6	76'9"	2,339

The base length of 85 ft. 1 in. covers the 90 meter (3.2-3.4 MHz) band



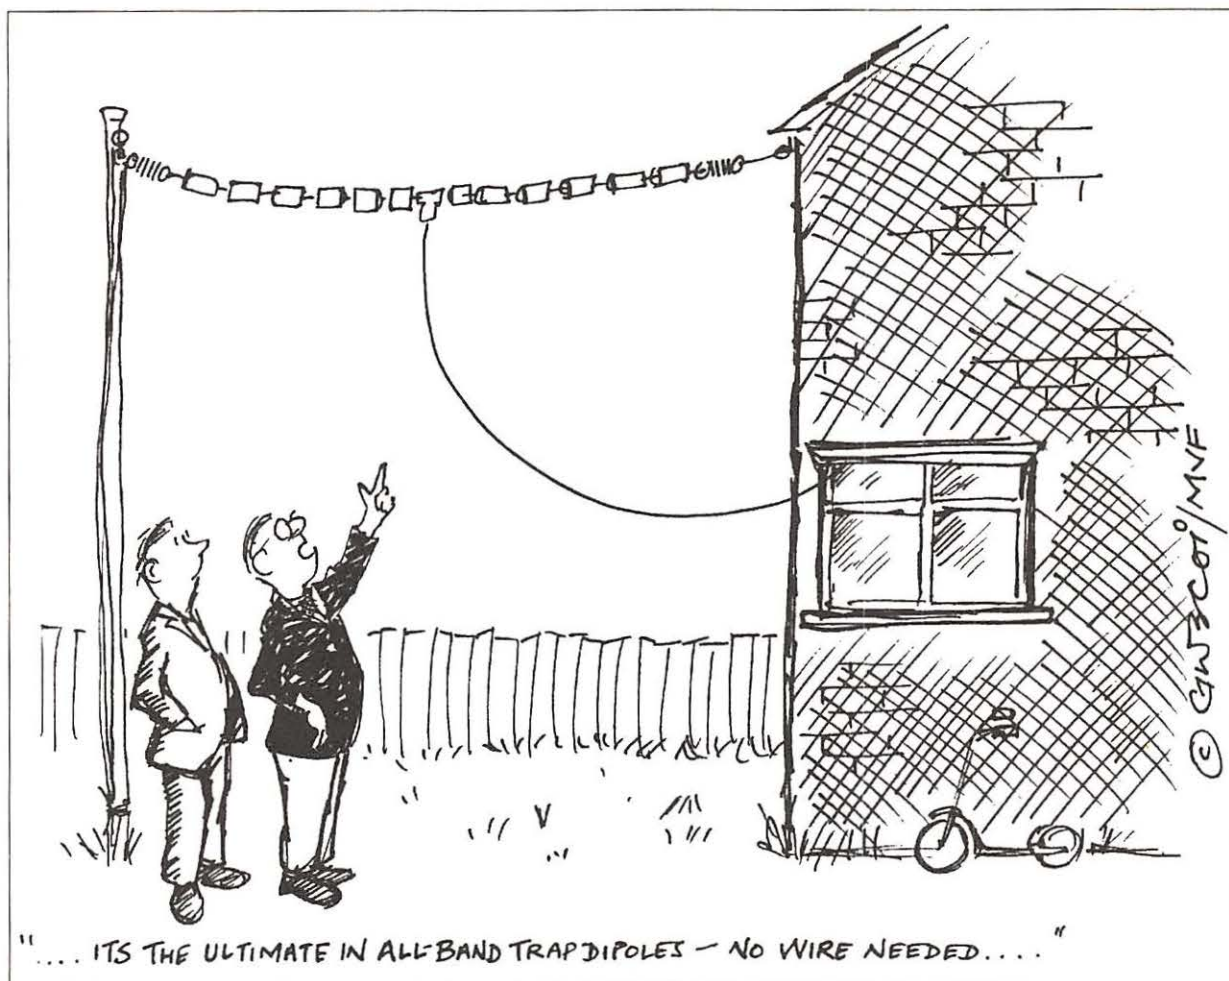

answer in feet. The stub for the next higher frequency is attached to a solder point 1/2 wavelength *from* the feed point. It will be obvious from this that the lowest frequency to be covered must be at least equal to twice the frequency of the next higher frequency. If this seems complicated, look at the diagram given and it should become clear.

Here is an example of the calculation, should you want to add the 10m ham band to the design shown here. The calculation would go as follows:

*Length of stub:*

71.5/28.4 - 2.54 meters, or 254 cms.

(or)

243/284 - 8.56 feet, or 8 ft. 6-3/4 inches

The attachment point for this would be 1/2 wavelength from the feed point or twice the stub length. In this case, 2 x 8 ft. 6-3/4 in. = 17 ft. 2-1/2 in.

If you wish to design an antenna for utility frequencies, for example, just remember that the base section must be at least as long as 1/2 wavelength of the next lower frequency on which you wish to operate. If not, there will

not be enough length to accommodate the stub and its attachment point!

A table is provided in Table 2 for the 40 meter (7 MHz) through 10 meter (29 MHz) ham bands. As the relationship of the 20 (14 MHz) and 40 meter (7 MHz) bands is harmonic, the full length of the base section is the same as the distance to the first solder point. This will be the exception rather than the rule for other services.

This antenna is much simpler to build than describe, will give you a resonant antenna on several bands, and does not require a tuner. The wire size is not critical and, in fact, you

can use different gauge wire for each section if that is what you have on hand. Like most any antenna, the higher in the clear that it can be mounted, the better it will perform. And, like all end fed antennas, it will work most effectively against a good earth ground.

Always remember when mounting antennas to keep personal safety in mind and look out for high voltage cable.

Whether you're an amateur radio operator or a shortwave listener, half the fun is using something you built yourself. Break out of the "appliance operator" mode and try this simple and inexpensive project.


**TABLE 2: Length of stubs and solder point distances for selected ham bands**

Stub	Band	Length in Ft.	Length Cms.	Solder Point	Dist. from Feed Pt. Ft.	Dist. from Feed Pt. Cms.
A	10 (29 MHz)	8' 4-1/2"	255	1	18'9"	510
B	12 (24 MHz)	9'5"	287	2	18'120"	573
C	15 (21 MHz)	11'1-1/2"	340	3	22'3"	679
D	17 (18 MHz)	12'11-1/2"	395	4	25'11"	789
E	20 (14 MHz)	16'8-1/2"	510	5	32'5"	1,109

Basic antenna length is 32 ft. 5 in. Note: In this special case the solder point E is at the end of the basic section due to the exact harmonic relationship of the 40 (7 MHz) and 20 meter (14 MHz) bands.



## AR5000 CyberScan

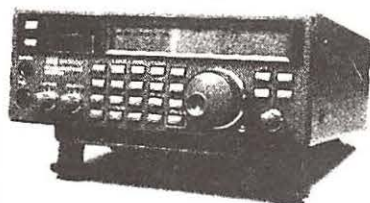

**AOR**

**Leading Edge Technology has now become available.**

The ultimate answer to your receiver needs. Prior to the AR5000, it took two, three, or even four receivers to cover the 10kHz - 2600MHz range. The small size and low power demands make the AR5000 ideal for field use, remote control radio, and local computer control. State-of-the-art components, surface mount technology & low noise circuits and devices assures the widest dynamic range and greatest sensitivity.


### Specifications:

Freq. Range: .....10kHz - 2,600MHz  
 Modes: .....FM, AM, LSB, USB, CW, Special  
 I.F. Bandwidth: .....3,6, 15, 40, 110, 220, 0.5kHz (Opt.)  
 Memory: .....1000 channels (10 banks/100 ch.)  
 Triple Conversion: .....I.F. 622.2, 10.7 & .455MHz  
 Programmable Step: .....1 Hz to 999.999kHz  
 Search Speed: .....50 step/sec. (less than 100kHz steps)  
 Scan Speed: .....50 ch/sec.

## AR8000...STILL THE BEST!


The Ultimate Handheld Receiver! "WELCOME TO THE WORLD OF THE AR8000". It incorporates the latest PLL technology and offers a multitude of features including true carrier re-insertion SSB (CW) demodulation with 50Hz frequency steps. 4 level alpha numeric LCD indicates the frequency, signal strength, band scope and more. Selectable squelch system, auto-mode, auto-band-plan, serial communication port are all standard. Internal ferrite antenna offers high performance reception below 2MHz.

- Frequency Coverage 500 kHz - 1900 MHz
- All mode reception AM, NFM, WFM, USB, LSB & CW

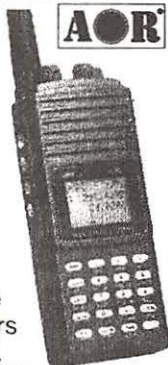

## AR7030..."Superior by Design"

The introduction of the all new AOR AR7030 shortwave receiver is offered to the discerning and dedicated listener. The AR7030 is the result of a combined project between AOR and a UK designer. The AR7030 represents the very latest and best design, featuring exceptionally strong signal handling and bristling with enhanced features.

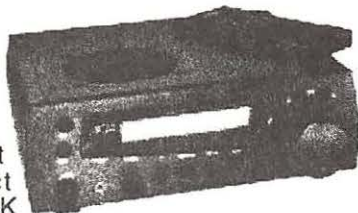

**AOR**

### Key Features:

- Frequency coverage 0 - 32 MHz
- Mode reception: USB, LSB, CW, AM, Synchronous AM, NFM, DATA
- Very high dynamic range
- >100dB in AM mode w/ 7kHz filter
- >105dB in SSB mode w/ 2.2kHz filter
- >110dB in CW mode w/ 500Hz filter
- Standard fitted filters - 4 standard and two optional

## EDCO brings you the FINEST Radios!



### Electronic Distributors

325 Mill St. Vienna, VA. 22180

703.938.8105 - FAX: 703.938.4525

www.elecdist.com

## LOWE SRX100



The new SRX100 is an economy communications receiver intended for the newcomer to shortwave listening, or as a second receiver for the more experienced enthusiast. It sells for well under half the cost of our most popular receiver, the HF150, but has an excellent specification for the price.

- Frequency range 30kHz to 30MHz
- 1kHz tuning steps
- 1μ sensitivity
- Modes available: USB, LSB, AM
- Liquid crystal display
- Dimensions: 7.3"W x 7.5"D x 2.5"H



## HF150 RECEIVER



**Don't let the size fool you! This is one of the finest Shortwave Receivers on the Market today!**



### Specifications

*Frequency coverage:* 30kHz to 30MHz cont.  
*Reception modes:* LSB, USB, AM, Synchronous AM (USB, LSB, DSB)  
*Receiver system:* Microprocessor controlled PLL tuning, dual conversion superheterodyne receiver.  
*Intermediate Frequency:* First IF 44.999MHz to 45.000MHz; second IF 455kHz  
*Display:* 5 digit LCD showing frequency to nearest 1kHz, receiver mode, and memory number  
*Tuning:* By spin-wheel, and direct entry keypad (opt.)  
*Tuning steps:* 8Hz in LSB, USB, & AMS modes; 60Hz in AM. (Step size increases w/ rapid spin-wheel rotation.)  
*Memories:* 60 memories holding frequency and mode.  
*IF Filters:* Wide: 7kHz, Narrow: 2.5kHz

## HF250

The Lowe HF250 is set to become the new world standard for mid-priced receivers. Building on the worldwide success of Lowe's HF225 and HF150 models, the new HF250 combines Lowe's traditional high standards for performance and quality of construction together with the advanced facilities and control features required by today's discerning listener.




### Features

- Freq. Coverage 30kHz - 30MHz
- Tuning step size 8Hz
- Backlit display
- 255 memory ch.
- Computer control is standard via built-in RS232 port



# Monitoring Montauk

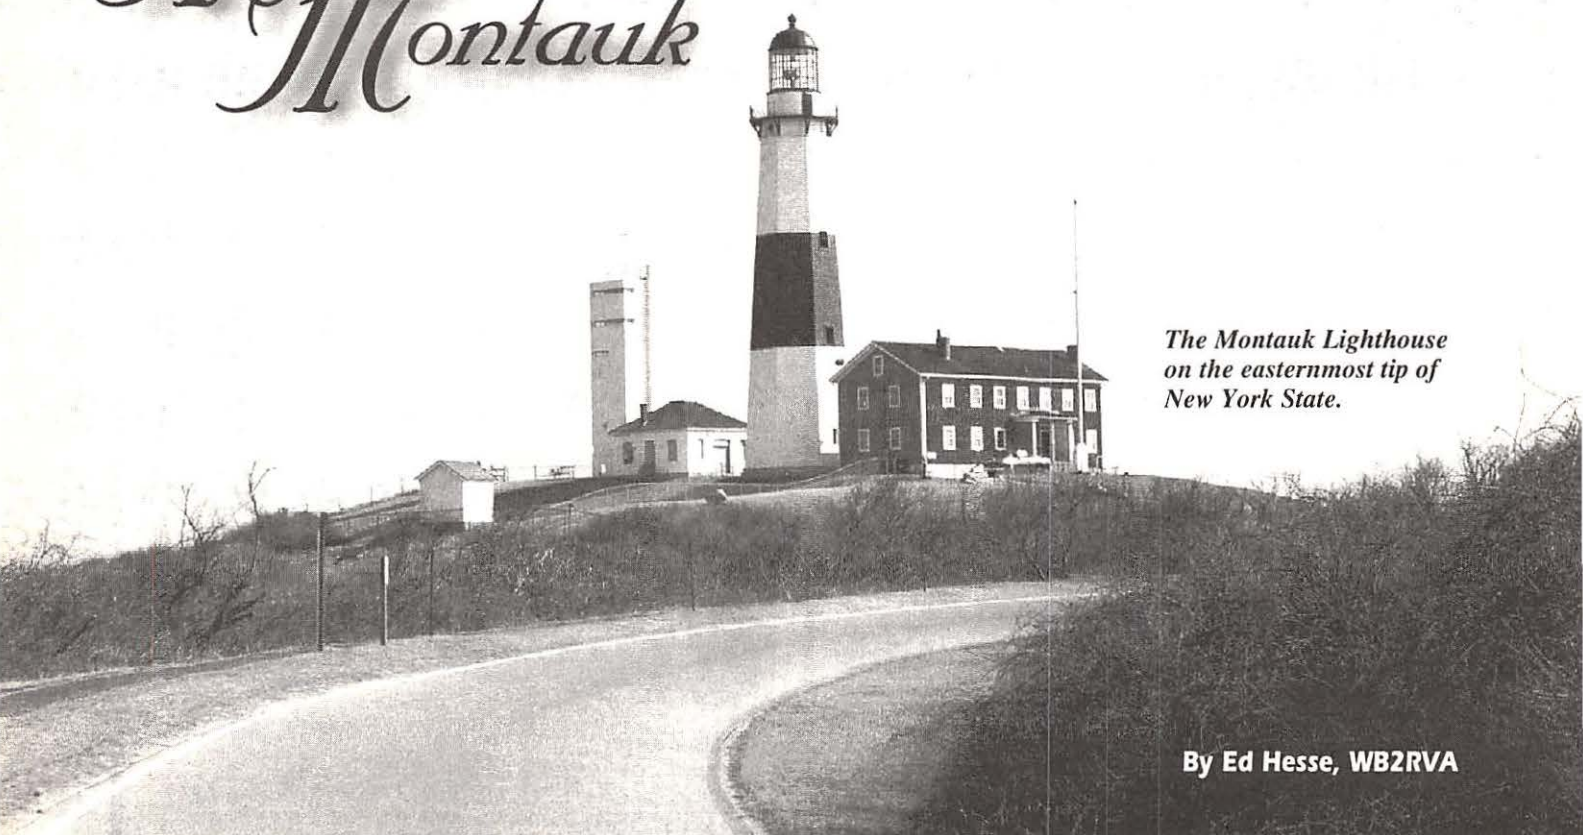

*The Montauk Lighthouse  
on the easternmost tip of  
New York State.*

**By Ed Hesse, WB2RVA**

**H**ow would you like a vacation — or a long weekend getaway — where you could combine your radio monitoring hobby with sandy beaches, unique sightseeing opportunities, world-class shopping, and a relaxed life style that will make you want to stay on as a permanent resident?

If you answered “yes” to any or all of the above, try Montauk. Montauk is in the shadow of the historic Montauk Point Lighthouse, the eastern-most tip of New York State. After Montauk, the “next stop” is Europe.

Montauk is a village in the Town of East Hampton, an area of Long Island in which the famous “Hamptons” are found. The Hamptons are a lure for the affluent, upbeat, upscale (and, frequently, famous) people who escape New York City and its environs during the summer months in search of sun, leisure, pleasure, relaxation, and entertainment.

## ■ Interference-Free Monitoring

For radio monitors, Montauk — in its off-the-beaten-track location — offers an

RFI-free zone. Bring your radios (AM, FM, shortwave, and scanners), and literally listen to the world, free from radio-frequency interference. Your author, using Radio Shack’s DX 440 and its “scan” feature during daytime hours, clearly monitored 35 FM stations, with programs ranging from classical music at Southampton College to easy-to-listen-to musical standards from WBAB in Babylon. Fifteen AM stations from the tri-state (New York, Connecticut, and Rhode Island) area were heard clearly in the daytime.



*Bring your 4x4 right down to the ocean*

At night, the shortwave stations rolled in. For example, at 0000 UTC in April, it was child’s play to pull in China (9710 kHz), Madrid (6055 kHz), England (5975 kHz), and the USA (13740 kHz). Be sure to bring the current copy of *Monitoring Times* to guarantee that you’ll hear all the shortwave stations that are out there.

Scanner monitoring offers a number of challenges. Montauk isn’t a metropolitan area, chock-full of public service frequencies. You have to know where to look. Police activity was heard on 158.94, 155.91, 155.37, 156.03, and 159.21 MHz (during the summer months, police activity increases substantially, especially on weekends). A ham radio “weather net” from New London, Connecticut, was heard on 147.06 MHz.

Since Montauk is popular for its fishing, try searching the Marine frequencies between 156 MHz and 162 MHz. You’ll hear marine band users ranging from commercial fishermen to the Coast Guard operating out of its Montauk Station. And speaking of searching, look over the tips I gave in my article, “Try Searching.”



in the May 1995 issue of *MT*. You'll never know what you can uncover at Montauk!

### ■ More than Monitoring

Of course, radio is only part of the fun of Montauk. Montauk offers a number of attractions. Its public sandy beaches run for miles, offering you ocean swimming, surfing, and just plain lounging in the sun, acquiring a great tan. No trip to Montauk is complete without a trip to "the Point." The lighthouse at Montauk — the oldest in New York State — was commissioned by President George Washington over 200 years ago. Drive to the Point, park in its ample parking lot, and climb the 137 steps to the top of the Lighthouse for an unparalleled view. After that, stop in the restaurant for a snack and souvenirs, and then walk the pristine beaches. Be sure to bring your camera and plenty of film. Don't forget the binoculars, either!

Back in your car, drive to the north edge of the "south fork" and see Montauk Airport, the eastern-most airport in New York State, and only 12 air minutes away from Block Island. If time permits, take the charter service over



*Main Street of East Hampton on a sunny spring day*

to Block Island on New England Airlines, and see an island which can give you an appreciation of the area's geologic history. On the island, you'll meet vacationers who took the ferry from New London, Connecticut. (Tune to 156.015 MHz to monitor the ferry.)

Following along the north edge, you'll circumnavigate Lake Montauk and arrive at Gosman's Dock, a popular tourist stop. Then drive over to Star Island for a view of the Coast Guard Station. Would you like to take a "whale watch cruise"? The boat's right here, waiting for you. Don't worry about getting off the beaten track as you drive through the byways of Montauk. You can't get lost, and

you'll see a Montauk most tourists never see.

If you want to spend a few days in Montauk, there's a wide variety of accommodations available, ranging from a one-bedroom cottage to a lush suite at Montauk Manor, a hotel known locally as "an American castle." The Montauk Chamber of Commerce offers a free Vacation Guide (call 516-668-2428) to help you select a place that's just right for you.

If you're a camper, don't overlook the Camp Grounds at Hither Hills State Park. You can "camp out" with a beautiful view of the Atlantic Ocean, and the price can't be beat. Reservations are a *must*! Be sure to book early in the season. Call 516-668-2554 for more information.

### ■ Don't Miss East Hampton

Part of the Montauk experience includes a visit to East Hampton, possibly the most beautiful village in the United States. It's several miles to the west of Montauk, a scenic drive that is well worth the time. Its main street is Route 25 — Montauk Highway — and you'll



## More than a Dozen Reasons To Buy Scanner Master Books!

### Monitor America — 3rd Edition

A complete listing of public safety and business radio communications — \$29.95; Order BOK63-95.

### Monitor the World

Discover and monitor the frequencies of law enforcement and military agencies in nations around the world — \$19.95; Order BOK13DS.

### National Sports & Recreation Frequency Directory

Thousands of listings for recreational and amusement operations — \$13.95; Order BOK 90.

### Scanner Master Guides

Undoubtedly the most accurate and comprehensive scanner/radio guides ever printed.

- Massachusetts Guide — \$29.95; Order BOK11DS.
- Upstate New York Guide — \$29.95; Order BOK44DS.
- Fourth edition D.C., Delaware, Maryland, and Virginia Guide — \$29.95; Order BOK57DS.

- Illinois Communications Guide — \$29.95; Order BOK60DS.

- New York Metro Guide — \$38.95; Order BOK109DS.

### Pocket Guides

Includes police fire, ambulance, DPW, emergency management, and other local government frequencies for every community in each state.

- Massachusetts, Rhode Island & So. New Hampshire, 6th edition with latest update sheet — \$13.95; Order BOK39DS.
- Maine, New Hampshire and Vermont — \$13.95; Order BOK40DS.
- Chicagoland — \$13.95; Order BOK61DS.
- Greater Philadelphia/South Jersey, 3rd edition — \$13.95; Order BOK55DS.
- New York Metro/Northern New Jersey — \$13.95; Order BOK49DS.

Grove Enterprises, 7540 Hwy. 64 W., Brasstown, NC 28902; (800) 438-8155, (704) 837-9200, Fax (704) 837-2216; [www.grove.net](http://www.grove.net)





*The Montauk Coast Guard Station.*

find hundreds of stores that will give you the feeling that you're shopping on Fifth Avenue. The pace is leisurely, and the dress code politely informal. Bring your credit cards, and don't forget your camera. East Hampton is a reminder of a more genteel era of classic, historic homes. A tip to drivers: those "20 miles an hour" zones around the town's schools are strictly enforced by a no-nonsense police force.

### ■ So When Do I Monitor?

There's so much to do at Montauk that you'll have to budget your time. Use early morning hours to monitor the marine frequencies and hear the fishing boats going out. Program your car radio with locally-heard AM and FM stations (see Table 1 for suggested frequencies) as you drive about, seeing the sights.

**Table 1**

#### AM Stations

550 kHz	630	760	790
960	980	1010	1030
1080	1230	1300	1310
1420	1510	1540	

#### FM Stations to Monitor

87.9 MHz	88.3	88.5	89.1
90.3	91.1	92.3	93.7
95.3	95.7	96.7	97.3
97.5	96.7	97.3	97.5
97.7	98.1	98.3	98.7
99.1	99.3	99.9	100.9
101.3	101.7	101.9	102.3
102.9	103.3	103.7	104.1
104.7	105.1	105.5	105.9
106.5	106.9		

Since New York State law prohibits the use of a scanner in an automobile (even if you're a licensed radio amateur), you'll be scanning at the beach or in your housing accommodations. A portable scanner — with a power supply — will let you tune in to all the local action. And when the day is over and the sun sinks into the western sky, what better time to listen to the shortwave stations that

roll in like waves on the shore?

### ■ All Roads Lead to Montauk

Yes, all roads do lead to Montauk, including the Long Island Railroad (LIRR). Montauk is the last stop on this world-famous commuter railroad. If you'd like to bypass the inevitable "Hamptons traffic jams" of Friday evening and Sunday afternoon, consider the LIRR. The railroad will take you to Montauk all the way from Pennsylvania Station, located in the heart of midtown Manhattan in New York City. Table 2 gives you all the frequencies of the LIRR, letting you tune in to the action all the way from Penn Station to Montauk.

If you'd like a faster trip than the railroad but don't want to get involved with traffic (especially on weekends), leave the driving to the Hampton Jitney, a fleet of comfortable buses that will pick you up in midtown Manhattan — or near selected airports (such as LaGuardia). The Jitney offers amenities such as beverages and reclining seats with reading lights. Call 516-283-4600 for information. Its toll-free number is 800-936-0440 (from area codes 212, 718, 914, and 201). If you're taking the Jitney, bring your portable scanner and monitor 152.435 and 157.695, and then search between 935 and 939 MHz.

### ■ When Do I Start?

When should you visit Montauk? That's up to you: Montauk is a year-round resort, even though "the season" runs from Memorial Day to Labor Day. During this time, prices are higher, the crowds are bigger, and the traffic is heavier. Hey, that's why some people go to Montauk — to be where the action is!

However, if you like a better selection of accommodations, no lines for restaurants, plenty of parking spaces, and lower prices, consider autumn and spring as two excellent times to monitor Montauk. These two seasons are beautiful on the "East End." You'll still be able to take in all the attractions of Montauk, and you'll do it at a more comfortable pace. No matter when you visit Montauk, you'll enjoy it.

**Table 2**

#### Long Island Railroad Frequencies (MHz)

160.38	Train channel one
161.445	Train channel two (dispatcher)
161.265	Train channel three (yardmaster)
161.535	Train channel four (car inspectors)
161.385	Maintenance of way
160.385	Maintenance of way
160.785	Maintenance of way
161.455	Police (HQ and system-wide)
161.49	Police repeater output - NY terminals
160.605	Police car-to-car
452.9125	Police mobile repeaters
452.7625	Police hand-helds
452.86325	Police hand-helds
154.115	Train repeater, Penn Station (output is on 160.38)



*The docks at Montauk.*



# The ZEIT by ARCRON RADIO-CONTROLLED CLOCK

- All World Time Zones with Precise Time
- Tell Time by the Atomic Clock that governs time for radio stations and space flights
- Sets Self By The NIST Radio Waves - WWVB Signal

Time, Hours, Minutes, Seconds	US and World Time
Reception/Signal Strength	All World Time Zones
Date or 2nd Time Zone	ARC Program Symbol
BackLight Dial for Night	Dual Alarm Function



## Keeping Exact Time HASN'T BEEN EASIER!!

*You'll never have to set the time again. Automatically sets accurate time, date and adjusts for the start and end of daylight savings time*

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• Receives Radio Signal from US Atomic Clock</li> <li>• Superior Signal Sensitivity (Below 20µV/m)</li> <li>• Continuous Oscillator Calibration</li> <li>• Internal Quartz Oscillator</li> <li>• Integrated Internal Ferrite Omnidirectional Antenna</li> </ul> | <ul style="list-style-type: none"> <li>• Battery Operated with Low Battery Indicator</li> <li>• High Tech Design</li> <li>• Warranted</li> <li>• 2.60" x 5.30" x 4.45"</li> </ul> |
|--|---|

**Only \$129<sup>95</sup>**  
+ S&H \$4.95

M/C • VISA • DISCOVER • AMEX  
2ND DAY DELIVERY AVAILABLE

**ORDER TODAY — TOLL FREE 24 HOURS**

**1-800-985-TIME (8463)**

Call or write for free brochures

Arcron-Zeit Co., 1010 Jorie #324, Oak Brook, IL 60521; Call 630-472-999 International; Fax 630-575-0220 or [www.arctime.com](http://www.arctime.com)

## EUROPE'S BEST SELLING INDOOR SCANNER ANTENNA NOW AVAILABLE DIRECT FROM U.K. MANUFACTURERS

### SKY SCAN

#### Desk Top Antenna Model Desk 1300

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>✓ Built and designed for use with scanners.</li> <li>✓ Total height : 36 in. / 9 in. at widest point.</li> <li>✓ Coverage: 25 to 1300 MHz.</li> </ul> | <ul style="list-style-type: none"> <li>✓ Comes complete with 4 metres of RG58 coax cable and BNC connector fitted.</li> <li>✓ Ideal indoor -- high performance antenna and can also be used as a car antenna when your car is static.</li> </ul> |
|--|--|

**REMEMBER -- YOUR SCANNER IS ONLY AS GOOD  
AS YOUR ANTENNA SYSTEM!**

How to order: Visa/Access

Phone: 011 44 1562 730672  
FAX: 011 44 1562 731002

**S.R.P. TRADING**  
Unit 33 Nash Works  
Nash Lane  
Belbroughton  
West Midlands DY9 9TD  
England

**\$99.95**


Total price delivered to you.  
Please allow 10 days for delivery.





# Cool Running at Charlotte

*More Cool  
Racing Freqs*



NASCAR

**By Mike Bryson**

**H**oly Hot Wheels! The month of May is already here and I'm still not used to writing 1997 on my checks yet! Speaking of checks, I just wrote a doozy to Charlotte Motor Speedway. I am going to take my trusty scanner and head down to the "Mecca of Motorsports." Charlotte Motor Speedway in Charlotte, North Carolina has one of the coolest NASCAR Winston Cup races of the summer on the 25th of this month.

What makes it so cool? It could be the fact that the Speedway is host to the Coca-Cola 600, one of the biggest races of the season. This race is considered one of the "Big Four" races in the NASCAR million dollar sweep. If a Winston Cup driver wins three of the "Big Four" races, he collects a "cool" million bucks.

Another cool fact about this race is that it starts later in the evening and finishes in the dark! Yep, this track has an elaborate lighting system that allows a spectator to see the race after dark. In fact, it's the only track on the Winston Cup circuit that continues the races after the sun goes down. In order to keep the lights from blinding the drivers, there is an ingenious lighting system that uses mirrors and ground lighting to illuminate the track without the glare normally associated with outside overhead lighting. It's sort of like a "backlit racetrack." It also makes for great pictures. Given the fact that Charlotte can be pretty darn hot this time of year, this cool idea makes it a cool race indeed.

I tried to locate frequencies for the track via Internet but didn't discover anything unexpected or unusual. I did, however, glean some frequencies from my Grove Enterprises FCC Database. See table 1 on the following page for the Charlotte Motor Speedway frequencies. Be forewarned: a couple of these are 100 watters.

Some other frequencies of interest might be the local police, fire, and rescue frequencies. Unfortunately, since Mecklenburg County uses an analog trunked system, your ability

to monitor a specific agency will be limited (see table 2). Also, don't forget TV and radio coverage of the race—their audio may be more coherent on your scanner than the local loudspeaker. The roar of race cars has a tendency to overwhelm any public address system; add more horsepower to it and you have fried speakers.

For the scanner I plan to take a stubby UHF scanner antenna tuned to the 460 to 470 MHz range. Remember, this is the band in which almost all of the NASCAR teams transmit. You should still be able to pick up the NASCAR officials and safety crews in the 150 MHz range, just slightly attenuated. This antenna should also help you squash those irritating pager and cellular intermod monsters. (This is Charlotte, after all.) The stubby UHF antenna is easily available from Grove Enterprises for \$9.95 (just ask for ANT 18) or from any other racing scanner supplier.

## ■ Busch — a Cool Bargain

The Coca-Cola 600 is not the only race scheduled for the Charlotte Motor Speedway. On the same weekend as the 600, the NASCAR Busch Grand National Series is in town for the Charlotte 300 (May 24th). The Busch series is the division below the Winston Cup Series (NASCAR has more divisions than Motorola).

This does not make it less exciting. Chances are very good that you may see some of your favorite Winston Cup drivers banging doors with the rest of the Busch regulars. Winston Cup drivers such as Mark Martin, Dale Jarrett, Michael Waltrip, and even 1996 Winston Cup Champion Terry LaBonte have regular Busch rides. There are more. Of course Winston Cup drivers are not allowed to collect any points for the races they run, just prize money ...

Why go to a Busch Grand National event? For starters, the races are usually not as long and the cost of tickets is usually about half of a Winston Cup Event. These Grand National cars are identical in appearance (except for paint schemes) to the Winston Cup cars but the rules place greater restrictions on their engines. Horsepower is down from around 700 for Winston Cup to about 500





horsepower for the Busch cars (I could live with that). The competition level is just as intense because the rules are enforced with the same militant mindset that has made the NASCAR Winston Cup Series so successful. In short, you get a lot of "bang for your buck" (ouch).

You can find the Busch series frequencies the same way we found the Winston Cup freqs in our April feature. The Internet is the first place I look, and then I double check the frequencies with the Grove FCC Database. I found a good site for the Busch freqs at [www.northtex.com](http://www.northtex.com). See table 3 on the following page for the Busch Grand National Series frequencies. Notice that all of these

frequencies are in the 450 to 470 MHz range just like the Winston Cup freqs. Don't forget to program your scanner ahead of time!

If you can't find your way to Charlotte in May, check out some of the races and racing organizations in your area. You can snarf the team frequencies in the same manner as we did the Winston Cup and Busch freqs. We will be covering some of these in future issues of *MT*. For regional freqs wherever you go, good references are *Police Call* and *Monitor America* (both widely available from dealers, including Grove Enterprises). But to monitor some of the coolest races this month, Charlotte Motor Speedway is the place you ought to be, if you are a Racing Freq like me.

**TABLE 1: Race Track Frequencies:**

Charlotte Motor Speedway, Inc., Concord, NC	
461.9000	KD50815
463.9000	WNPE528
466.1750	KD50815
466.3500	KD50815
466.4500	KD50815
466.8000	KD50815
466.9000	KD50815
468.9000	WNPE528

Courtesy Grove FCC Database

**TABLE 2:  
Other Charlotte Area Frequencies**

154.2800	Statewide Fire Mutual Aid (153.8150 input)
155.1600	Char/Meck Ambulance Service mobile
155.1900	Charlotte law enforcement (old system)
155.2800	County Rescue/Emergency Medical Service
156.1650	Mecklenburg Co. Fire (800 MHz simulcast)
159.0900	State Bureau of Investigation
453.7000	Mecklenburg Co. law enforcement (old)

**Law Enforcement City and County Trunked System:**  
(Police, Sheriff, Fire, EMS, etc.)

851.1875, .7625, .7875, .1875
852.2375, .6625, .7125, .8625
853.0625, .0625, .1625, .3625, .4125, .6125, .6625
854.0375, .2125, .2375, .3375, .4625, .4875, .6875
856-860.2375, 855-860.4875, 855-860.7375, 856-860.7625, 855-860.9875

**Conventional channels:**

Charlotte	806.0125, 810.4625, 851.0125, 855.4625, 855.9625
Mecklenburg Co.	806.5375, 851.5375
Douglas Municipal	809.9875, 810.2125, 810.7125, 854.9875, 855.2125, 855.7125

(Sources: *Monitor America*, *Police Call*, *Grove FCC Database*)

**TABLE 3: 1997 NASCAR BUSCH SERIES FREQUENCIES**

# Driver	Primary	2nd	3rd	# Driver	Primary	2nd	3rd	# Driver	Primary	2nd	3rd
1 Hermie Sadler	461.0875	463.7875		36 Todd Bodine	461.3750	461.1250	468.4875	74 Randy LaJoie	460.5625		
2 Ricky Craven	466.9750	463.8875	464.1125	37 M. Green	469.9375	468.3375	461.4375	75 Brad Teague	462.0750	467.3350	467.3750
3 Steve Park	466.9250	466.4250		38 Elton Sawyer	467.9375	468.9375		77 Dennis Setzer	468.7375		
4 Jeff Pruvis	463.5875	464.3000	464.3875	39 Tim Bender	469.3625			81 J. Neal	466.2625		
5 Terry Labonte	460.3125	461.2375		40 Tim Fedewa	469.7625	462.0875		84 C. Chaffin	467.2625		
6 Tommy Houston	464.5750	464.5250	463.6625	43 Rodney Combs	466.6125			85 Shane Hall	465.1125		
7 D. Johnson	461.8375	463.3125		41 J. McCarthy	467.7625			87 Joe Nemechek	460.2375	468.8375	468.2375
8 Kenny Wallace	459.6875	459.2875	469.2875	43 Rodney Combs	466.6125	461.6250		88 Dennis Setzer	468.4625	467.1250	
10 Phil Parsons	466.7875	461.9875		44 Bobby Labonte	469.3625	468.6375	461.2375	89 John Nemechek	464.7625	460.2375	
11 J. Foster	464.2500	466.2750		45 Rich Bickle	463.7375			90 Mike Wallace	461.5375	461.5875	
12 Michael Waltrip	463.2375	461.4875		46 Larry Pearson	468.2875			92 Sterling Marlin	460.2125		
14 Patty Moise	466.3875	461.7875		47 Jeff Fuller	469.4625	463.8875		94 Ron Barfield	469.8750	468.6750	
15 Tony Stewart	461.8875	461.7875	468.0875	48 Randy Porter	460.5875			96 Stevie Reeves	461.1750		
16 D. Sage	467.2875	460.2125	467.8500	49 Kyle Petty	461.7125	461.0000		97 M. Ward	465.9000	465.6375	
17 Robbie Reiser	462.4750			50 Greg Sacks	467.1375	469.5500		98 Jeremy Mayfield	462.0875	460.5875	466.4875
18 Tim Bender	468.3375			51 Jim Bown	461.6625	463.1875		99 Glenn Allen, Jr.	459.1875	467.9875	464.3250
20 Jimmy Spencer	469.8375	461.9875	466.9875	52 Andy Hillenburg	467.6875			00 Buckshot Jones	464.6250		
21 L.W. Miller	468.3750			53 G. Clark	463.3375			02 M. Rich	465.9875		
22 Ward Burton	462.3875	462.8375		55 Bobby Dotter	462.5625	459.8375		03 D. Bonnett	462.5125	465.4375	
22 Sterling Marlin	462.3875			56 R. Thiel	461.8000			09 Peter Gibbons	462.6250		
23 Chad Little	463.4250			57 Jason Keller	460.1125	458.2750	457.1125				
24 M. Harmon	461.8125			59 Jerry Nadeau	464.2125			NASCAR 1	469.5000	NASCAR 6	463.8500
25 Johnny Rumbley	465.2625	465.1625	459.2375	60 Mark Martin	460.9500			NASCAR 2	464.5000	NASCAR 7	461.2000
26 Jeff Green	462.4625	463.7625	462.1625	63 Tracy Leslie	468.3125	468.5375	457.2625	NASCAR 3	464.9000	NASCAR 8	463.6250
27 Roy Payne	468.8875	467.8375	469.4625	64 Dick Trickle	467.1875	468.0875	462.5625	NASCAR 4	464.7750	Scoring	468.2500
28 Hut Stricklin	461.3125			66 Nathan Buttke	463.9625			NASCAR 5	465.0250	Inspectors	468.8500
29 Elliott Sadler	467.9625	466.4625	463.4000	67 Tom Peck	461.9625						
32 Dale Jarrett	468.5250	463.7375	461.4375	70 Dale Fischlein	461.4375	466.6750		Motor Racing Network		454.0000	
33 Tim Fedewa	468.1250			71 Kevin LePage	469.4625	468.2875		Sports Network ESPN		450.3500	
34 Mike McLaughlin	462.5375	469.6750		72 Mike Dillon	469.8125						
35 Mike Laughlin	468.4875			73 J. Visconti	466.0375	466.5750	463.5125				

Courtesy of Northtex Motorsports, <http://www.northtex.com>. Reprinted by permission.



# Local Service Scramble

It is often said that history repeats itself. In 1903 more than half of all cities and towns in the United States were served by at least two telephone companies, each offering local service. Now, due to the Telecommunications Act of 1996, competition in the local telephone service market will no longer be a thing of the past. The difference this time will be that much of the service will probably be wireless.

## Rural Radiotelephone Service

In some extremely remote rural areas home telephone service is already wireless, and has been for more than a quarter of century. Where it is not economically feasible for the local telephone company to run wire for basic service they have often chosen to operate what the FCC calls Rural Radiotelephone Service.

Customers use paired channels in the 150 MHz and 450 MHz bands with equipment and quality almost identical to the pre-cellular mobile telephone service. In fact the VHF and UHF allocations continue to be shared between rural radiotelephone service and one-way or two-way public land mobile service (the old Improved Mobile Telephone Service).

These analog channels provide a full-duplex (both parties can speak and hear at the same time) radio link for remote households to reach the public switched telephone network (PSTN). The channels are often shared by several customers, so that, just as with a party line, callers have to wait until others are finished before placing a call. When a channel is available the sound quality may be poor, making conversations and modem calls difficult.

As with most technologies, cost is the driving factor. The average cost for rural telephone service exceeds \$3000 per household, while the total cost for a urban or suburban wired local loop averages between \$1200 and \$1800. In order to see what comprises these figures, let's take a look at what makes up a local loop.

## Some Jargon

In a traditional wired environment, the pair of wires connecting your telephones to the outside world is called a local loop. All the wires inside your house are termed "premise wiring" and connect to the "drop wire" (named from the image of dropping the wires from the telephone pole into your house) at a Network Interface Point (NIP), also known as the "demarc" or demarcation point. This point separates your responsibility from the phone company's — everything from the NIP to inside your house (the premise wiring) is *your* problem, and everything from the NIP out-

side your house is *their* problem.

A number of drop wires from your neighborhood all run to a junction box or wiring block and are combined into a distribution cable. Several distribution cables join up to form a feeder cable, which may have more than 2500 drop wires in it. This huge bundle of wires runs into your local central office, which provides your telephone service. Inside the central office, of which there are about 20,000 in the United States, is a device called a switch that directs incoming and outgoing calls to the proper place. Central offices connect to each other over interoffice trunks, which can take the form of wires, microwave links, and (more commonly now) fiber optic links.

Telephone companies that serve urban and suburban areas average over 300 subscribers per square mile, whereas rural telephone companies average less than five subscribers per square mile. The typical cost for the switch and associated equipment is between \$100 and \$200 per customer, whether urban or rural. Maintenance, planning, and other network costs can add another hundred or two (or more) to that number.

A copper telephone line in an urban or suburban area will cost the telephone company somewhere between \$500 and \$1000, depending on how densely the population is situated. In rural areas this is much higher, since distances are greater and the high labor and material costs are spread across a much smaller number of users. In the interest of providing telephone service to everyone (often referred to as "universal service") the government provides subsidies to rural telephone companies to keep the rates they charge their customers affordable.

The bottom line here is that unless suppliers can provide local loop service for less than \$1200 to \$1800 per user there will be little interest from the telephone industry. Before 1996 there was another reason for little interest in domestic wireless loop technology — regulatory history.

## Some Background

The Modified Final Judgment (MFJ) that broke up the monolithic Bell System in 1984 created rules that have just recently changed under the Telecommunications Act. The MFJ split the nation into more than 160 local access and transport areas (LATAs) and allocated the former Bell System local telephone service to seven new Regional Bell Holding Companies (RBOCs). These holding companies were built up out of smaller organizations called Bell Operating Companies, who actually provided local telephone service.


In exchange for the grant of local monopoly power, the RBOCs were prohibited from pro-

**RURAL RADIOTELEPHONE SERVICE**  
Transmitter Center Frequency

VHF CHANNEL PAIRS			
Base	Mobile	Base	Mobile
152.03	158.49	152.57	157.83
152.06	158.52	152.60	157.86
152.09	158.55	152.63	157.89
152.12	158.58	152.66	157.92
152.15	158.61	152.69	157.95
152.18	158.64	152.72	157.98
152.21	158.67	152.75	158.01
152.51	158.77	152.78	158.04
152.54	158.80	152.81	158.07

UHF CHANNEL PAIRS			
Base	Mobile	Base	Mobile
454.025	459.025	454.350	459.350
454.050	459.050	454.375	459.375
454.075	459.075	454.400	459.400
454.100	459.100	454.425	459.425
454.125	459.125	454.450	459.450
454.150	459.150	454.475	459.475
454.175	459.175	454.500	459.500
454.200	459.200	454.525	459.525
454.225	459.225	454.550	459.550
454.250	459.250	454.575	459.575
454.275	459.275	454.600	459.600
454.300	459.300	454.625	459.625
454.325	459.325	454.650	459.650



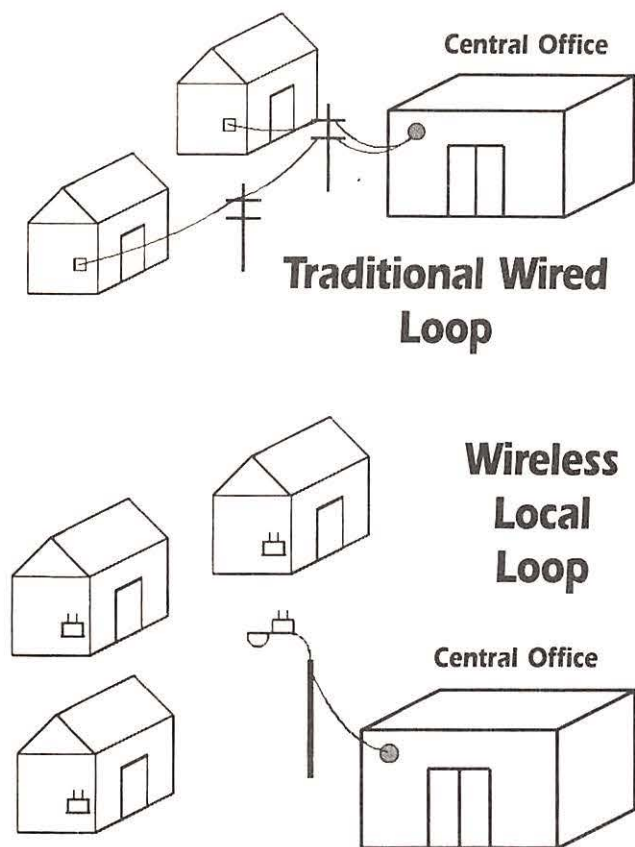

viding long distance service (among a lot of other things). Local dialtone service and connections between two points lying entirely within a single LATA were provided by a single Local Exchange Carrier (LEC). These RBOCs plus more than 1300 independent telephone companies still provide more than 95% of the nation's local phone service.

However, under the MFJ, almost all service between two points that were not within the same LATA had to be provided by one of many Inter-Exchange Carriers (IXCs), or long distance companies, even if the two LATAs were both within the service area of the LEC. Long distance providers became fiercely competitive and drove prices down, but LECs remained the only source for local phone service.

What the Telecommunications Act did is open up the \$100 billion local telephone service business to competition. Small companies and RBOCs from other areas are now allowed to compete with the incumbent LECs, who must share their networks with competitors, including everything from facilities to rights-of-way and telephone poles. LECs, in exchange, can now provide long distance service outside of their service area, and will be allowed to do so within their area after proving how well they've allowed access to competitors. It's not much of an exaggeration to say that everyone will be able to compete everywhere.

Wireless loop technology has been sold in developing countries for some time now, allowing the government (in most countries the telephone system is controlled by the government) to quickly provide phone service in selected areas without the expense and other difficulties that come with running wires to each customer. Motorola, Ericsson, and Hughes Network Systems, as well some smaller firms, all market fixed wireless loop products for use in undeveloped or

remote areas. Most of them are basically repackaged radio equipment with a single analog telephone line interface operating over traditionally mobile frequencies.

### ■ Wireless Loop Redux

A recent announcement by AT&T Wireless Services and AT&T Laboratories takes local loop bypass to the next level. Field tests will begin in the Chicago area later this year of their fixed wireless loop technology operating at PCS frequencies. Customers will continue to use the same wired telephones and answering machines they use now, except that instead of copper wires running out to the street, each house or small business would have a pizza box-shaped transceiver connected at the NIP. Each of these transceivers would communicate with a neighborhood antenna mounted on a light pole or other structure.

The antenna, which could serve upwards of 2,000 homes, would be directly connected to AT&T digital switches, completely bypassing the underground or overhead wires that make up most existing telephone service.

This is more than just a replacement for standard analog telephone service. The transceivers will initially provide a 128 kilobits per second (kbps) digital connection, comparable to Integrated Services Digital Network (ISDN) services being offered by some LECs. Customers will have the flexibility to use that connection as they see fit on an on-demand basis. For instance, the customer could connect to the Internet using the full 128 kbps capacity, then downshift to 64 kbps in order to make a voice call, then resume web surfing at 128 kbps or terminate the data connection and set up a second voice call while the first one is still open.

Computer connections will not be hampered by the current speed limitations of traditional modems since the data will be digital from end to end without ever being converted to analog. If 128 kbps isn't fast enough, AT&T promises that the transceivers will be software-upgradable (no hardware changes necessary) for even higher bandwidth. AT&T claims their internal cost will be less than \$1,200 per household, which puts them beneath the cost threshold discussed above.

For an additional \$300, customers will be able to purchase a "personal base station," which will allow them to use their digital cellular or PCS handset as a cordless phone while at home. Calls made using the personal base station will be charged at the lower wired telephone rates instead of the traditional per-minute air-time rates.

Will it come to your neighborhood? AT&T says it depends on the outcome of the Chicago trials, but they've spent a lot of money to put this kind of technology in the hands of consumers. Their transceivers have been designed operate in a 10 MHz block of broadband PCS spectrum, and in the recent FCC auctions AT&T won 21 licenses in the 30-MHz A and B blocks and 222 licenses in the 10-MHz D, E, and F blocks.

This gives them access to 93% of the U.S. population, but with up to half a dozen wireless providers competing in large markets, several wireless loop solutions may be available. Other companies, including Siemens Stromberg-Carlson, Lucent Technologies, and Motorola have expressed interest in manufacturing wireless local exchange equipment, so this may become a large market indeed.

If all this telephone jargon has you confused or you're looking for more information, check the PCS Front Line homepage at <http://www.grove.net/~dan>. Comments, criticisms, and questions are always welcome at [dan@decode.com](mailto:dan@decode.com). Happy monitoring!



## In Our Dreams: Things Scanner Listeners Wish For

Over the last few months we've asked our scanner column readers to tell us what features they would most like to see on a new scanner. We also asked you what scanner is your favorite of all time. Below are some of the responses to these questions, along with comments by this editor.

The mail and e-mail of late has been pouring in like never before. This is a hopeful sign that interest in the hobby is back on the upswing. Let's continue the momentum! Please keep the mail coming on these subjects. Who knows? You may just help influence a scanner manufacturer in the design of a new radio. (Note: please use the Scanmaster@aol.com address above.)

✉ Roy Boland sent us two e-mails with his thoughts:


"Scanner features I'd like to see:

1. Trunking System-compatible scanner. The BC235 & BC895 are probably only the beginning. Multiple system capability will be a must!
2. APCO Project 25-compatible scanners, should this indeed become the national digital standard.
3. Channel shown by name, not simply frequency. Some of the newer ham stuff does this.
4. CTCSS & DCS operation. My BC760 features this and I love it." (Editor's note: Actually, Roy, the Bearcat 760 handles only CTCSS, unless you've got a unique mod for the radio. If so, we would love to hear about it.)

"My favorite scanner was the BC250. I really liked the COUNT feature which recorded the number of 'hits' (unfortunately only up to 50) on the frequencies entered. I also liked the built-in tape recorder activator. I'd really like to see these features on base/mobile radios of the future.

"My current favorite base/mobile is the BC760. I use the CTCSS feature almost all the time, as I live in the Chicago area. My favorite handheld, bar none, is the BC3000. The 800 MHz/military aircraft/federal government coverage, combined with the scanning speed, can't be beat! I wish my ham HT had this kind of coverage/scan speed. Now if that darn DATA Skip feature only worked on trunked systems..." (Editor's note: As we've mentioned in previous issues, the G/WIZ modification will eliminate the beeps, buzzing, and jingles of Ericsson/GE analog trunked radio systems.)

In a later posting Mr. Boland adds, "I did leave one thing out...New scanners will have to be much more computer friendly, i.e. they'll have to be ready to plug into the things! This is particularly true if scanner makers intend to stop the flow of former and would-be radio hobbyists from fleeing to the Internet. I'd also like to see better shielding."

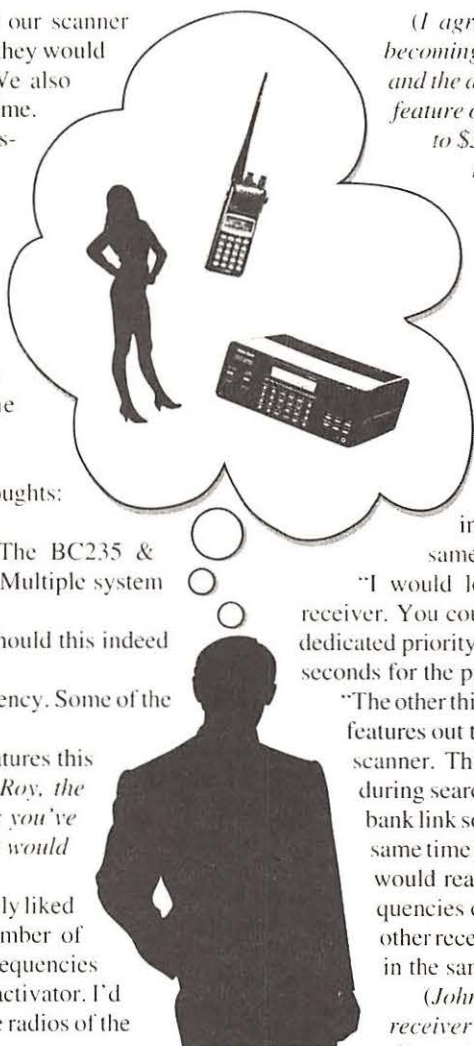

(I agree with you wholeheartedly, Roy. People are becoming more interested in computers and the Internet and the ability to work with computers will be a necessary feature of almost any police scanner priced over \$250.00 to \$300.00. And this price will eventually drop. Also, regarding shielding, see our discussion below about the RELM radio.)

✉ John Comstock chips in with a very interesting angle on a new scanner feature:

"I work for a television station as a news photographer, and I have several scanners in my news car. That way, while the police are talking on one, I don't miss fire dispatches on another. But when I have to step out of the vehicle, I'm back to one 'scanner.' My choice: an Alinco DJ-580T! My reason is that it has two receivers in it, so I can still monitor two transmissions at the same time.

"I would love to see a handheld scanner with an extra receiver. You could either use it to scan two scan lists, or have a dedicated priority that was a true priority; i.e. it wouldn't take two seconds for the priority function to check for transmissions.

"The other thing that I wanted to mention: there are a lot of great features out there, but they usually don't show up in the same scanner. Things like: count on search frequencies, lockout during search for birdies or other known frequencies, search bank link so you could search several frequency ranges at the same time (by the way, that's where a dual-channel receiver would really come in handy—you could scan known frequencies on one receiver while searching for others on the other receiver.) I realize all the great features don't show up in the same scanner because of cost, but we can wish!"

(John, this is an idea whose time has come. Dual-receiver technology has already been brought up for discussion at certain manufacturers.)

✉ Let's "lock-in" to what Maury Midlo was kind enough to add:

"I'd like to have a temporary lockout feature that would let me skip noisy-but-unused channels for the duration of any one scanning session. Ideally, the channels would return to active status the next time the receiver was turned (off and) on. This would eliminate the need to permanently change the noisy channels' status to 'Skip' or 'Lockout' and eliminate the need to make a paper record of the channel in that status.

"I find that otherwise-active channels will sometimes have temporary 'unmodulated carrier,' 'open mike,' or other 'no voice' conditions that interrupt the scan. A temporary lockout would skip those channels and allow uninterrupted scanning of the other channels in that bank (sometimes few in number). I've had an ICOM



R710 for the past several years, and it is superb!"

*Maury, I also use an R7100 and have loved it since the day I took it out of the box. And I thought the R7000 was a great radio! Hopefully, one day, I'll lay my hands on an 8500.)*

Anyway, the temporary lockout feature was another idea that was discussed in manufacturing circles. The problem, though, was determining how long to keep the channel locked-out. Meanwhile, many scanners have a "Lockout Review" mode which allows for an easy check of which channels are locked-out. We still believe it's a valuable idea worth re-considering. Many people find that they enter an area, either by car or by foot, where intermod kills a few channels on a temporary basis. You want to lock these channels out for that particular period you're in this RF saturated area, but you want the channels back for normal scanning later. Some very good thoughts, Maury. Thanks.

☛ One reader wrote to us with the following take: "My favorite scanner so far is the Radio Shack PRO-2006. It still seems to outperform even the newer RS models in sensitivity and intermod rejection. My favorite feature is the ability to select NFM, WFM, and AM. The built-in attenuator assists in limiting intermod in my area (L.A./Orange County).

"As far as what I consider missing features would be a variable tuning dial, an IF bandpass switch to allow reception of weather satellite data, a signal level meter, and tone squelch capabilities.

"My first scanner was a Regency MR-10 VHF model that got me started in the hobby. My next unit was a Bearcat 220, which I still use in the mobile. It needs some alignment, and possibly some work on the RF front end. I am attempting to locate a service manual for this unit so I can bring it back to original performance specs. I recently replaced the keyboard on the unit, and one of the voltage regulator pass transistors. I hope you get a good response to your survey this time around!"


*(I wrote this person back asking if he knew where I could get my 2006 tweaked-up. My 2006 has always been desperately lacking in sensitivity, especially when compared with both Uniden and ICOM scanners. We've heard too many good things about the 2006 to think anything other than the fact that this radio needs an alignment, if not some new components. Below is the anonymous e-mailer's response to my query.)*

"Seems that the sensitivity of the 2006 varied with each unit. I have heard several owners say the same thing, also I have heard others say the opposite!

"Possibly the problem was due to alignment or parts lot quality control at the factory. I imagine that some careful alignment would help clear the problem. I have heard some tweaks to the 2006 and other scanners that involve the installation of better semiconductors, such as precision GASFETs in the front end, and the addition of crystal filters in the IF stages.

"About 10 years ago, I worked on a project in the aerospace industry that contained a Watkins Johnson wideband ESM receiver that covered 30 MHz to 2 GHz. I was able to play with this receiver during long breaks while testing the system in the middle of the Nevada desert. It out-performed any scanner I have played with by a factor of 10! The scanning speed was better than 150 channels per second. Reception of the NWS receiver was almost full-quieting at a distance of over 90 miles from Las Vegas. I was unable to hear anything on my Bearcat 220 connected to the same antenna system at the same location!

"Most of the VHF/UHF comm links used corner reflector antenna

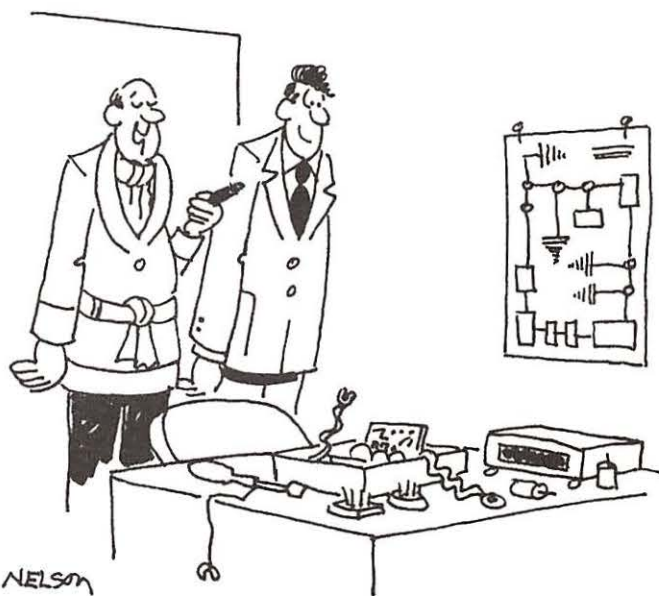

"IT WAS A HOBBY UP TILL I SOLD ONE OF MY LITTLE DISCOVERIES FOR A TON OF MONEY."

systems to keep the signals from straying off the test range towards the rear of the antenna. F/B ratios of these antennas were around 50 dB with a gain of around 12 dB! I was also amazed at the performance of the Sunair GSB-900 HF transceiver that was part of the same project. I was able to do some nice DX contacts during long breaks. I was able to purchase one of the Sunair units from the distributor at a fraction of the cost that the military paid. I have been using it since as my HF ham station.

"Presently I am employed as a system engineer by a local large CATV company. We have recently begun large scale testing and deployment of high-speed internet access, PCS, landline telephone, digital compression (6 to 1), and SONET/ATM technology."

☛ An RDW writes: "With regard to your question about scanner features, I have a feature that I would like to see included in scanners. Both the Motorola MaxTrac transceiver and the Bendix/King portable that I was issued at one time had extremely fast (250ms) priority channel sampling rates. Briefly sampling the priority channel four times per second, the interruption of the audio during sampling was barely noticeable and traffic on the priority channel was detected virtually instantaneously.

"Bearing in mind that my most recently purchased scanner is a BC205XLT and that my others were purchased when the dinosaurs roamed the earth, I don't know whether or not the newest offerings include this feature. I have reserved a BC895XLT 'Trunk Tracker' from Grove so I guess sometime before Christmas, I'll find out. The Motorola also had a two-level priority feature much like the system used on the 205XLT that I really liked.

"My favorite scanner was a Regency HX1000 portable. I bought it on impulse at a railroad hobby shop many years ago to replace my aging Bearcat 100. The Regency was encased in one of their marine radio cases. It had incredible sensitivity and intermod rejection.



superb audio, a BNC antenna connector, and a somewhat inaccurate clock display that was enabled by depressing the push-to-talk switch. The only drawback was that the AC adapter/charger was wired conversely from my other scanners and I blew it up with reverse polarity once and had it fixed and then I did it a second time and decided to order a portable with 800 MHz capability.

"The Uniden 'Trunk Tracker' sounds almost too good to be true, and although the only public safety agency in my immediate area that is trunked at the moment is the Oklahoma Highway Patrol, I was due for a new scanner, so why not?"

✂ Chris Arndt, KD6DSI, contributes some interesting scanner thoughts and experiences:

"Well, let's see. I guess my favorite scanners were the pair of Regency ACT R 10s (?), and my Bearcat 250. The Regencies were my first ones, and the first that I tinkered with. I sped up the scan rate quite a bit on those. They, a Motorola CB, and my under-dash car stereo at the time were all equipped with Radio Shack slide mounts top and bottom (except for one scanner). When I locked up my car for the night, I slid everything together in a stack. On top, I had a car half-mount with a handle. All of the power connections were looped through, and in the house I had a power supply that would run the stack. I liked the 250 because it was programmable, and had an auxiliary connection that could be used to turn on a tape recorder when a channel was active. I used that a lot.

"Hard to say what feature I like the most. I'm really partial to the combination of an Optoelectronics Scout and a programmable radio like an ICOM R7100. I don't use it much, but it's fun when we go on a trip to hear what's going on around us. A couple of things I would like to see: I used the channel activity counter on the BC 250 a lot to see if a channel was active; I also like having lots of channels, but the banks these days are too big. Instead of, say, 400 channels in 10 banks of 40, I'd rather have 40 banks of 10, or 20 of 20. When I want to channelize frequencies, I'd like more flexibility."

*(I know, 10 banks of whatever is popular because there are 10 digits on a keypad, but really, I don't want 100 channels in 10 banks on a 1000 channel scanner. Surely some manufacturer can figure out a clever way to make more banks of fewer channels.)*


We found this mail fascinating and we hope to print more in upcoming issues.

## ■ Race Scanning Preview

Recently this editor had the opportunity to learn a bit about the race scanning business. Mike Raley, president of the Frequency Fan Club, perhaps the nation's largest and most well-respected organization dedicated to race scanning, was kind enough to spend some time with me prior to the Primestar 500 Nascar race in Hampton, Georgia. (You can reach Mike and his organization at 1-800-RACE-FAN.)

Hampton, adjacent to Griffin, Georgia, is some 30 miles south of Atlanta. This is important to race scanning buffs for one very important reason: The intermod coming out of Atlanta, as well as the Air Route Traffic Control Center and AT&T towers across the street from the track, is unbearable. There you are, trying to listen as Dale Earnhardt evades an accident on Turn Three, and all of a sudden you're blasted with "Beeeeeeep, boooooooop."


As a result of this interference, Frequency Fan Club, and some of the other dealers at the tracks, are now pushing the RELM handheld scanner. As many of you know, the RELM 200-channel portable is CTCSS and DCS capable.

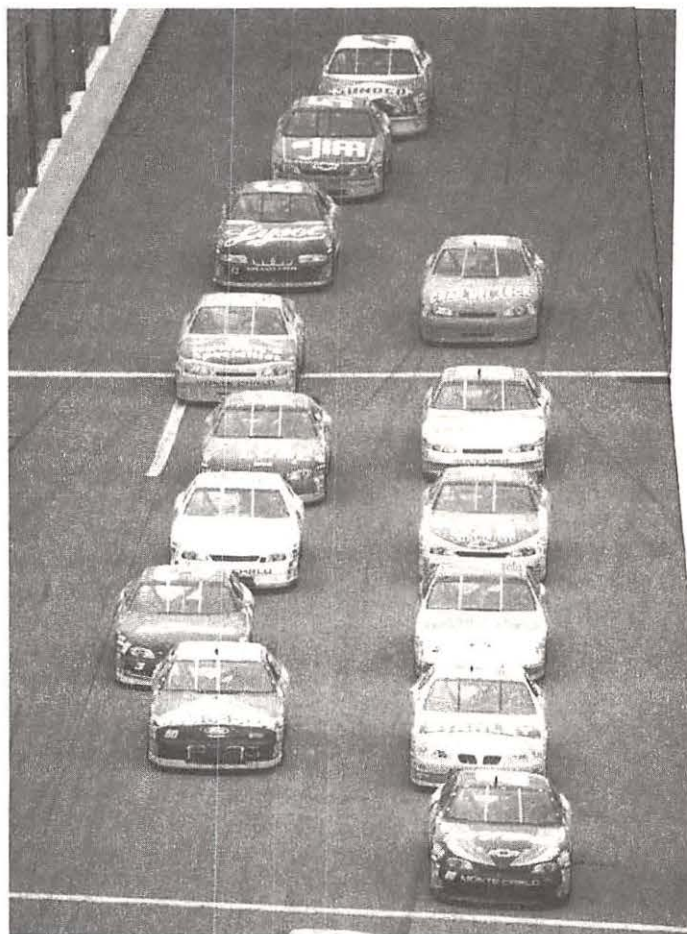

Programming in sub-audible tones along with frequencies goes a long way to cleaning up what you hear. The RELM scanner, from what we're told, also has excellent shielding. If you remove the antenna from the RELM, you receive nothing. Try that with some other scanners!

The concern that NASCAR and other circuits have, though, is that if the tone information is widely disseminated, some unbalanced racing fan (and there are a few) may buy himself a two-way radio, program in the tone, key up at the track and tell Mr. Earnhardt a thing or two about the right way to drive. Once that happens, it's all over for the race scanning business. Everyone will go scrambled.

There's a lot more to learn and discuss about monitoring at the track. We'll discuss it further in upcoming issues.



America's #1 Scanning Magazine is

## National Scanning Report

But don't take our word for it. Check it out yourself. \$3.00 cash will get you a sample copy rushed to you by First Class Mail. Or subscribe for just \$19.90 and you'll get a free custom frequency print-out for your county.

1-800-423-1331

P.O. Box 360,  
Wagontown, PA  
19376



# Bearcat intercepts trunked radio

## COMMUNICATIONS ELECTRONICS INC.

### New...radios available from CEI

For over 28 years, thousands of radio operators have depended on police radio scanners, digital voice loggers, Ham/CB/GMRS transceivers, weather forecasting equipment and more from Communications Electronics. To get your free fax catalog, call 313-663-8888 from the telephone handset on your fax machine and follow recorded voice prompts.

## Trunk Tracking

Conventional scanning is a simple concept. You enter a radio frequency into your scanner that is used by someone you want to monitor. For example, the police may broadcast on 155.370 MHz, the fire department on 154.250 MHz, emergency management on 158.760 MHz, etc. So when your scanner stopped on a frequency, you usually knew who it was and, more importantly, you could stop on the frequency and listen to an entire conversation. This type of conventional scanning was easy and fun.

As the demand for public communications increased, many public radio users didn't have enough frequencies to meet their needs, which created a serious problem. Trunking systems solved this problem. Since very few, if any, radio users really broadcast on their frequencies all the time, it was possible to use available public service bands much more efficiently.

In a trunked radio system, which contains between 3 and 29 different frequencies, radio users are assigned to talk groups, each with a specific ID number. When someone in a talk group uses their radio, subaudible identification information is broadcast along with each transmission. The trunking system computer uses this subaudible information to temporarily assign each radio in a talk group to an available frequency. If the group using a frequency stops broadcasting or pauses between replies for a few seconds, they are removed from the frequency so another talk group can use it.

Sharing the available public service frequencies allowed cities, counties, states and other agencies to accommodate hundreds of users with relatively few frequencies. On the other hand, following a conversation on a trunked system became difficult if not impossible because if the conversation you were listening to stopped transmitting long enough, it could be assigned a completely different frequency in the trunking system. This type of scanning was difficult and frustrating.

The Bearcat 235XLT TrunkTracker available from Communications Electronics changes all that. Not only does the Bearcat 235XLT search frequencies like conventional scanners, it can also follow the users of a trunked radio system. Once you know a talk group's ID, you won't miss any of the action. Order today. Call 1-800-USA-SCAN.

### Bearcat® 235XLT-A TrunkTracker

Mfg. suggested list price \$429.95/CEI price \$269.95  
Allow 30-90 days for delivery after receipt of order due to the high demand for this product. Call 1-800-USA-SCAN to order.  
300 Channels • 10 banks • Trunk Scan and Scan Lists  
Trunk Lockout • Trunk Delay • Extra battery & charger  
10 Priority Channels • Programmed Service Search  
Size: 2-1/2" Wide x 1-3/4" Deep x 6" High

Frequency Coverage: 29.000-54.000 MHz, 108-174 MHz, 406-512 MHz, 806-823.995 MHz, 849.0125-868.995 MHz, 894.0125-956.000 MHz.

The Bearcat TrunkTracker BC235XLT is the world's first scanner capable of tracking a selected radio transmission as it moves across a trunked radio system. Now it's easy to monitor fleets and subfrequencies in analog trunked radio systems. The BC235XLT can also work as a conventional scanner. This 300-channel, programmable handheld scanner provides scanner users with uninterrupted monitoring capabilities of Type I, II, III and hybrid trunking systems. One of the biggest obstacles in the scanner has been the increasing use of trunking radio systems in business and public service agencies throughout the United States and Canada. This makes it nearly impossible to track a conversation as it moves within a trunk system from frequency to frequency. According to Ken Ascher, WB8LIT, Chairman & CEO of Communications Electronics, "The Bearcat 235XLT is a revolutionary breakthrough in scanner technology. Now it's easy to continuously monitor conversations even though the message is switching frequencies." The BC235XLT comes with AC adapter, CRX120 battery charger, two rechargeable long life Ni-cad battery packs, belt clip, flexible rubber antenna, earphone, owner's manual and one year limited Uniden warranty. Not compatible with ESAS, EDACS and LTR systems. Call 1-800-USA-SCAN to order now.



### Bearcat® 9000XLT-A Radio Scanner

Mfg. suggested list price \$769.95/Special \$344.95  
500 Channels • 20 banks • Alpha numeric display  
Size: 10-1/2" Wide x 7-1/2" Deep x 3-3/8" High

Frequency Coverage: 25.000-549.995 MHz, 760.000-823.995 MHz, 849.0125-868.995 MHz, 894.0125-1,300.000 MHz.


The Bearcat 9000XLT is superb for intercepting communications transmissions with features like TurboSearch™ to search VHF channels at 300 steps per second. This base and mobile scanner is also ideal for intelligence professionals because it has a selectable attenuator to help eliminate annoying intermodulation from adjacent frequencies in highly populated areas and selectable AM, Wide FM and Narrow FM modes that allow you to change the default receiving mode of the BC9000XLT. Other features include Auto Store - Automatically stores all active frequencies within the specified bank(s). Auto Recording - This feature lets you record channel activity from the scanner onto a tape recorder. Hi-Cut filter to help eliminate unwanted static noise. You can even get an optional CTCSS Tone Board (Continuous Tone Control Squelch System) which allows the squelch to be broken during scanning only when a correct CTCSS tone is received. For maximum scanning enjoyment, order the following optional accessories: PS001 Cigarette lighter power cord for temporary operation from your vehicle's cigarette lighter \$14.95; PS002 DC power cord - enables permanent operation from your vehicle's fuse box \$14.95; MB001 Mobile mounting bracket \$14.95; BC005 CTCSS Tone Board \$54.95; EX711 External speaker with mounting bracket & 10 feet of cable with plug attached \$19.95. The BC9000XLT comes with AC adapter, telescopic antenna, owner's manual and one year limited Uniden warranty.

Size: 2-3/4" Wide x 1-1/2" Deep x 7-3/8" High  
Frequency Coverage: 25.000-549.995 MHz, 760.000-823.995 MHz, 849.0125-868.995 MHz, 894.0125-1,300.000 MHz.

The Bearcat 3000XLT is the ideal handheld radio scanner for communications professionals. This handheld scanner scans at 100 channels per second and searches at a rate up to 300 steps per second. A selectable attenuator eliminates annoying intermodulation from adjacent frequencies in highly populated areas. Selectable AM, Wide FM and Narrow FM modes allow you to change the default receiving mode of the BC3000XLT. For maximum scanning pleasure, order the following optional accessories: UA502 Cigarette lighter power cord for temporary operation from your vehicle's cigarette lighter \$14.95; LC3000 Deluxe swivel leather carrying case \$34.95; BP2500 rechargeable nickel-cadmium battery pack for up to five hours of dependable use \$29.95; ANTMBCB Magnetic mount scanner antenna with BNC jack and 12 feet of cable \$29.95. ANTSGBNC Glass mount scanner antenna with BNC cable \$29.95. The BC3000XLT comes with AC adapter, belt clip, flexible rubber antenna, earphone, owner's manual and one year limited Uniden warranty. Order today.

Size: 2-3/4" Wide x 1-1/2" Deep x 7-3/8" High  
Frequency Coverage: 25.000-549.995 MHz, 760.000-823.995 MHz, 849.0125-868.995 MHz, 894.0125-1,300.000 MHz.

## Shortwave Radio

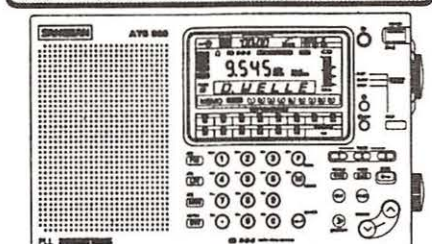

### Sangean ATS909-A Shortwave Receiver

Mfg. suggested list price \$399.95/Special \$249.95

Size: 8-1/4" Wide x 1-1/2" Deep x 5" High  
Frequency Coverage: LW: 153-513 KHz; MW: 520-1710 KHz; SW: 1711-29999 KHz; FM: 87.5-108.0 MHz.

The Sangean ATS909 features 306 memories and great reception.

## Ham/CB Radios

Have fun and use our amateur, CB, GMRS and commercial radios to keep in touch with friends. For even bigger savings, clip and use the coupon on this page. Hurry...offer ends soon.  
Ranger RC1 2970-A 100 watt 10 meter transceiver ..... \$369.95  
Ranger RC12950-A 25 watt 10 meter transceiver ..... \$219.95  
Cobra 148FTGL-A SSB CB with frequency counter ..... \$179.95  
Cobra 291TDWX-A CB with weather alert ..... \$109.95  
Cobra 2010GTWLX-A SSB CB Base (\$125.00 shipping) ..... \$299.95  
Cobra HH45WX-A Handheld CB radio with weather ..... \$89.95  
Maxon GMRS210+3-A1 GMRS transceiver/SPECIAL ..... \$161.95  
RELM RH256NB-A 25 watt VHF mobile transceiver ..... \$284.95  
RELM WHS150-A 5 watt VHF handheld transceiver ..... \$284.95  
Uniden GRANTXLA SSB CB Mobile ..... \$124.95  
Uniden PRO538W-A CB & Weather ..... \$54.95



## Radio Scanners

Monitor fire, police, weather, marine, medical, aircraft, ham and other transmissions with your radio scanner.

Bearcat 9000XLT-A base/mobile ..... \$344.95  
Bearcat 3000XLT-A handheld ..... \$329.95  
Bearcat 890XLT-A base/weather alert ..... \$209.95  
Bearcat 860XLT-A 100 channel base ..... \$139.95  
Bearcat 760XLT-A base/mobile ..... \$179.95  
Bearcat 230XLT-A handheld/SPECIAL ..... \$194.95  
Bearcat 235XLT-A TrunkTracking scanner ..... \$269.95  
Bearcat 178XLT-A base with weather alert ..... \$99.95  
Sportcat 150-A handheld with 800 MHz ..... \$144.95  
Bearcat 80XLT-A handheld with 800 MHz ..... \$129.95  
Bearcat BCT7-A information mobile ..... \$149.95  
Bearcat BCT12-A information mobile ..... \$169.95  
Relm HS200-A handheld CTCSS/800 MHz ..... \$224.95

### Bearcat® 3000XLT-A Radio Scanner

Mfg. suggested list price \$699.95/Special \$329.95

FREE - Get an extra BP2500 battery pack, a \$41.95 value when you order a Bearcat 3000XLT. Hurry offer expires 6/30/97.  
400 Channels • 20 banks • Twin Turbo Search/Scan  
Frequency Transfer • VFO Control • Automatic Store  
10 Priority Channels • Selectable Mode • Data Skip  
Frequency step resolution 5, 12.5 & 25 KHz.

Size: 2-3/4" Wide x 1-1/2" Deep x 7-3/8" High  
Frequency Coverage: 25.000-549.995 MHz, 760.000-823.995 MHz, 849.0125-868.995 MHz, 894.0125-1,300.000 MHz.

The Bearcat 3000XLT is the ideal handheld radio scanner for communications professionals. This handheld scanner scans at 100 channels per second and searches at a rate up to 300 steps per second. A selectable attenuator eliminates annoying intermodulation from adjacent frequencies in highly populated areas. Selectable AM, Wide FM and Narrow FM modes allow you to change the default receiving mode of the BC3000XLT. For maximum scanning pleasure, order the following optional accessories: UA502 Cigarette lighter power cord for temporary operation from your vehicle's cigarette lighter \$14.95; LC3000 Deluxe swivel leather carrying case \$34.95; BP2500 rechargeable nickel-cadmium battery pack for up to five hours of dependable use \$29.95; ANTMBCB Magnetic mount scanner antenna with BNC jack and 12 feet of cable \$29.95. ANTSGBNC Glass mount scanner antenna with BNC cable \$29.95. The BC3000XLT comes with AC adapter, belt clip, flexible rubber antenna, earphone, owner's manual and one year limited Uniden warranty. Order today.

## Buy with confidence

It's easy to order from us. Mail orders to: Communications Electronics Inc., P.O. Box 1045, Ann Arbor, Michigan 48106 USA. Add \$17.00 per weather station or radio product for UPS ground shipping, handling and insurance to the continental USA unless otherwise stated. Add \$12.00 shipping per antenna. For Canada, Puerto Rico, Hawaii, Alaska, Guam, P.O. Box or APO/FPO delivery, shipping charges are two times continental US rates. Michigan residents add state sales tax. No COD's. Satisfaction guaranteed or return item in unused condition in original packaging within 61 days for refund, less shipping charges. 10% surcharge for net 10 billing to qualified accounts. All sales are subject to availability, acceptance and verification. Prices, terms and specifications are subject to change without notice. We welcome your Discover, Visa, American Express or MasterCard. Call anytime 1-800-USA-SCAN or 1-800-872-7226 to order toll-free. Call 313-996-8888 if outside Canada or the USA. FAX anytime, dial 313-663-8888. Dealer and international inquiries invited. Order from Communications Electronics Inc. today. Price schedule effective April 2, 1997. All +040297AM. © 1997 Communications Electronics Inc.

For credit card orders call  
**1-800-USA-SCAN**  
Communications Electronics Inc.  
Emergency Operations Center

P.O. Box 1045, Ann Arbor, Michigan 48106-1045 U.S.A.  
For information call 313-996-8888 or FAX 313-663-8888



# Who's Where in the Shortwave Spectrum

**W**here do I find utility activity in the shortwave spectrum?" "I want to listen to aircraft and ships. Where do I find them?"

These are just a couple of the many questions I have recently received regarding where to hear various types of radio activity in the utility bands. Without specific guidance, you could wander around for quite a while until you found what you were looking for.

### ■ The Utility World Frequency Guide

Look at the shortwave spectrum as you would your mother's apple pie: She cuts it into slices, and if you talk real nice, she gives you a bigger slice. The shortwave spectrum, like that pie, is also cut into slices with the most important services getting the biggest slices of radio pie. In the radio world we call these frequency bands.

There are bands for shortwave broadcast stations, amateur radio operators, aircraft, marine communications, and much, much more. Knowing where to find your favorite listening category is crucial to being a successful utility listener.

### ■ Amateur Radio Bands

The first stop in our tour of the shortwave spectrum is the amateur radio bands. Each ham band is divided into two subbands. The first subband included those frequencies devoted primarily to Morse code (CW) and digital mode (PACTOR, AMTOR, RTTY, etc) transmissions. These subbands are (all frequencies in kHz):

1800-2000 (160 meters); 3500-3750 (80 meters); 7000-7150 (40 meters); 10100-10150 (30 meters); 14000-14150 (20 meters); 18068-18110 (17 meters); 21000-21200 (15 meters); 24890-24930 (12 meters); and 28000-28300 (10 meters)

Voice operations in the amateur radio bands can be found in the following subbands using primarily the upper (USB) and lower (LSB) sideband modes:

1800-2000 (160 meters-LSB); 3750-4000 (75 meters-LSB); 7150-7300 (40 meters-LSB); 14150-14350 (20 meters-USB); 18110-18168 (17 meters-USB); 21200-21450 (15 meters-USB); 24930-24990 (12 meters-USB); 28300-29700 (10 Meters-USB/FM)

### ■ Shortwave Broadcast Frequencies

Another major user of the HF radio spectrum are the shortwave broadcasters. The main mode you will encounter on these frequencies is AM (amplitude modulation) and the spacing you will normally encounter in these bands is 5 kHz between stations.

2300-2495 (120 meters); 3200-3400 (90 meters); 3900-4000 (75 meters); 4750-5060 (60 meters); 5850-6200 (49 meters); 7100-7350 (41 meters); 9400-9900 (31 meters); 11600-12050 (25 meters); 13570-13800 (22 meters); 15100-15800 (19 meters); 17480-17900 (16 meters); 18900-19020 (15 meters); 21450-21850 (13 meters); 25600-26100 (11 meters)

Now that we have shown you where to find the hams and shortwave broadcasters, what is left of the shortwave spectrum

(approximately 78 percent) is what we call utility frequencies (the primary coverage area of this column).

### ■ Aeronautical Mobile Service

Most monitors do not realize that you can monitor aircraft air-to-ground communications from five continents in the shortwave spectrum. You can hear high-flying transatlantic flights or listen in on exciting rescue operations conducted by the U.S Coast Guard.

Under international agreement, specific band segments have been reserved in the HF spectrum for voice aeronautical communications (the aeronautical mobile service). Almost all the voice transmissions in these aeronautical bands are in USB and English is the primary language used in aero communications. Each frequency is suppose to have 3 kHz separation, but you will find exceptions, especially in the OR (off-route) segments of these aero bands.

The aeronautical bands located in the high frequency spectrum are divided into two distinct sub bands. The first sub band is the one most familiar to HF aviation buffs—the "R" or routed frequencies. This sub band has communications associated with aircraft (civilian and military) that are flying on established national and international civil aeronautical routes. Communications in these frequencies consist of air traffic control, weather information, and private airline company traffic. The "routed" sub band was re-channelized several years ago, and spacing was established at 3 kHz between frequencies at an earlier World Administrative Radio Conference (WARC).

The other aeronautical mobile sub band has been relatively obscure to all but military monitors. Dedicated readers of the yearly *Klingenfuss Guide to Utility Stations* books will recognize the term "OR," which stands for off-route. Military listeners have prowled the OR sub bands for years listening to the heavy concentration of military aeronautical traffic that occurs in them. The military does a lot more off-route flying than the civilian aviation population.

In the final acts of WARC 92, Appendix 26, the aeronautical mobile OR frequencies were standardized into channels spaced 3 kHz apart in the same manner as the routed frequencies. Administrations have until December 15, 1997, to fully implement this change.

Here is a complete list of routed and off-routed sub bands.

Aero bands	Routed sub bands	Off Routed sub bands
2850-3155	2850-3025	3025-3155
3400-3500	3400-3500	-----
3900-3950 (ITU Region 1 only)	3800-3950	-----
4650-4750	4650-4700	4700-4750
5450-5730	5450-5680	5680-5730
6525-6765	6525-6685	6685-6765
8815-9040	8815-8965	8965-9040
10005-10100	10005-10100	-----
11175-11400	11275-11400	11175-11275
13200-13360	13260-13360	13200-13260
15010-15100	-----	15010-15100
17900-18030	17900-17970	17970-18030
21924-22000	21924-22000	-----
23200-23350	-----	23200-23350



## ■ Maritime Mobile Service

If you are looking for communications with a nautical flavor, you have even a bigger selection of frequencies and transmission modes to choose from. Like the aero comms, marine frequencies are divided into subbands. These subbands are used to separate the various modes of transmission that are used on marine frequencies. The basic marine band frequency ranges are:

1635-1800 (ITU Region 1-USB); 2045-2194 (ITU Region 1-USB); 2625-2650 (ITU Region 1-USB); 4063-4438; 6200-6525; 8195-8815; 12330-13200; 16460-17360; 18780-18900; 19680-19800; 22000-22720

Most listeners start their monitoring on the marine bands on the **ship to shore radiotelephone duplex channels**. These stations carry telephonic traffic from commercial ships/fishing vessels, recreational vessels, cruise boats, and some aircraft more than 50 miles off shore from the station's respective coast line.

Each channel is paired (3 kHz spacing) and stations operate semi-duplex in USB; ships transmit on one frequency and the coastal stations on another. Here are the respective ship to shore frequency ranges:

### Coast / Ships

4357-4435 / 4065-4143	6501-6522 / 6200-6221
8719-8812 / 8195-8288	13077-13197 / 12230-12350
17242-17407 / 16360-16525	19755-19797 / 18780-18822
22696-22852 / 22000-22156	26145-26172 / 25070-25097

Most maritime monitors agree that some of the best voice communications can be heard on the marine simplex frequencies. Not only will you hear civilian vessels on these USB frequencies, but U.S. navy and U.S. Army and military vessels from other nations are common visitors on these **simplex maritime channels**. Keep this list handy for some really neat communications.

4125	6227	12290	16531
4146	6230	12353	16534
4149	6516	12356	22159
4417	8219	12359	22162
6215	8294	16420	22165
6224	8297	16528	22168
			22171

There is a set of frequency ranges in each marine band dedicated to **narrow band direct printing modes**. The listener will need a demodulator to decode the digital transmissions in these subbands. The most common digital modes you will encounter include SITOR-A, SITOR-B, and radioteletype (RTTY). Here are the respective coast/ship frequency ranges (0.5 kHz spacing between channels):

### Coast / Ship

4210.5-4219.0 / 4172.5-4181.5	6314.5-6330.5 / 6263.0-6284.5
8417-8436 / 8377-8296	12579.5-12656.5 / 12477.0-12559.5
16807-16902.5 / 16683.5-16805	19681-19703 / 18870.5-18892.5
22376.5-22443 / 22284.5-22443.5	26101-26120.5 / 25173-25208.5

For several years now, usage of Morse code on the marine bands has been on the decline. Morse code subbands continue to lose spectrum space to the more efficient narrow band direct printing modes at international radio conferences. But there are still many **Morse code stations** to monitor in the following frequency ranges:

4221-4351; 6332.5-6501; 8438-8707; 12658.5-13077; 16904.5-17242; 19705-19755; 22445.5-22696; 26122.5-26145

Ships working these stations can be monitored in the following **CW working subbands** (0.5 kHz channel spacing):

4187-4202; 6285-6300; 8341-8376; 12422-12476.5; 16619-16683; 22242-22279; 25161.5-25171

There are other specialized subbands in the marine frequencies for simplex Morse code operations, facsimile transmissions, wideband transmission, and digital selective calling frequencies. A complete breakdown can be found in Bob Grove's *Shortwave Directory*, 8th edition, which is available from Grove Enterprises.

Some of the best and most exotic listening occurs in the fixed station frequency ranges. You will never know for sure what you are going to hear in the slices of the shortwave spectrum. Military, press services, weather facsimile broadcasts, spy numbers broadcast, point to point operations, and much more can be heard in the fixed subbands. Just about any mode that can be transmitted on shortwave will be heard in these frequency ranges. I normally tune through the fixed bands with the USB mode set on my receiver.

The **fixed frequency bands** are:

1705-1800	5730-5950	13360-13600	19800-21000
2107-2170	6765-7000	13800-14000	22720-23200
2194-2300	7300-8195	14350-14995	23350-24890
2505-2850	9040-9500	15600-16460	26950-26960
3155-3200	9775-9995	17360-17550	29800-29890
4000-4063	10100-11175	18030-18068	29910-30000
4438-4650	11400-11650	18168-18780	
5005-5450	12050-12300	18900-19680	

If you need to set that clock in the shack, you might want to check out some of the time and frequency standard stations such as WWV in Fort Collins, Colorado or CHU in Ottawa, Canada. Look for **standard time and frequency stations** on the following frequencies:

2500; 3330; 4500; 5000; 7335; 8000; 10000; 12000; 14670; 15000; 20000; 25000

Finally, in the upper reaches (25 MHz and above) of the shortwave spectrum you will discover some interesting frequency bands authorized here in the United States. The three most common modes you will encounter are AM (CB/shortwave broadcasters), FM, and USB. These allocations include the following:

25010-25330	Land Mobile Service
25330-25600	Government Band
26100-26480	Petroleum Industry
26480-26960	Government Band
26960-27410	Citizens' Band
27410-27540	Land Mobile Service
27540-28000	Government Band
29700-29800	Forestry Service
29890-29910	Government Band

Normally these frequencies are pretty quiet during sunspot minimum such as we are in now. But as we see an increase in those cute little black spots on the face of the sun over the next few years, some interesting communications can be heard on these frequencies from time to time, as conditions permit.

So there you have it—the Utility World HF frequency guide. It is an interesting world of communications to monitor in between the amateur radio and shortwave broadcasts bands. Why not pick out your favorite slice of the spectrum and give it a try today to see what you can hear on the utility bands?



## Abbreviations used in this column

AFB	Air Force Base	LSB	Lower Sideband
ALE	Automatic Link Establishment	MFA	Ministry of Foreign Affairs
AM	Amplitude Modulation	NCC	National Communications Center
ARQ	Synchronous transmission and automatic repetition teleprinter system	NORAD	North American Aerospace Defense Command
ARQ-E	Single channel ARQ teleprinter system	NTA	National Telecommunications Alliance
ARQ-E3	Single channel ARQ ITA3 teleprinter system	PACTOR	Teleprinter system combining certain characteristics of packet radio and SITOR
AT&T	American Telephone and Telegraph	ROCC	Regional Operations Control Center
BBS	Bulletin Board System	RTTY	Radioteletype
CanForce	Canadian Forces Communications Station	RUM-FEC	Romanian diplomatic FEC teleprinter system
Comsta	Continuous Wave (Morse code)	SHARES	Shared Resources
CW	Continuous Wave (Morse code)	SITOR	Simplex teleprinting over radio system
FAF	French Air Force	SITOR-A	Simplex teleprinting over radio system, mode A
Fax	Facsimile	SITOR-B	Simplex teleprinting over radio system, mode B
FBI	Federal Bureau of Investigation	Unid	Unidentified
FEC	Forward Error Correction	U.S.	United States
FEMA	Federal Emergency Management Agency	USB	Upper Sideband
FHWA	Federal Highway Administration	USCG	U.S. Coast Guard
GHFS	Global HF System	USNG	U.S. National Guard
HF	High Frequency		
HQ	Headquarters		
ID	Identification		

All transmissions are USB (upper sideband) unless otherwise indicated. All frequencies are in kHz (kilohertz) and all times are UTC (Coordinated Time Universal)

- 2201.0 VIM-Melbourne Radio, Australia, with weather for Victorian coast at 0945. (Eddy Waters-Australia)
- 3116.0 Irkutsk Volmet, Russia, with aviation weather reports in Russian at 1245. (Takashi Yamaguchi-Nagasaki, Japan)
- 3380.0 4XML-Unid station repeating "V BFR7 de 4XML" in CW at 1415. (Yamaguchi-Japan)
- 3384.0 FDG-FAF Bordeaux, France, with V CW marker at 2309. (Jack Dix-Yonkers, NY)
- 3440.0 6PXJ-Unid station repeating "V ABYZ de 6PXJ" in CW at 1045. (Yamaguchi-Japan)
- 3446.0 R5SA-Unid station repeating "V PV2S de R5SA" in CW at 1130. (Yamaguchi-Japan)
- 3455.0 EBZ-Unid station repeating in chirpy CW "BNS de EBZ" at 1315. (Yamaguchi-Japan)
- 3461.0 Khabarovsk aero, Russia, working various Russian aircraft in Russian at 1150. (Yamaguchi-Japan)
- 3487.0 L8BM-Unid station repeating call in CW at 1140. (Yamaguchi-Japan)
- 4035.0 Spanish female 5-digit number station at 0429 in AM. (Gordon Levine-Anaheim, CA)
- 4227.0 SXA/G/2G/3G-Unid station with V CW marker at 2312. (Dix-NY) *Probably the Greek naval radio at Piraeus-Larry.*
- 4232.0 FUF-French Forces Martinique, with 75 baud RTTY RY test tape at 0118. (Sue Wilden-Columbus, IN)
- 4274.0 KFS-Palo Alto Radio, CA, with CW CQ marker at 0945. (Waters-Australia)
- 4360.0 WCC-Chatham Radio, MA, with CW CQ marker at 0127. (Wilden-IN)
- 4363.0 WOM-AT&T high seas Ft. Lauderdale, FL, with weather broadcasts at 2305 and parallel to 8722. (Gary Wysocki-South Wales, NY)
- 4426.0 VIM-Melbourne Radio, Australia, with weather forecast for Victorian coast at 0945. (Waters-Australia)
- 4439.5 P7X-unid station with 120 5 letter groups in CW at 2144. Very strong signal. (J.L. Metcalfe-KY)
- 4557.0 Reach 40061 with a phone patch to the Dover command post and Metro via AFS2CP at 0309. (Anonymous) TBU5-Unid station transmitting in CW "VVV TBJD de TBU5 QAP K" at 2157. (Dix-NY)
- 4593.5 AFA1AZ checking in to the USAF Region 1 MARS net at 2325. (Wysocki-NY)

- 4630.0 English female 5-digit number station in AM at 0241. (Anonymous)
- 4663.0 Khabarovsk Volmet, Russia, with aviation weather report at 1205. (Yamaguchi-Japan)
- 4721.0 W1N working Mailplug at 0531. (Anonymous)
- 4724.0 Reach 50230 (C-141) with a phone patch to Travis AFB via McClellan GHFS at 0835. Reach 67946 (C-141) with a phone patch to McChord Metro via Andrews GHFS at 2113. (Anonymous)
- 4788.0 FDI22-Unid station with a V CW marker at 2240. (Dix-NY)
- 4891.5 RCWL-Unid station sending "RZ DE RCWL PASO 4880 4880" in CW at 1055. (Dix-NY)
- 5090.0 FDG-FAF Bordeaux Air, France, with a V CW marker at 2250. (Dix-NY)
- 5230.0 SYN2-Israeli Mossad number station at 2149. (Yamaguchi-Japan)
- 5236.0 AAC2MS-USNG Jackson, MS, checking into a SHARES exercise at 1401. Also had KG191-FBI Knoxville, TN, at 1512; WWJ82-FHWA Grand Island, NE, at 1527; WNIM867-SBC Communications St. Louis, MO, at 1439; and WGY924-Mobile FEMA Nashville, TN, at 1650. 924 was operating from a "staging area" in Tennessee. (Metcalfe-KY)
- 5340.0 L9CC-Unid station repeating "V CP17 de L9CC" in CW at 1425. (Yamaguchi-Japan)
- 5371.0 LJK7-unid station with a V CW marker at 2131. (Dix-NY)
- 5457.0 Unid station transmitting 5-letter groups in CW at 2309. (Dix-NY)
- 5530.0 MIW2-Israeli Mossad number station in AM at 0222. (Dix-NY)
- 5746.0 Female English 5-digit number station at 2143. (Dix-NY)
- 5749.5 4XML-Unid station repeating "V BFR7 de 4XML" in CW at 1459. (Yamaguchi-Japan)
- 5750.0 English female 5-digit number station at 0400 in AM. (Anonymous)
- 5752.0 Unid station transmitting 5-letter groups in CW at 2147. (Dix-NY)
- 5813.5 Unid station using 50 baud RTTY transmitting "DE EIAAYHYX" at 2153. (Dix-NY)
- 6395.0 AQP-Karachi Naval Radio, Pakistan, with V CW marker at 2300. (Dix-NY)
- 6397.0 JMC3-Tokyo Meteo, Japan, with CW weather information at 0923. (Waters-Australia)
- 6445.0 UFL/UIK-Vladivostok Radio, Russia, with V CW marker at 1110. (Waters-Australia)
- 6460.0 UKA-Vladivostok Radio, Russia, with 50 baud RTTY messages in Russian at 1118. (Waters-Australia)
- 6480.0 TBH3-Izmir Naval Radio, Turkey, with CW broadcast for T43B at 2303. (Dix-NY)
- 6536.0 3YJA-Unid station sending the following in CW at 2259: "CAMY DE 3YJA QBE QYT1." (Dix-NY)
- 6658.0 SYN2-Israeli Mossad number station at 2149. (Yamaguchi-Japan) Heard same at 1358. (Dix-NY)
- 6683.0 Nightwatch 01 working Andrews AFB at 0154 testing RTTY systems. (Anonymous)
- 6692.0 Khabarovsk and Magadan working various air carriers along the eastern seaboard of Russia. (Evan Murray-Auckland, New Zealand) *This is a North Central Asia (NCA) regional and domestic air route area (RDARA). Other stations that have been monitored on this frequency (in addition to the above) include: Sovetskaya Gavan (Sov Gavan), Russia and Yuzhno-Sakhalinsk, Russia-Larry*
- 6745.0 ELB2-Israeli Mossad number station at 1410. (Yamaguchi-Japan)
- 6751.0 Homeplate calling 963/964/Boundary Kilo at 2035. Thought this was a Canadian forces frequency but these units are talking about fuel in gallons. What else is on this frequency? (Wysocki-NY) *This is also used by units working with NORAD and the Canadian ROCC (callsign Sidecar). Probably US air assets-Larry.*
- 6754.0 CanForce St. Johns military volmet with aviation weather at 2220. (Wysocki-NY)
- 6761.0 Indy 82 calling Brickyard Control at 1524. (Metcalfe-KY)
- 6781.0 HMA-unid station with CQ CW marker in chirpy CW at 0745. (Yamaguchi-Japan)
- 6786.0 Spanish female 5-digit number station in AM at 0611. (Anonymous)
- 6802.2 WWJ85-FHWA Ames, IA, accessing the SHARES BBS in PACTOR at 2237. BBS is maintained by KGD34-NCC Arlington, VA. KGD34 also is maintaining a BBS on 13242.0. (Metcalfe-KY)
- 6803.1 WPEH727 Portable-AT&T Bedminster, NJ, with a "phone call via radio" at 2108. (Metcalfe-KY)
- 6856.0 Spanish female 5-digit number station at 0329 in LSB. (Anonymous)
- 6933.0 Unid station transmitting 5-letter groups in CW at 1212. (Dix-NY)
- 6959.0 English female (British accent) number station at 2229. (Kevin Nauta-



- Grand Rapids, MI, via email) Heard same at 2101. (Kenny Love-Columbia, SC) *This is an English female 5-digit Lincolnshire Poacher number station-Larry.*
- 6970.0 Station 15 sending KL-43 traffic to the fifth marines at 1731. (Matthew Cawby-Mount Lake Terrace, WA)
- 6983.0 Spanish female 5-digit number station in AM at 1106. (Anonymous)
- 7039.0 F/C/S/M-Single Letter HF CW markers (*Russian Navy-Larry*) at 1425. 'M' station was extremely strong with a dirty distinctive hum. First time I have heard four of these stations on a single frequency. (Yamaguchi-Japan) *Ary B, please take note-Larry.*
- 7080.0 L9CC-Unid station repeating "V CP17 de L9CC" at 1415. Another day same transmission was heard on 7070 at 1353. (Yamaguchi-Japan)
- 7309.7 RFLIG-French Forces Cayenne, French Guiana, with a 100 baud idling ARQ-E3 signal at 1118. (Waters-Australia)
- 7552.1 WNFT417-NTA (National Telecommunications Alliance) Washington, D.C., and KGD34-NCC Arlington, VA, at 1722. KGD34 had just concluded data tests with another station. (Metcalf-KY)
- 7726.0 Spanish female 5-digit number station in AM at 0502. (Anonymous)
- 7850.0 A strong ALE pulse at 1932. USB probably. (Metcalf-KY)
- 7890.0 Spanish female 5-digit number station in AM at 0235. (Anonymous)
- 8001.7 RFLIG-French Forces Fort de France, Martinique, with a 96 baud idling ARQ-E3 signal at 1122. (Waters-Australia)
- 8014.0 English female 3/2-digit number station in AM at 1115. Also noted on 8016/10597. (Yamaguchi-Japan)
- 8016.0 English female 3/2-digit number station in AM at 1115. Noted at 1206 parallel on 8014/10597. (Yamaguchi-Japan)
- 8038.5 Sledgehammer with routine unclassified message for Killerbee at 0239. (Cawby-WA)
- 8137.0 Unid station transmitting 5-letter groups in CW at 1224. (Dix-NY)
- 8176.0 VIM-Melbourne Radio, Australia, with a weather forecast for the Victorian coast at 0945. (Waters-Australia)
- 8320.0 English female 5-digit Lincolnshire Poacher number station at 1441. (Yamaguchi-Japan)
- 8421.0 VRX-Hong Kong Radio, Hong Kong, with SITOR-B message to 3FJ15 at 0920. (Waters-Australia)
- 8444.5 KFS-Palo Alto Radio, CA, with CW CQ marker at 1045. (Waters-Australia)
- 8473.5 WLO-Mobile, AL, running a traffic list and weather in PACTOR at 1935. (Metcalf-KY)
- 8476.1 ESA-Tallinn Radio, Estonia, with CW DE marker at 1105. (Waters-Australia)
- 8488.0 ZSO-Unid station with DE CW marker at 0145. (Dix-NY)
- 8493.0 CLA-Havana Radio, Cuba, with CW marker at 1859. (Wilden-IN) *This might be a spur of one of their 8 MHz freqs-Larry.*
- 8523.4 J0S-Nagasaki Radio, Japan, with V CW marker at 0905. (Waters-Australia)
- 8546.0 XFU-Vera Cruz Radio, Mexico, with CQ CW marker at 2307. (Dix-NY)
- 8639.0 CTV8-Com Nunes Ribeiro Naval Radio, Portugal, at 2112 calling CTRJ in CW. (Dix-NY) *Nice catch Jack. Not reported very often-Larry.*
- 8683.0 IRM-CIRM Rome Radio, Italy, with V CW marker at 2345. (Roger Parmenter-Hyannis, MA)
- 8779.0 JBO-Tokyo Radio, Japan, working unid ship making arrangements for phone patch the next day. Noted at 1000. (Waters-Australia)
- 8819.0 Alma Ata Volmet, Russia, with aviation weather reports in Russian at 1219. (Yamaguchi-Japan)
- 8828.0 Auckland Volmet, New Zealand, with English aviation weather reports at 1020. (Yamaguchi-Japan)
- 8968.0 Andrews GHFS working Look 76 passing Mystic Star working discrete for next days flight (F-117). (Don Storck via email)
- 8974.0 Two unid Spanish speaking males with frequent mention of mostar and an attack on the Moslems by Croats at 0854. Spanish military. (Murray-NZ) *This has been reported in the past, Evan, as a military frequency of Spain-Larry.*
- 8978.4 Habitat calling A5M at 0035. (Metcalf-KY) V1D working Habitat at 0017 with contact report. (Cawby-WA)
- 8978.5 Habitat (Whidbey Island) working M5V discussing three hour buoys at 1826. Also relay of messages to Magic Carpet Sierra. (Russkil via email)
- 8983.0 Y5L working USCG Comsta New Orleans at 0108. (Anonymous)
- 9025.0 Aircraft 487 working Smitty(?) Base in LSB, USB, AM, and CW at 1440. Some ALE here, too. (Metcalf-KY)
- 9044.9 5YE1-Nairobi Meteo, Nigeria, with fax weather chart (120/576) at 2109. (Dix-NY)
- 9106.0 WGY916-FEMA Denton, TX, at 1731. Said 916 was a MRV (Multi-Radio Van). AAB1DE-USNG HQ Wilmington, DE, at 1933 and WGY966-FEMA Conway, AR, at 1934. (Metcalf-KY)
- 9141.5 Unid stations 02 working 03 at 0015. (Anonymous)
- 9143.5 23 Bravo requesting permission from 10 Foxrot to engage target (a vehilce near a creek) at 0154. (Cawby-WA) *Looks like a U.S. Marine frequency-Larry.*
- 9263.0 English female 5-digit Lincolnshire Poacher number station at 1135. Also noted on 14469/13566. (Yamaguchi-Japan)
- 9641.0 Unid station, female with long series of letters phonetically at 1445. Possible Mossad station. (Yamaguchi-Japan)
- 10107.0 ATE60-Delhi Meteo, India, with a fax (120/576) weather map at 1145. (Waters-Australia)
- 10140.0 Possible UKA-Vladivostok Radio, Russia, with 50 baud RTTY message in Russian at 1128. Mentioned Vladivostok several times. (Waters-Australia)
- 10452.0 English female 5-digit Lincolnshire Poacher number station at 1035. Also noted on 17499. (Yamaguchi-Japan)
- 10597.0 English female 3/2-digit number station in AM at 1115, also noted on 8014/8016 and at 1206 on 7547. (Yamaguchi-Japan)
- 11006.0 Unid station with Quick Brown Fox and counting in 75 baud RTTY at 1339. Very strong signal, but never gave an ID. (Metcalf-KY)
- 11175.0 Unid station passing EAM at 0636. (George Talbot via email). BS 930 working unid GHFS station with phone patch to Raymond 9 at 2230. Arrival message. (Steve Clark-Pampa, TX)
- 11184.0 ZG9D-Unid station with DE CW marker at 1512. (Dix-NY)
- 11212.0 Unid station transmitting meteorology codes in CW at 1907. (Dix-NY)
- 11218.4 Gunpost 21 calling Gunpost 21 Alpha on 11218.4 at 0024. (Anonymous)
- 11417.0 OLX-Prague Radio, Czech Republic, with V CW marker at 1358. (Dix-NY)
- 11570.0 English female 5-digit Lincolnshire Poacher number station at 1212, also noted on 13866. (Yamaguchi-Japan)
- 12070.0 WUG (US Army Corp of Engineers) working various stations on channel 10 at 1555. (Anonymous)
- 12739.0 UAT-Moscow Radio, Russia, with CQ CW marker at 1234. (Dix-NY)
- 12831.0 3BM-Port Saint Louis Radio, Mauritius, with CQ CW marker at 1818. (Dix-NY)
- 13242.0 Albroom GHFS calling SAM 90300 at 1901. (Anonymous)
- 13346.0 CRA-Unid station sending hand sent CW "VVV Test de CRA" at 1821. (Dix-NY)
- 13516.0 Unid station sending "965 965 1" in CW at 1422. (Dix-NY)
- 13594.0 Spanish female 5-digit number station in AM at 1830. (Dix-NY)
- 13866.0 English female 5-digit Lincolnshire Poacher number station at 1135, also noted on 14469/9263 and at 1412 on 11570. (Yamaguchi-Japan)
- 13874.0 Unid station transmitting 5-figure groups in CW at 1422. (Dix-NY)
- 14469.0 English female 5-digit Lincolnshire Poacher number station at 1135, also noted on 13866/9263. (Yamaguchi-Japan)
- 14487.0 English female 5-digit Lincolnshire Poacher number station at 1135, also noted on 15682/16084. (Yamaguchi-Japan)
- 15641.0 Unid station sending continuous "TTT 364 364 364" in CW at 1452. (Dix-NY)
- 15682.0 English female 5-digit Lincolnshire Poacher number station at 1040, also noted on 16084/14487. (Yamaguchi-Japan)
- 16084.0 English female 5-digit Lincolnshire Poacher number station at 1040, also noted on 15682/14487. (Yamaguchi-Japan)
- 16332.0 VSG-MFA Bucharest, Bulgaria, with 164.5 baud RUM-FEC transmission of an eight page economic review at 1140. (Robert Hall-Capetown, RSA)
- 16355.2 OMZ-MFA Prague, Czech Republic, with news bulletins in Czech using 100 baud RTTY at 0934. Also caught on 16357.2 at 1209. (Hall-RSA)
- 16380.3 RFFTD-FAF Vilacoublay, France, with ARQ-E3 traffic to RVVIPP-French Navy Le Port, Reunion, at 1126. (Hall-RSA)
- 16817.1 WCC-Chatham Radio, MA, with SITOR-B high seas forecast and gale warnings at 1240. (Hall-RSA)
- 16955.0 YLQ-Riga Radio, Latvia, with CW ID "YLQ Scan" and SITOR-A idler at 1501. (Dix-NY)
- 17014.0 5BA-Nicosia Radio, Cyprus, with CQ CW marker at 1533. (Dix-NY)
- 17499.0 English female 5-digit Lincolnshire Poacher number station at 1035, also noted on 10452. (Yamaguchi-Japan)
- 18020.0 SAM 90300 working Ascension Island GHFS (off frequency) at 1913. Moved to 18019 at 1918. (Anonymous)
- 18380.4 RFFBBHU-French Forces Versailles, France, with 5-letter groups ARQ-E3 traffic to RfvITX-Le Port, Reunion at 1625. Also caught RFFAAP-Guerre Dipermil with admin traffic to RfvITX at 1630. (Hall-RSA)
- 19048.8 RFTJ-French Forces Dakar, Senegal, with 192 baud ARQ-E3 Code de Voie on the LFA circuit at 1600. (Hall-RSA)
- 20949.9 6XM8-BND/Mossad station using 192 baud ARQ-E with crypto traffic at 1309. (Hall-RSA)



Glenn Hauser, P.O. Box 1684-MT, Enid, OK 73702  
E-mail: <ghauser@hotmail.com>; fax: (405) 233-2948, ATT: Hauser


## France Quits Shortwave To Us; Others Expand

MT's Jacques d'Avignon reports confirmation that Radio France Internationale would cease all shortwave broadcasts to North America at the end of March due to budget reductions, in favor of satellite and cable. Already in mid-March, Joe Hanlon and I noted the 1200 English broadcast on 13625 replaced by music in French, because of yet another strike. RFI is out of touch with its English audience, its shortwave audience, French audience (which likes music not only during strikes), and its own workers. RFI French-only relays may be found in a few cities such as New York and Boston via AM and FM stations.

Also in the negative column: Russia is cutting back even more on shortwave services; Papua New Guinea had to go commercial;

the Investment Channel failed to show up; Radio Japan dumped a lot of programming and staff including its DX show as did Radio Portugal. KNLS Alaska also started over with new people.

There's still some growth: Tibet talks about broadcasting in English; Mongolia sneaked in a new shortwave station including some English; Maldives plans a comeback on SW; XERTA has still been working to get on the air. Religious broadcasting expansions are planned in Chile, Hawaii, Zambia, and already in Georgia. Meanwhile, Radio Free Asia has been uniformly denounced by the Asian dictatorship it targets, fearful of free information. And a Cuban Democrat has been put in charge of Radio Martí!



**ALASKA** For 1997, KNLS has all new programs, writers, and announcers. Four new series are planned introducing Alaska. Rather than mixing music, each broadcast will feature a single artist, group, or music style. Marcy Bryan presents a new series of tutorials on American idioms. Personal messages to the KNLS audience of no more than 30 seconds can now be offered for airing, recorded on a good recorder and tape. Include your name and location and then say what you wish; cassettes will not be returned. Carl Mann returns with a new daily series *DX Definitions*. For Z-97, English hours are at 0800 on 9615, 1300 on 7365 (*Alaska Calling* via Christopher J. Williams, World DX Club Contact)

**ALBANIA** R. Tirana in early March was reporting on unrest and anarchy. 0145 on 7160; also on 7270 0030-0120+ in Albanian, folk music, 0055 news; 0230 English on 7159.3v but then missing during anarchy (Roger Chambers, NY) Scheduled broadcasts from R. Tirana and TWR were missing (Chris Hambly, Australia) TWR HQ people in Cary, NC, praying next government will allow TWR (AP NC via Mike Cooper)

**ANGOLA** R. Nacional, 3374.92, doing well on all-night service, 0255 mostly English-language pop music, bit of Portuguese talk at 0302-0304, magazine show 0330-0336, more music until 0500 (Randy Stewart, MO)

V. of Resistance of Black Cockere: 0500-0900 on 9750, 1100-1430 on 11830, 1655-2100 on 6095, including English daily 1830-1845, news at 1840 (BBCM)

**ANTARCTICA** LRA36, 15476, official schedule is "1900-2100", includes IDs in English, French at odd times; gives coordinates, requests return postage to this address: LRA36, 9411 Esperanza Station, Tierra del Fuego, Antártida e Islas del Atlántico Sur, Argentina. Planned increase to 3 kW soon (Gabriel Iván Barrera, BC-DX) Announcer is Mrs. Adriana Figueroa (Barrera, EDXP via *The Four Winds*) Opening and closing theme is *Así es mi Argentina* (Barrera, RN Radio-Enlace)



**AUSTRALIA** Comms Minister Richard Alston has indicated to Channel Ten that R. Australia, the international service, may stay, contrary to Mansfield Review (ABC news via Mike Cooper)

**BAHRAIN** USN personnel confirm R. Bahrain is inactive on SW 6010.9745 (Dan Henderson, DX Ontario via *DXing with Cumbre*) Gulf News Agency, WAKH has RTTY press in Arabic 0500-1500 daily on 14764v, 9197v (BBCM) Not voice as implied on RVI *Radio World* (gh)

**BOLIVIA** R. Illimani at 1055-1102 on 5714, strong,

distorted, mostly readable in FM with ID as "La Voz de Bolivia, 49 metros" //4945 where not distorted but weaker (Don Moore, IA)

R. Norte, Montero, audible on 4939.2 when the Venezuelan was missing, 2300-0125\* closing with English ID, but very distorted audio (Henrik Klemetz, Colombia, DSWCI DX Window)

**BRAZIL** Heavy summer rains damaged the 25mb antenna of R. Aparecida, increasing the SWR. Tho allowed to use 7.5 kW, they decreased power to 500 W to avoid injuring the transmitter, but 11855 is still on the air, audible here (deCastro, Brazil, NASWA Journal)

**CHILE** I visited the former transmitter site of R. Nacional, now owned by Christian Vision. They are adjusting and testing the eight 100kW Harris transmitters which are to be repaired. Three log-periodic antennas are OK, but two of the four curtains, beamed to Americas, will not be used due to their catastrophic state. They are not allowed to use R. Nacional frequencies, so must look for new ones. Transmitters may be moved to another country, but if all goes well in Chile, tests on air could start by end of April, official broadcasts by October (Felipe Asenjo, Santiago, *Cumbre DX* via *Electronic DX Press*)

R. Esperanza, 6090 heard at 0050-0101 with religion; surprised not blocked by some big station (Don Moore, IA) *Like Anguilla, often missing-gh*

**CHINA** CRI's 0400 relay via French Guiana on 9790 ex-9730, usually best signal and audio from them, but has same whine as on Switzerland 9905 relay. Naturally they still didn't know about it at the Beijing studios, and may not for months (gh)

**COSTA RICA** RFPI's 15049 delta-quad antenna was bent out of shape by high winds in early March, so that frequency could not be used (gh) All three of our antenna systems were affected by the nonstop high winds. No fun to be atop a 160 foot tower in these conditions. Hustled to make provisional 19 and 49mb antennas.

*Our Americas*, mentioned last month, has been retimed for 2nd quarter into two weekly segments: Thu 1830, Sat 2030 plus repeats 8 and 15 hours later. Check the program's website: <http://www.dorsai.org/~wbai/ouramer/index.html> Jennifer Harbury's CIA show is now scheduled: Fri 1845, Sun 2215. Richard McCarthy, suffering from Gulf War Syndrome, had to suspend production of his *Report from the Desert* (Joe Bernard, RFPI) Electric rates went up 12% (*Tico Times* via RFPI)

**CYPRUS NORTHERN** Reply from Mustafa Tosun, head of transmission dept. at R. Bayrak, said nominal 6150, but had tested 6159, 6160; E-mail: <btr@cc.emu.edu.tr>

(Dan Henderson, NU via BC-DX) Includes English news daily at 1415, 1930 local (BRT International via Christoph Ratzer, BC-DX)

**ECUADOR** HCJB Z-97 English changes: 0700-1058 SPac 9645, 0730-0930 Eu 5865 (via Panlview) Not mentioned on DX Partyline, but *Studio Nine* reported that a 5-year project building a new hydroelectric dam to power transmitters, in an eco-reserve with treach-

*All times UTC; All frequencies kHz; \* before hr = sign on, \* after hr = sign off; // = parallel programming; + = continuing but not monitored; 2 x freq = 2nd harmonic; Z-9 = Summer season; W-9 = Winter season; [non] = Broadcast to or for the listed country, but not necessarily originating there.*



erous access, had been dedicated (Chet Copeland, *World of Radio*) HCJB fears there may be harmonic interference problems at the new Quito International Airport, which is too close to HCJB transmitter site (DXPL via BC-DX) See ZAMBIA

**GEORGIA** High Adventure Ministries, "Voice of Hope for All Europe" heard on new 7520 in English 1915-2100\*, no site given but address in England and not // Lebanon 6280 (Nikolay Pashkevich, Moscow, *Electronic DX Press*) Fax from station confirms site is Dusheti, Georgia, 100 kW at 302° (Ed Rausch, *NU* via EDXP) Also very good in Australia, s/off varies between 2000 and 2100 (Bob Padula, *ibid.*) Z-97 changing to 9310, and from May 1 hopes to add a service to India: Georgia site confirmed (George Jacobs, broker via George Thurman)

**GERMANY** Deutsche Welle Z-97 English transmission schedule shows info of interest in NAM: at 0200 there is no Portugal transmitter on the Asian service, formerly audible in NAM: 0500 has Bonaire on 5960; 0900 Antigua on 6160; 1900 Kigali on 9735, 11810; 2100 Kigali on 9735, 15135 all beamed 295° toward America (via Andreas Volk) And 0900-0950 on 15205 is via RN Madagascar 200 kW (BC-DX)

**GREECE** An agreement between VOA and Greece provides for a number of American FM, MW and SW transmitters to be gradually handed over to Greek State Radio, expected to boost range and reception and increase SW broadcasting times (VOG news via John Babbis)

**HAWAII** KWHI plans to install a second transmitter, using the already existing log-periodic antenna: World Harvest Radio also plans a 5th transmitter, perhaps in the Caribbean or Africa for better coverage of Central Africa. Also looking at existing facilities (Joe Hill, WHR, HCJB DX Partyline) Possibly US Virgin Islands, or US East Coast (Joe Brashier, WHR, DXing with Cumbre)

**HONDURAS** Tests from La Voz de la Mosquitia, 4910v, never heard, so called HQ in Mississippi: said three transmitters had been tested and picked up at HQ; keep trying in the 2300-0300 period (Hans Johnson, DXing with Cumbre)

**HUNGARY** Len Scott, a.k.a. Laszlo Pinter, died Jan 8 at age 67; had done the DX program on R. Budapest until retiring in 1989 (R. Budapest via BC-DX)

**INDIA** AIR GOS to SAs at 1330-1500 on new 9545 //11620, 13710 (Alok Dasgupta, India, EDX?) Poor audio of AIR on Internet, mentioned in March, is due to the server operating from faraway Flint, Michigan (Radio Netherlands Media Network)

**ISRAEL** Reshet Bet, Hebrew has been running all-night since March 1 on 9390 ex-7495; Z-97 English: 0400-0415 on 17545, 9435, 7465; 1400-1430 on 11605, 15615; 1900-1925 on 7465, 9435, 11605, 15460. Most of these are beamed northwest toward Eu/NAM except 17545, 15640 (via Mark Veldhuis, Holland, BC-DX)

**JAPAN** Radi Japan planned to drop *Media Roundup* at the end of March as yen are being diverted from radio to TV (R. Netherlands Media Network) Too bad, but with the exception of Bruce MacGibbon's contributions, this was the dreariest, least spontaneous DX program on a major broadcaster. The so-called "DX news" at the beginning often had nothing to do with listening to the shortwave radio -gh, critic!



Mor schedule changes from April include: 2-3 hours consecutive in Japanese; English on General Service; abolish English hours at 0300, 1400, 2300. To NAM new 13630, 15230 at 0500-0530; new time 0600-0700 on 9835, 12030, 15230; 2100-2200 on 13630; 0700-0800 Gabon on new 15230 (RJMR)

**JORDAN** Jordan's neat mailbag program, *SINPO-CON* Sat 1630-1650 on 11690, disappeared in early March as abruptly as it had appeared; possibly retired? (gh)

**KAMPUIHEA** The Khmer Rouge station is on 5405 at 2330-0130+ and 1130-1330: believed to be at the mountain base Phnom Malai near the Thai border (Sarith Werakoon, Union of Asian DXers via DSWCI DX Window)

**KASHNR** V. of Kashmir Freedom, P.O. Box 102, Muzaffarabad, Azad Kashmir, via Paistan, in AM or USB: Urdu 0230-0330 on 6300 5750 5300; 0830-0930 on 6300 530; Kashmiri 1530-1730 on 6300 5300 4116. In past has also broadcast in English (BBCM)

**KIRIBATI** R. Kiribati on new 9810 ex-9825 following interference complaints from Christmas Island audience, on air with 1 kW at 0530-0930 only, including English 000-0700 starting with R. Australia news; transmitter cutting off every few seconds believed due to a vox circuit (Dave Valko & Hans Johnson, Maui, *Cumbre X* via DX Window)

**KORA SOUTH** RKL went live on Internet March 3 with programming from the 7275 hannel, including English hours at 0200, 2000 (Bill Matthews, OH) <http://www.kbs.co.kr> Also adding toll-free fax number from 22 countries for reports including from USA 1-888-229-2312; Canada 1-888-211-5864; E-mail addresses for each language service by June (RKL SW Feedback) No change in Z-97 English schedule direct from Korea, only from relays: Skelton 3970 at 2100 ex-1930; usual Sackville 1030 11715 ex-1130 9650 (RKL SW Feedback)

KBS-1 still has English news at 1350 on 3930, announced as Mon-Sat (Dave Valko & Hans Johnson, Maui, *Cumbre DX* via DX Window)

**KURDISTAN** New in February was Harim Radio, voice of the regional government of Iraqi Kurdistan (Kurdish: *Era Radiyo Harim, dangi hukumati harimi Kurdistan Iraq*), 1400-1530 on 4070. Also first heard in Feb, Freedom Radio Station appears to share facilities with Voice of the Iraqi People. FRS (Kurdish: *Era Ezgay Azadiya, Dengi hizbi Shuyu'i Kurdistan Iraq*), 1630-1730 on 7695 3905-3955v. V. of the Iraqi People, voice of democracy and progress, radio of the Iraqi Communist Party, in Arabic 0400-0530, 1730-1830 on same. All one hour earlier in summer (BBC Monitoring)

**LESOTHO** R. Lesotho, 4800 at 0300-2200: has English news at 0500-0505 (BBCM)

**LIBYA** Tone tests heard from new 500 kW transmitters in mid-Feb after 1000 on 6155, 7120, 9655, 9705, 11770 (Wolfgang Büschel, Germany, BC-DX) This was the lead item on an HCJB 'DX Partyline,' but the source was deliberately deleted; what an insult! -gh. Later: still heard around 0900-1000 on 6155, 7120, very good on 9705, very poor on 11805, 11875 (*ibid.*)

**MADAGASCAR** Strong signal out of 5009.5 with their wacky interval signal from \*0257, choral anthem, music; fades after 0400 (John H. Cobb, Jr., GA)

**MALDIVES** V. of Maldives plans to return to SW this year with a 1.5 kW 60mb transmitter donated by Australia (Ahmed Ibrahim Didi, Maldives, *Cumbre DX* via BC-DX)

**MALI** R. Bamako at \*0800 on 7283.88, 9634.93, 11960.16 with ID, local language (Thomas Lindenthau, Germany, HCJB DX Partyline)

**MALTA** [non] V. of Mediterranean, via Russia on new 12060 ex-7390 //7440 at 2000; registered as Almaty site, but may be Samara (Klaus Lieberworth, Germany, via Kai Ludwig, *Electronic DX Press*) Both heard but better on 7440; no DX program (Tom Sundstrom, NJ)

**MÉXICO** In early March we noticed that XERMX, 9705, had replaced the DX and mailbag programs in Spanish and English by music, so we asked the host of those programs, Dr. Julián Santiago Díez de Bonilla, what had happened. A reply came from Héctor Bojorge García (gh) At the end of February, Dr. Julián took his leave of those programs, because he and Alejandro Morales had set a goal of promoting DXing on this station and felt they had fulfilled their objectives and expectations. They believe it is time for people at the station to take over the programs. He is taking a six-month break, to return perhaps on another station. It's very likely that R. México Internacional will produce a DX program like *Encuentro DX* in a few months. Meanwhile we will hear music.

As for XERTA, there were only two days of testing, in February, at midday and only for a few hours on 4800 kHz, since they had lots of problems with the antenna; they are now building and installing a new one. When they are finished and have some testing dates we will let you know immediately. (Bojorge, *World of Radio*)

**MOÇAMBIQUE** R. Mozambique National Program in Portuguese is irregular on 4855 at \*0245-2210\*, joined by 9619v at 0329. Announcements in English and Swahili are included at 0245-0255. Variable frequencies used in past include 11818, 7242, 6112, 5110, 4867, 3210. Beira A program is heard on 3370v/6025v, Beira B on 3280v/9637v. Fax in Maputo: +258-1-421816 (BBCM)

**MONACO** TWR Z-97 English 0655-0820 (Sat 0645-0805, Sun 0645-0820) on new 9755 (BC-DX)

**MONGOLIA** R. Ulan Bator was renamed Voice of Mongolia on Jan. 1, since a new commercial FM station there is called R. Ulan Bator. English: 1330-1400

12085 Au/SAs; 1530-1600 9745, 12085 Au/SEu; 1930-2000 9745, 12085 Eu (Japan BCL Federation via R. Japan Media Roundup)

New SW station is R. Blue Sky, 4850, 1300-1500\* including half-hours in English with news from VOM, language lessons (Nagoya DX Circle via *Electronic DX Press*) Mostly Western pop music, with English lessons at 1300-1330, 5-minute English news after 1400; heard as early as 0900, probably leased frequency



## DX Listening Digest

More broadcasting information by country compiled by Glenn Hauser

## Review of International Broadcasting

SW Programming, opinion, equipment, satellite monitoring.

Samples \$2.50 each (outside North America US \$3 or 6 IRCs)

10 issue subscriptions \$26 in USA, or both for \$49

Glenn Hauser, Box 1684-MT, Enid, OK 73702



from R. Mongolia (Yoshinori Kato, R. Japan *Media Roundup*) Sked is 0000-1500 on 4850 and FM 100.9, started Dec 15, 1994 (ABI via RJMR)

**NETHERLANDS** RN Z-97 English changes include: 2330-0125 back on 9845-(B)onaire // 6165-B and 6020-(F)levo (via *PanView*) 0430 on 6165, 9590 Bonaire; 0730 & 0830 on 9720, 9820 Bonaire; 1330 & 1430 on Madagascar 9810, 12090, Tashkent 15585 (BC-DX) Spanish: 2230-0125 on 15315-B, 9895-F; 2230-2325 also 11680-B; 2230-2425 also 11715-F; 0230-0425 6020-F, 6165, 9590-B (RN *Radio-Enlace*) RN holds an open house in Hilversum on its anniversary, June 7 (*Media Network*)



**Radio Nederland**  
Apartado 880-1007 Centro Colon Costa Rica

**NIGERIA** V. of Nigeria, presumed on 15120 at 1635-1715+ with continuous Afro pops in mid-Feb (Brian Alexander, PA, *World of Radio*) Back on this frequency testing after a few months' absence; not to be confused with XERTA, also planning to use this channel (gh)

**PAKISTAN** R. Pakistan English at 1600-1630 on 9513.6 ex-9903 (*PanView*)

**PAPUA NEW GUINEA** NBC reported that both its national networks had been fully commercialized for financial reasons (Ian Baxter, Australia) 100 kW Port Moresby is on 9675 at 2200-0900, 4890 at 0900-2200; only announces "100 FM" (Arthur Cushen, NZ, RNMN)

**PARAGUAY** R. Nacional, 9737, 0715 nice love songs, 0720 government news (Gigi Lytle, TX, *World of Radio*) Also can be heard in evenings just down from HCJB (gh) Varied down to 9735.9 at 0000 (Wolfgang Büschel, BC-DX)

R. Guairá reactivated on 5976.23v at 1402-1509 //FM 103.5, call-in contest, 1509 news, still on at 1900 recheck. Modulation 50% (Levi Iversen, Paraguay, *NU* via *DXing with Cumbre*, *EDXP*)

**PERU** SW stations out of service as of January, illegals ordered to cease: R. Frecuencia Popular, 4012; R. Estelar, 5767.1; R. La Voz del Alto Mayo, 6137.5; R. Estación Lasser (not Lasser), 4705/5275v; Estación Tarapoto/Yurimaguas, 6238v; R. La Voz de Naranjos, 4300.1. And cancelling its SW license was OX9W, R. Comercial Educativa, La Peca, 4850 (Takayuki Inoue Nozaki, *Radio Nuevo Mundo*) R. Ilucán, which was licensed to a new frequency, still heard in March on old 5619.22 until 0233\* (Brian Alexander, PA, *World of Radio*) R. La Voz del Campesino del Alto Piura, 4004.9 at 2354-0110\* (Pedro F. Arrunátegui, Lima) It's at San Miguel de El Faique, Piura Dept., 250 W formerly used by R. Grau (Takayuki Inoue N., Japan) *Don't call him Nozaki; that's his matronymic-gh.*

There are two Radios San Juan near Bagua: on 4420.2, announced as 4400, from Aramango, just north of Bagua, until 0003\*; and the other on 5775.3 at Lonya Grande, south of Bagua, "2355-0319" (Henrik Klemetz, Colombia, DSWCI *DX Window*)

**PORTUGAL** R. Portugal announced that its Feb. 22 DX program was the final one (Pete Costello, NJ, *World of Radio*)

**RDP**  
**RÁDIO PORTUGAL**

**RUSSIA** Managers of R. Rossii, Golos Rossii, Mayak, say state radio is dying. Mayak reduced from 24 to 14 hpd; 80% of state subsidy goes to distribution costs. Workers threatened to strike March 27 for back pay (ITAR-TASS via OMRI via David Crawford, *DXing with Cumbre*) VOR reduced Russian from 18 to 10 hpd (BBCM) *Kamchatka Rybatskaya* program from Petropavlovsk, 2000-2100 Tue/Thu/Sat on 7255, 12050 (Nikolai Rudnev, *ASK-DX* via *Play-DX*) *That's a show for the fishing fleet, probably one hour earlier for summer-gh.*

**SAIPAN** KHBI dropped four broadcasts on March 11: 0000 on 15725, 1400 on 9355, 1600 on 9385, 2200 on 15665 (MARE and MRI websites via Jim Moats) Will these be replaced by Radio Free Asia? (Moats)

**SOMALIA** R. Hargeisa, V. of the Republic of Somaliland, on new 7534.7v heard in UK from fade-in 1700 until 1800\* or 1900\* with news at 1745 (BBCM) fade in at 1640 until 1800\* on 7537.7 drifting rapidly to 7539, USB plus carrier (Dave Valko, Maui, *Cumbre DX* via *DX Window*)

**SOUTH AFRICA** [non] Guess what? Another month went by and still no trace of the much-hyped extensive schedule of The Investment Channel (gh) Jerry Hoffman, head of the project, was sentenced to two years in prison for fraud in 1971, banned from doing business in New York, according to *New York Times* and *Youngstown Vindicator*. IC was evicted from Atlanta offices, tho Hoffman said the owners refused to fix them up; moved to a new location and ready to start up shortly (RNMN)

**SYRIA** R. Damascus resumed 13610, Arabic 0600-1600; Russian, German, French, English at 1700-2415 (*PanView*)

**TAJIKISTAN** R. Dushanbé external service in English: 0345-0400 on 4975, 9905; 1645-1700 on 7245 (BBCM via *EDXP*)

[non] V. of Free Tajikistan said it would broadcast from 0300 on 5965, 0600 on 7100 (BBCM)

**TIBET** For several evenings last November, they had an English ID, "People's Broadcasting Station of Tibet." Also, "You are tuned to Tibet" and "Radio Tibet, Lhasa. This broadcast is for overseas listeners." Also indicated plans to broadcast in foreign languages such as Japanese. That was at 1500; since then they give the same English ID at same time every night, but no foreign languages noted as yet. We shall see. They went off 7110 about two years ago. Were on 7195 for a while and recently came on 6110 under VOA. 7195 is an old Xinjiang spot but they too left it long ago. It is now occupied by V. of Russia in Chinese until 1600\* (Mike Ryan, HSQZCE, Bangkok)

**TURKEY** Two VOT transmitter at Çakirlar were off for repairs, causing schedule changes and fewer SSB broadcasts (BC-DX) Tentative Z-97 English: 0300 on 6120, 7270, 15190; 1230 on 13695, 15290; 1830 on 9445, 13695-LSB; 2200 on 6135-LSB, 7280, 9560, 9655 (TRT via Benno Klink, BC-DX)

**UK OGBANI** Latest audience research puts BBC first in world with an audience of 143 million worldwide at least once a week (Graham Mytton, Controller of Marketing, BBCWS, on VOA *Communications World*)

**USA** FCC granted WRMI second antenna toward NAM on Feb 26; unknown how long before on air (Marcel Rommerts, DSWCI *DX Window*)

Brother Stair heard on new 7445 around 1300, ID for WRMO (gh, OK) WRNO now authorized on 7455 at 0900-1600 (George Jacobs & Associates via George Thurman) *Originally on 7445 by mistake?-gh.*

It was a shock to read the report on KVOH in Feb MT. I have an engineer scheduled to take corrective action. Your report on spurious emissions is appreciated and the first complaint I've received. Our transmitters are very old and we look forward to modernizing them. In the meantime it is our policy to operate all of our equipment according to FCC regulations (Paul Johnson, General Manager, KVOH)

WINB good here, but on phone said only 15 kW, not 50 (Hans Johnson, CO, *DXing with Cumbre*) 15715, 11740, 11950

WVHA continued week to week with its bank balance dipping as low as \$200. The loan company agreed to refinance in early March at half the payment, \$36.5K, as announced on a Sabbath update with a constant high noise level on frequency and blanketing at least 20 kHz, probably caused by misadjusted satellite link, snow in the dish (gh)

Monitor Radio Int'l announced a new address for *Letterbox*, #9-52 past the hours on weekdays: Box 1524, Boston, MA 02117-1524 (Jim Moats, Dave Jeffery)

R. Free Asia added Korean in early March: 2200-2300 on 745, 7530, 7550, 9455-KHBI, 9650; 1530-1630 on 5855, 7520, 9980, 11600. Vietnamese at 1400-1500 also on 9930 which is KWHH Hawaii. Chinese at 2300-2400 added VOA Delano 11870; 1500-1600 added VOA-Delano 9805 (BC-DX) Extended to 1700 also 9805 (Art Blair, CA) 9980 is KHBN Palau (BC-DX) Only one audible here at 1530 (gh, OK) Richard Richter, head of RFA said Korean service would be "open format" including reading letters to relatives (source deleted by HCJB *DX Partyline*) RFA is aimed at spreading the decadent American way of life, ideology and culture, paralysing the national consciousness of Asian people, obliterating their national cultures (KCNA, Pyongyang, via BBCM) See also SAIPAN

Miami lawyer Herminio San Román, a Democratic Party activist, has taken over as head of the Office of Cuba Broadcasting, which includes Radio Martí (Karen Branch & Cynthia Corzo, Miami *Herald* via Mike Cooper)

Voice of America put out a 1997 wall calendar, "State Fairs—A American Tradition" with colorful shots of midways, etc. Unfortunately, Americans are not allowed to have it (gh) *Studio One*, which was a place for long-form productions, last aired Feb 16, but may come back as specials; replaced by *Study 38* Suns 1230, 1630, 2130 (VOA *Communications World*) *Checked it one week, heard silly little segments-gh.*

**WORLD OF RADIO** anticipated May schedule on WWCR: Thu 2030 1685, Sat 0530 5070, 1130 7435, 1300 15685, Sun 0730 5070, 0900 3210, 2330 070, Tue 1230 15685. In June, July and August the 2330 airing will be on 1260. After numerous complaints, WWCR agreed to provide its program schedule on website not only in tables but in text format (gh)

MW harmonics noted: 2480, WWZQ, Aberdeen MS at 1115-1125 wh 105.3 FM ID; 2680, WLDY, Ladysmith WI, 0328-0400, 1130-1200 very good ne day, gone the next (Don Moore, IA)

**ZAIRE** V. of the People, Bunia, heard on rebel-controlled 5066 transmitter at 0430-0500, 1500-1530; elsewhere still R. Candip (BBCM)

**ZAMBIA** HCJB is looking for a site in Africa; application has been pending a long time for a mid-sized SW station here, but progress is slow. Another missionary station, Christian Voice is already on the air; unlike its domestic target, HCJB's wiser serve many CAF countries and languages. Would sound like HCJB with general interest, not just religious programs. Another regional SW has been waiting for 5 yrs in a secret country. Several other possibilities for an HCJB outlet are pending (Roger Stubbe, HCJB *DX Partyline*)

*Until the Next, Best of DX and 73 de Glenn!*  
<http://hudson.idt.net/~khercht19/radio/shortwave/ghauser>



Gayle Van Horn

## 0001 UTC on 5890

LITHUANIA: Radio Vilnius. National and world news in Lithuanian, to folk music. Program repeat in English at 0030. (Eduardo Pazera Jr., Joao Pessoa, Paraiba, Brazil)

## 0020 UTC on 4419.4

PERU: Radio Bambamarca. Spanish. Station ID, "y son las ocho de la noche en Radio Bambamarca, su frecuencia lider." Evening messages to ID repeat. Peru's **Radio Tawauantisuyo** heard on 6173.8 at 0025. **Radio Nor Andina** heard on 4460.8 at 0050. (Pedro Arrunategui, Lima, Peru, *The Four Winds* via email).

## 0055 UTC on 11905

THAILAND: Radio Thailand. PGA and related American sports results. Station sign-off to Westminster chimes at 0100 introducing new language service. (Sue Wilden, Columbus, IN)

## 0140 UTC on 4566.4

PERU: Radio Gotas de Oro. Station ID and greetings to friends, including myself and Henry Klemetz in Bogota, Colombia. Additional Peruvians logged as: **Radio Quillabamba** 5025 at 1120; **Radio Tropical** 4935 at 1125; **Radio Chanchamayo** 4895.1 at 1140; **Radio La Hora** 4855.5 at 1158; **Radio Universal** 5767.2 at 1204; **Radio Apurimac** 5236.3 at 1207. (Arrunategui, Peru/TFW)

## 0229 UTC on 6090

ANGUILLA: University Network. Contemporary instrumentals to station break ID and mailing address: (P.O. Box 1, Los Angeles, CA 90053). Teachings from Romans and Doc's "unique" approach to tithing. "DOCNET" website: <<http://www.drgenescott.org>> 1-800-338-3030. (Sam Wright, Biloxi, MS)

## 0315 UTC on 3270

NAMIBIA: Radio Namibia/NBC. U.S. pops to news at 0400 closing with prayer. Noted on //3290 audible only in USB due to high noise level. (Lee Silvi, Mentor, OH, via email). *Anyone trying for a QSL? P.O. Box 321, Windhoek, 9000 Namibia. -ed.*

## 0400 UTC on 9745

ECUADOR: HCJB. News program. Not considered "DX" to the U.S. listener; however, HCJB had excellent coverage of the presidential and political crises. (Silvi, OH) Spanish service 0200 on 5860. (Wilden, OH)

## 0400 UTC on 3330

ZAMBIA: The Christian Voice. English announcer with local time check and national news closing with prayer. *Morning Show* to contemporary Christian pop music. (R.C. Hewitt, Quartzite, AZ)

## 0525 UTC on 7385

COSTA RICA: Radio for Peace Int'l. Easy-listening programming to donation request and address. (Terry Jones, Plankton, SD)

## 0558 UTC on 5070

USA: WWCR. *American Worldwide* program. (Jones, SD; Bob Fraser, Cohasset, MA)

## 0600 UTC on 3366

GHANA: GBC. Evening show with lottery numbers, local time checks, commercials with jingles and "Radio 2" ID. (Hewitt, AZ; Jones, SD)

## 0730 UTC on 3945

VANUATU: Radio Vanuatu. (Tentative). English/French programming including a British/Australian accented commercial for "healthy smile...healthy teeth". (Silvi, OH) *I'd bet this was Vanuatu, thanks for the log, not reported often. Station address: P.M.B. 927, Port Vila, Republic of Vanuatu. -ed.*

## 0816 UTC on 7175

RUSSIA: Radiostantzia Tikhyy Okean (Radio Pacific Ocean). This daily Russian-language broadcast for sailors in the Pacific, opens with chimes and "Gavorit Vladivostok," followed by a mix of news, fishery and shipping features, pop music, and telephone calls from listeners. Sign-off occurs at 0900 UTC. Coming as it does from the Russian Far East, this signal is quite strong in central California, and can be easily be found as the carrier is left on with "dead air" between Voice of Russia's English language sign-off at 0800 UTC and the Tikhyy Okean sign-on at 0816. (Rick Albright, Merced, CA via email)

## 0934 UTC on 11635

PHILIPPINES: FEBC/Radio Int'l. English monitored to 1007. Piano and orchestra music to religious sermon to 1005. Music pauses, announcement with address and ID as, "this is FEBC International." Fair/poor signal monitored in USB. (Giovanni Serra, Rome, Italy, TFW)

## 1004 UTC on 9700

NEW ZEALAND: Radio NZ Int'l. News coverage of the Pacific region.

(Wilden, IN) This frequency monitored to 1130. (Fraser, MA)

## 1140 UTC on 9860

AUSTRALIA: Radio Australia. Report on Australian/Vietnamese culture exchange //9580. (Fraser, MA; Wilden, IN)

## 1245 UTC on 11650

SWEDEN: Radio Sweden. *Sounds Nordic* show focusing on the continued search for the Loch Ness Monster. (Wilden, IN)

## 1505 UTC on 4925

INDONESIA: RRI-Jambi (Sumatra). Indonesian. News coverage on Sumatra and Java. Indo's logged as; **RRI-Ujung Pandang** (Sulawesi) 4753.2 at 1510; **RRI Bukittingi** (Sumatra) 3231.9 at 1655. (Walter Mola, Torino, Italy/TFW)

## 1700 UTC on 15320

ITALY: RAI. Italian broadcast to Africa. News, sports headlines, cultural program and music. RAI noted in Italian as; daily 1400-1430 on 15250/17780; daily 1830-1905 on 9675/11800; Sunday 1345-1700 on 17780. (Augustine Sabbatino, New York City, NY)

## 1856 UTC on 9955

SWITZERLAND: (Non). Radio Sparks relay via WRMI, Miami, FL. Pop/rock tunes to plenty of station IDs and QSL information/address. (P.O. Box 510, 04010 Basel, Switzerland). Music from pop group singing *Walking On a Milky Way* and *Its a Beautiful Life* from Swedish pop group Ace of Base. Great show, look for this one again June 28th. (Gayle Van Horn, Brasstown, NC)

## 2002 UTC on 7155

MOROCCO: Radio Free Europe (via Brieche). Programming to Europe in Serbo-Croat language. English ID break at 2003 to text on European politics. Beatles' tune *In My Life* to newscast and R&B tune *I'm So Hurt*. (Van Horn, NC)

## 2035 UTC on 5940

RUSSIA: Voice of Russia. Program *Moscow Yesterday and Today* featuring story on Ivan the Terrible's ordering the death of Metropolitan Church priest Philip. (Fraser, MA)

## 2100 UTC on 11715

MALI: China Radio Int'l. News on the return of Hong Kong to China. //15100 poor signal quality. (Fraser, MA; Jones, SD)

## 2100 UTC on 5970

CZECH REPUBLIC: Radio Free Europe (via Prague). Lithuanian. One hour of international and regional programming. (Pazera, Brazil) RFE heard on this frequency 2304-0000. (Stokes Swartz, Madison, WI, via email)

## 2100 UTC on 6070

CANADA: CPRX. Weather and traffic update. **Radio Canada Int'l** on 9805 at 2107, with national weather forecast to sports headlines and hockey scores. Feature with Jim Craig on //5925, 11945, 17820. (Jones, SD; Wilden, IN)

## 2117 UTC on 9615

RWANDA: Deutsche Welle relay. Story on waltzing in Vienna. (Wilden, IN) Rwanda DW noted on 15275 at 2100. (Swartz, WI)

## 2135 UTC on 9620

CUBA: Radio Havana. *Spotlight on the Americas* program featuring Costa Rica's economic struggles. (Fraser, MA) Programming noted 6180 at 2230. (Jones, SD)

## 2243 UTC on 7450.2

GREECE: Voice of Greece. Greek pop music vocals to IDs at 2250, 2301 with RTTY station interference. (Schwartz, WI; Wilden, IN)

## 2320 UTC on 9655

TURKEY: Voice of Turkey. *Another Province* show with Subah Province profiled. (Fraser, MA)

## 2340 UTC on 5012

DOMINICAN REPUBLIC: Radio Cristal Internacional. *Musical Dominicana* program to numerous IDs as; "Radio Cristal Internacional la voz de la Republica Dominicana." (Silvi, OH)

## 2350 UTC on 11795

NETHERLANDS ANTILLES: Deutsche Welle Antigua relay. German service of classical musical program. BBC World Service's Antigua relay noted on 5975 at 0130 discussing supernovas. (Fraser, MA)

Thanks to our contributors — Have you sent in YOUR logs?  
Send to **Gayle Van Horn**, c/o Monitoring Times (or e-mail [gayle@grove.net](mailto:gayle@grove.net))  
English broadcast unless otherwise noted.



### OLÉ!



Radio Mexico Internacional continues to delight DXers with a brisk QSL return rate. Juan Mort, the station manager, welcomes your correspondence and inquiries about Mexico in Spanish, English, Italian, or French. Send your report with one U.S. dollar, mint stamps of Mexico, or one IRC to: Apartado Postal 21-300, Codigo Postal 04021, Mexico City, DF Mexico. The station is also available via e-mail: [imer@mpsnet.com.mx](mailto:imer@mpsnet.com.mx).

From the Dallas-Ft. Worth airport comes word of a new Travelers Information Station (TIS) on 1640 and 1680 kHz, broadcasting 24 hours. These low powered radio transmitters broadcast travel information and points of interest. However, this unusual TIS station is transmitting at 60 watts! Send your reception report and return mint stamps to: Mr. Art Blair, P.O. Box 619428, Dallas-Ft. Worth Airport, TX 75261.

#### COASTAL STATION

IAR Rome Radio, 13011.0 kHz. Full data prepared QSL card stamped with station seal, signed by Pietro Tangioni, plus station schedule, business card and amateur QSL card (IK0OTG). Received in 356 days for an English report and one U.S. dollar. Station address: Telecom Italia, DCP/STDP-SGIR, Viale Europa 190, 00139 Roma, Italy. (Richard W. Parker, Rochester, NY)

#### DOMINICAN REPUBLIC

Radio Amanecer Internacional, 6025 kHz. Partial data *Certificado de Sinotonia* verification card with illegible signature. Received in 300 days for a Spanish report and one U.S. dollar. Station address: Apartado 1500, Santo Domingo, Dominican Republic. (Darren White, Hattiesburg, MS)

#### FM/MEDIUM WAVE

WRMA-FM 106.7 kHz. Full data letter signed by Haz Montana plus a station sticker. Received in 15 days for a Spanish FM report. Station address: 3191 Coral Way, Suite 100, Miami, FL 33145. (Jose Moura, Washington, DC)

WABC-AM 770 kHz. Full data station QSL card signed by Bill Krause. Received in 30 days for an English AM report. Station address: 2 Penn Plaza, New York City, NY 10121. (Moura, DC) *Musicroadio 770 WABC website: <http://musicradio.computer.net>.* -ed.

#### FRENCH POLYNESIA

RFO/Radio Tahiti, 15168 kHz. Full data station logo card unsigned, plus RFO sticker and coverage map. Received in 7 months for an English report, cassette tape, one U.S. dollar and local station bumper stickers. Station address: Boite Postal 125, Papeete, Tahiti. (Michael T. Prindle, New Suffolk, NY via mail) *QSL this station while you can...they plan to leave shortwave in the near future.* -ed.

#### JORDAN

Radio Jordan, 11970 kHz. Full data QSL card stamped with station's seal, signed by Jawad Zada. Program schedule and station decal enclosed. Received in 61 days for an English report and three IRCs. Station address: P.O. Box 909, Amman, Jordan. (White, MS)

#### MEXICO

Radio Mexico Internacional-XERMX, 9705 kHz. Oversized full data station logo card unsigned. Station sticker, program schedule, report form and large felt pennant enclosed. Personal letter in English from Juan Mort-Manager on station letterhead. Received in 26 days for an English report, mint stamps, souvenir postcard and self-addressed envelope (not used for reply). Station address: Apartado Postal 21-300, Codigo Postal 04021, Mexico City, DF Mexico. (Gayle Van Horn, Brasstown, NC; Prindle, NY)

#### MOROCCO

Radio Medi Un, 9575 kHz. Full data QSL card with illegible. Received in 241 days for a French report and two IRCs. Station address: Boite Postal No. 2055, Tangier, Morocco. (White, MS)

#### NON DIRECTIONAL BEACONS

ZLS-526 kHz. Stella Maris International Airport, Bahamas. Full data prepared QSL card returned with illegible signature of supervisor. Received in 10 days for an English utility report and mint stamp. Station address: FAA, Enroute SSC (Carib-

bean), 7500 N.W. 58th St., Miami, FL 33166. (Randy Stewart, Springfield, MO)

PP-513 kHz, Omaha, Nebraska. Full data QSL letter signed by James E. Owens-KG0QI. Received for a follow-up NDB report of CW beacon identification. Original report sent to Eppley Airfield. Station address: U.S. Dept. of Transportation, Federal Aviation Administration, Omaha Traccon, 100 Traccon Hill, Bellevue, NE 68005. (Hank Holbrook, Dunkirk, MD)

EEX-309 kHz, Swainsboro, Georgia. Full data prepared QSL card verified with illegible signature. Received for a NDB report of CW beacon identification. Station address: Emanuel County Airport, Swainsboro, GA 30401. (Holbrook, MD)

#### NORTH KOREA

Radio Pyongyang, 9977 kHz. Full data color scenery card unsigned plus a red and blue cloth pennant. Received in 72 days for an English report mailed while in Stuttgart, Germany. Station address: External Service, Korean Central Broadcasting Station, Pyongyang, Democratic People's Republic of Korea. (Frank Hillton, Charleston, SC)

#### SEYCHELLES

BBC Indian Ocean Relay Station, 11730 kHz. Full data letter on BBC station letterhead, signed by Nigel Bird. Received in 26 days for an English report and two IRCs. Station address: P.O. Box 448, Victoria, Mahe, Seychelles. (White, MS)

#### SHIP TRAFFIC

M/V Stewart J. Cort WY23931, 4077 kHz. Full data prepared QSL card returned as verified, plus photo of vessel. Received for an English utility report. Ship address: c/o Canal Station, Sault Ste. Marie, MI 49783. (Steve McDonald, Mayne Bay, BC Canada)

Sanko Express D5YA, 156.8/156.65 MHz (Tanker). Full data QSL letter received for an English utility report and one U.S. dollar. Ship address: Sanko Steamship Co., Ltd., Skin Yuracho Bldg., 9th Floor, 12-1, Yuraku-cho 1 Chome, Chiyoda-ku, Tokyo 100, Japan. (Holbrook, MD)

#### SOUTH AFRICA

Channel Africa, 15240 kHz. Full data QSL card signed by Kathy Otto, plus station sticker and frequency schedule. Received in 54 days for an English report. Station address: Sentech (Pty) Ltd., Shortwave Service, Private Bag X06, Honeydew 2040 South Africa. (Paul Jablonowski, Greenfield, WI) *Channel Africa station website: <http://www.sabc.co.za/units/chanaf/index.html>.* You may also send a reception report from your browser at: *<http://www.sentech.co.za/reception.html>* or email your report to: *otto@sentech.co.za.* Don't forget to visit Sentech's website: *<http://www.sentech.co.za>* -ed.

#### STANDARD FREQ/TIME SIGNAL STATIONS

YVTO, 5000 kHz. Full data station logo card plus station info sheet. Received in 115 days for a Spanish report and one U.S. dollar. Station address: Observatorio Cagigal, Apartado 6745, Armada 84-DHN, Caracas 10, Venezuela. (Albert Lozano, Wilkes-Barre, PA) *This station is not listed in the 1997 WRTVH.* -ed.

CHU, 3330 kHz. Partial data CHU card unsigned. Received in 14 days for an English report. Station address: National Research Council, Ottawa, Ontario, Canada K1A 0R6. (Sam Wright, Biloxi, MS)





## HOW TO USE THE SHORTWAVE GUIDE

### 1: Convert your time to UTC.

Eastern and Pacific Times are already converted to Coordinated Universal Time (UTC) at the top of each page. The rule is: convert your local time to 24-hour format; add (during Daylight Savings Time) 4, 5, 6, or 7 hours for Eastern, Central, Mountain or Pacific Times, respectively.

Note that all dates, as well as times, are in UTC; for example, a show which might air at 0030 UTC Sunday will be heard on Saturday evening in America (8:30 pm Eastern, 5:30 pm Pacific).

### 2: Choose a program or station you want to hear.

Some selected programs appear on the lower half of the page for prime listening hours—space does not permit 24-hour listings.

Occasionally program listings will be followed by "See X 0000." This information indicates that the program is a rerun, and refers to a previous summary of the program's content. The letter stands for a day of the week, as indicated below, and the four digits represent a time in UTC.

S: Sunday T: Tuesday H: Thursday A: Saturday  
M: Monday W: Wednesday F: Friday

### 3: Find the frequencies for the program or station you want to hear.

Look at the page which corresponds to the time you will be listening. Comprehensive frequency information for English broadcasts can be found at the top half of the page. All frequencies are in kHz.

The frequency listing uses the same day codes as the program listings; if a broadcast is not daily, those day codes will appear before the

station name. Irregular broadcasts are indicated "tent" and programming which includes languages besides English are coded "vl" (various languages).

### 4: Choose the most promising frequencies for the time, location and conditions.

Not all stations can be heard and none all the time on all frequencies. To help you find the most promising frequency, we've included information on the target area of each broadcast. Frequencies beamed toward your area will generally be easier to hear than those beamed elsewhere, even though the latter will often still be audible. Every frequency is followed by one of these target codes:

am: The Americas	as: Asia
na: North America	au: Australia
ca: Central America	pa: Pacific
sa: South America	va: various
eu: Europe	do: domestic broadcast
af: Africa	om: omnidirectional
me: Middle East	

Consult the propagation charts. To further help you find the right frequency, we've included charts at the back of this section which take into account conditions affecting the audibility of shortwave broadcasts. Simply pick out the region in which you live and find the chart for the region in which the station you want to hear is located. The chart indicates the optimum frequencies for a given time in UTC.

## RADIO PROGRAMS

By JIM FRIMMEL

### Sundays

0027 Radio Exterior de Espana: "Distance Unknown"  
0110 HCJB (am): "DX Partyline"  
0127 Radio Exterior de Espana: "Distance Unknown"  
0200 WWCR #3 (Tennessee): "Spectrum"  
0200 Radio For Peace Intl: "World of Radio"  
0234 Radio Havana Cuba: "DXers Unlimited"  
0245 Radio Romania Intl: "DX Mailbag"  
0258 Vatican Radio: "On-the-Air"  
0315 Voice of Turkey: "DX Corner" (biweekly)  
0400 AWR-Europe (Slovakia): "Wavescan"  
0410 Australia, Radio: "Feedback"  
0410 HCJB (am): "DX Partyline"  
0430 Australia, Radio: "The Media Report"  
0434 Radio Havana Cuba: "DXers Unlimited"  
0500 AWR-Europe (Slovakia): "Wavescan"  
0505 WWCR #3 (Tennessee): "Ham Radio and More"  
0508 Vatican Radio: "On-the-Air"  
0527 Radio Exterior de Espana: "Distance Unknown"  
0610 Australia, Radio: "Feedback"  
0634 Radio Havana Cuba: "DXers Unlimited"  
0635 Radio Vlaanderen Intl: "Radio World"  
0730 WWCR #3 (Tennessee): "World of Radio"  
0830 Radio Korea: "Shortwave Feedback"  
0900 Radio For Peace Intl: "World of Radio"  
0900 WWCR #1 (Tennessee): "World of Radio"  
0910 Australia, Radio: "Feedback"  
0930 Australia, Radio: "The Media Report"  
1040 Radio Korea: "Shortwave Feedback"  
1100 AWR Latin America: "Wavescan"  
1230 Radio Korea: "Shortwave Feedback"  
1235 Radio Vlaanderen Intl: "Radio World"  
1240 Radio Korea: "Shortwave Feedback"  
1352 Vatican Radio: "On-the-Air"  
1630 WHRI (Angel 2): "DXing with Cumbre"  
1630 Radio Korea: "Shortwave Feedback"  
1805 Radio Vlaanderen Intl: "Radio World"  
1830 KWHR (Hawaii): "DXing with Cumbre"  
1930 Radio Korea: "Shortwave Feedback"  
1930 Australia, Radio: "The Media Report"  
1940 Radio Korea: "Shortwave Feedback"

2010 Radio Korea: "Shortwave Feedback"  
2100 AWR-Europe (Slovakia): "Wavescan"  
2105 Radio Vlaanderen Intl: "Radio World"  
2113 Radio Budapest Intl: "Radio Budapest DX Show"  
2130 Radio Korea: "Shortwave Feedback"  
2145 Radio Bulgaria: "Radio Bulgaria Calling"  
2200 WHRI (Angel 2): "DXing with Cumbre"  
2205 WWCR #3 (Tennessee): "Ham Radio and More"  
2215 AWR-Europe (Slovakia): "Wavescan"  
2300 AWR Latin America: "DXing with Cumbre"  
2300 KSDA (Guam): "Wavescan"  
2300 Radio For Peace Intl: "World of Radio"  
2315 WWCR #3 (Tennessee): "Ask WWCR"  
2330 WWCR #3 (Tennessee): "World of Radio"  
2335 Radio Vlaanderen Intl: "Radio World"

### Monday

0100 KWHR (Hawaii): "DXing with Cumbre"  
0230 Radio Korea: "Shortwave Feedback"  
0245 Radio Budapest Intl: "Radio Budapest DX Show"  
0330 KWHR (Hawaii): "DXing with Cumbre"  
0430 Radio New Zealand Intl: "Mailbox" (biweekly)  
0445 Radio Bulgaria: "Radio Bulgaria Calling"  
0500 WWCR #3 (Tennessee): "Ask WWCR"  
0700 Radio For Peace Intl: "World of Radio"  
0805 WWCR #1 (Tennessee): "Spectrum"  
0905 WWCR #1 (Tennessee): "Ham Radio and More"  
1040 All India Radio: "DX-ers Corner" (2/4)  
1115 Radio Bulgaria: "Radio Bulgaria Calling"  
1350 Radio Romania Intl: "For Radio Amateurs"  
1435 All India Radio: "DX-ers Corner" (2/4)  
1520 Radio Romania Intl: "For Radio Amateurs"  
1615 KTWB (Guam): "Pacific DX Report"  
1815 Radio Tallinn: "Radio Estonia DX Program"  
1840 All India Radio: "DX-ers Corner" (2/4)  
1950 Radio Romania Intl: "For Radio Amateurs"  
2100 WWCR #1 (Tennessee): "Ask WWCR"  
2130 All India Radio: "DX-ers Corner" (2/4)  
2150 Radio Romania Intl: "For Radio Amateurs"  
2350 Radio Romania Intl: "For Radio Amateurs"

### Tuesdays

0255 Radio Romania Intl: "For Radio Amateurs"  
0900 KTWB (Guam): "Pacific DX Report"  
1146 Radio Sweden: "MediaScan" (1/3)  
1210 AWR Latin America: "Wavescan"  
1230 WWCR #1 (Tennessee): "World of Radio"  
1246 Radio Sweden: "MediaScan" (1/3)  
1330 WRMI (Florida): "Wavescan"  
1346 Radio Sweden: "MediaScan" (1/3)  
1355 FEBC (Philippines): "DX Dial"  
1746 Radio Sweden: "MediaScan" (1/3)  
1900 Radio For Peace Intl: "World of Radio"  
1946 Radio Sweden: "MediaScan" (1/3)  
1950 Polish Radio: "Polish Radio DX Club"  
2139 Radio Havana Cuba: "DXers Unlimited"  
2146 Radio Sweden: "MediaScan" (1/3)  
2239 Radio Havana Cuba: "DXers Unlimited"  
2340 All India Radio: "DX-ers Corner" (2/4)

### Wednesdays

0135 Radio Havana Cuba: "DXers Unlimited"  
0146 Radio Sweden: "MediaScan" (1/3)  
0246 Radio Sweden: "MediaScan" (1/3)  
0300 Radio For Peace Intl: "World of Radio"  
0335 Radio Havana Cuba: "DXers Unlimited"  
0346 Radio Sweden: "MediaScan" (1/3)  
0535 Radio Havana Cuba: "DXers Unlimited"  
0830 HCJB (eu): "Ham Radio Today"  
0930 HCJB (pac): "Ham Radio Today"  
1000 Radio For Peace Intl: "World of Radio"  
1315 FEBC (Philippines): "DX Dial"  
1330 WRMI (Florida): "Wavescan"  
1720 Polish Radio: "Polish Radio DX Club"  
1917 Radio Budapest Intl: "Radio Budapest DX Show"  
1920 Argentina, RAE: "DXers Special"  
1930 HCJB (eu): "Ham Radio Today"

### Thursdays

0117 Radio Budapest Intl: "Radio Budapest DX Show"  
0130 HCJB (am): "Ham Radio Today"  
0239 Argentina, RAE: "DXers Special"  
0430 HCJB (am): "Ham Radio Today"  
0754 Radio Netherlands Intl: "Media Network"

0830 Radio New Zealand Intl: "Mailbox" (biweekly)  
0953 Radio Netherlands Intl: "Media Network"  
1153 Radio Netherlands Intl: "Media Network"  
1220 Polish Radio: "Polish Radio DX Club"  
1330 WRMI (Florida): "Wavescan"  
1352 Radio Netherlands Intl: "Media Network"  
1753 Radio Netherlands Intl: "Media Network"  
1952 Radio Netherlands Intl: "Media Network"  
2030 WWCR #1 (Tennessee): "World of Radio"

### Fridays

0053 Radio Netherlands Intl: "Media Network"  
0253 Radio Netherlands Intl: "Media Network"  
0453 Radio Netherlands Intl: "Media Network"  
1330 WRMI (Florida): "Wavescan"  
1400 WRMI (Florida): "Wavescan"  
1930 Radio New Zealand Intl: "Mailbox" (biweekly)  
1942 Radio Bulgaria: "Radio Bulgaria Calling"  
2000 WWCR #1 (Tennessee): "Ask WWCR"  
2000 Radio For Peace Intl: "World of Radio"  
2210 Australia, Radio: "Feedback"

(Continued on page 102)

Media Roundup, Radio Japan's DX/Media program, was discontinued in April. The monthly "Receiver Test Report" heard in that program and hosted by Lawrence Magne and Ian MacFarland will be sorely missed.



## FREQUENCIES

0000-0100 irreg	Anguilla, Caribbean Beacon	6090am				0100-0200 irreg	Anguilla, Caribbean Beacon	6090am			
0000-0100	Australia, Radio	13605pa	15415as	15510as	17750as	0100-0200	Australia, Radio	9660pa	11640as	12080pa	13605pa
0000-0100 vl	Australia, VL8K Katherine	5025do						13755pa	15365pa	15415as	15510as
0000-0100 vl	Australia, VL8T Tent Crk	4910do						17715as	17750pa	17795pa	17860pa
0000-0015	Cambodia, Natl Voice of	11940as						17880pa			
0000-0100	Canada, CBC N Quebec Svc	9625do				0100-0200 vl	Australia, VL8K Katherine	5025do			
0000-0100	Canada, CFCX Montreal	6005do				0100-0200 vl	Australia, VL8T Tent Crk	4910do			
0000-0100	Canada, CFRX Toronto	6070do				0100-0200	Canada, CBC N Quebec Svc	9625do			
0000-0100	Canada, CFVP Calgary	6030do				0100-0200	Canada, CFCX Montreal	6005do			
0000-0100	Canada, CHNX Halifax	6130do				0100-0200	Canada, CFRX Toronto	6070do			
0000-0100	Canada, CKZN St John's	6160do				0100-0200	Canada, CFVP Calgary	6030do			
0000-0100	Canada, CKZU Vancouver	6160do				0100-0200	Canada, CHNX Halifax	6130do			
0000-0100	China, China Radio Intl	9710na	11695na	11760na		0100-0200	Canada, CKZN St John's	6160do			
0000-0100	Costa Rica, RF Peace Intl	6205am	7385am			0100-0200	Canada, CKZU Vancouver	6160do			
0000-0010	Croatia, Croatian Radio	5895eu	7165eu			0100-0200	Canada, R Canada Intl	9535am	9755am	11715am	13670am
0000-0027	Czech Rep, Radio Prague	6200na	7345na			0100-0200	Costa Rica, RF Peace Intl	6205am	7385am		
0000-0100	Ecuador, HCJB	9745am	21455am			0100-0110	Croatia, Croatian Radio	5895eu	7165eu		
0000-0030	Egypt, Radio Cairo	9900na				0100-0200	Cuba, Radio Havana	6000na	9820na	9830na	
0000-0015 vl	Ghana, Ghana Broadc Corp	3366do	4915do			0100-0127	Czech Rep, Radio Prague	5930na	7345na		
0000-0045	India, All India Radio	7150as	9705as	9950as	11620as	0100-0200	Ecuador, HCJB	9745am	21455am		
0000-0030	Kazakhstan, Radio Almaty	6230eu				0100-0150	Germany, Deutsche Welle	6040na	6085na	6145na	6185na
0000-0100	Lebanon, Voice of Hope	9960va						9535na	9615na	9640na	11810na
0000-0100	Liberia, LCN/R Liberia Int	5100do				0100-0115	Ghana, Ghana Broadc Corp	3366do	4915do		
0000-0100	Malaysia, Radio	7295do				0100-0130	Hungary, Radio Budapest	5905na	9840na		
0000-0100	Malaysia, RTM Kuching	7160do				0100-0200	Indonesia, Voice of	9525na			
0000-0100	Netherlands, Radio	6020na	6165na	9845na		0100-0200 t th	Ireland, W Coast R Ireland	5910am			
0000-0100	New Zealand, R NZ Intl	15115pa				0100-0110	Italy, RAI Intl	6010na	9675na	11800na	
0000-0050	North Korea, R Pyongyang	11335na	13760na	15130na		0100-0200	Japan, R Japan/NHK World	11790as	11840as	11860as	11890na
0000-0100 vl	Papua New Guinea, NBC	9675do						13630am	13650as	15475as	17685as
0000-0100	Russia, Voice of Russia WS	7105eu	7125na	7240na	9550na			17810as			
0000-0030 mtwhfa	Serbia, Radio Yugoslavia	6195na	7115na			0100-0200	Lebanon, Voice of Hope	9960va			
0000-0100	Spain, R Exterior Espana	6055am				0100-0200	Liberia, LCN/R Liberia Int	5100do			
0000-0030	Thailand, Radio	9680af				0100-0200 smtwh	Malaysia, Radio	7295do			
0000-0100	Ukraine, R Ukraine Intl	5915na	7150na	7160na	7205na	0100-0125	Netherlands, Radio	6020na	6165na	9845na	
		7290na				0100-0200	Netherlands, Radio	5905as	7305as		
0000-0100	United Kingdom, BBC WS	5965as	5970am	5975am	6175am	0100-0200	New Zealand, R NZ Intl	15115pa			
		6195as	9410as	9590am	11750sa	0100-0200 vl	Papua New Guinea, NBC	9675do			
		11955as	15310as			0100-0200	Philippines, FEBC/R Intl	15450as			
0000-0045	United Kingdom, BBC WS	3915as				0100-0200	Russia, Voice of Russia WS	5930na	7105na	7125na	7345na
0000-0030	United Kingdom, BBC WS	7110as	9580as	11945as	15280as			9550na	9580na	12030na	13665na
0000-0100	USA, KAIJ Dallas TX	5810am				0100-0200 mtwhfa	Russia, Voice of Russia WS	5920na			
0000-0100	USA, KTVN Salt Lk City UT	7510am				0100-0130	Serbia, Radio Yugoslavia	6195na	7130na		
0000-0100	USA, KWHR Naalehu HI	17510as				0100-0130	Slovakia, R Slovakia Intl	5930na	7300na	9440na	
0000-0100	USA, Monitor Radio Intl	7535na	9430sa	15665as	15725as	0100-0200	Spain, R Exterior Espana	6055am			
0000-0100	USA, Voice of America	5990af	7215as	9890as	11760as	0100-0200	Sri Lanka, Sri Lanka BC	9730as			
		15290am	17735am	17820as		0100-0130	Switzerland, Swiss R Intl	6135na	9885na	9905ca	
0000-0100 twhfa	USA, Voice of America	5995am	6130am	7405am	9455am	0100-0200	United Kingdom, BBC WS	5965as	5970sa	5975am	6175am
		9775am	11695ca	13740am				6195as	9410as	9590am	9605as
		13845am	6890na	7425na				11750am	11955as	15280as	15310as
0000-0100	USA, WEWN Birmingham AL	5825eu						15360as			
0000-0100	USA, WGTG McCaysville GA	5085am				0100-0200	USA, KAIJ Dallas TX	5810am			
0000-0100	USA, WHRI Noblesville IN	5745am				0100-0200	USA, KTVN Salt Lk City UT	7510am			
0000-0100	USA, WINB Red Lion PA	11950am				0100-0200	USA, KVOH Los Angeles CA	9975am			
0000-0100	USA, WJCR Upton KY	7490na				0100-0200	USA, KWHR Naalehu HI	17510au			
0000-0100 m	USA, WRMI/R Miami Intl	9955am				0100-0200	USA, Monitor Radio Intl	7355na	9430am		
0000-0100	USA, WRNO New Orleans LA	7355am				0100-0200	USA, Voice of America	7115as	7205as	9455am	9740as
0000-0100	USA, WWCR Nashville TN	2390am	3215am	5070am	5935am			11705as	15250as	15370as	17740as
		13845am						21550as			
0000-0045	USA, WYFR Okeechobee FL	6065na	9505ca			0100-0200 twhfa	USA, Voice of America	5995am	6130am	7405am	9775am
0030-0100	Australia, Radio	9660pa	11640as	12080pa	13755pa			13740am			
		15365pa	17795pa	17860pa	17880pa	0100-0200	USA, WEWN Birmingham AL	5825eu	6890na	7425na	7520sa
0030-0055	Austria, R Austria Intl	9655na				0100-0200	USA, WGTG McCaysville GA	5085am			
0030-0100	Lithuania, Radio Vilnius	5910na				0100-0200	USA, WHRI Noblesville IN	5745am			
0030-0100	Netherlands, Radio	5905as	9855na	11655na		0100-0200	USA, WINB Red Lion PA	11950am			
0030-0100	Sri Lanka, Sri Lanka BC	9730as				0100-0200	USA, WJCR Upton KY	7490na			
0030-0100	Thailand, Radio	9655as	11905as			0100-0200 m-f/vl	USA, WRMI/R Miami Intl	9955am			
0035-0040	India, All India Radio	4860do	5050do	7110do	11830do	0100-0200	USA, WRNO New Orleans LA	7355am			
		11870do				0100-0200 mtwhf	USA, WVHA Greenbush ME	5850eu			
0050-0100	Italy, RAI Intl	6010na	9675na	11800na		0100-0200	USA, WWCR Nashville TN	2390am	3215am	5070am	
						0100-0200	USA, WYFR Okeechobee FL	6065na	9505na		
						0100-0130	Uzbekistan, R Tashkent	5040eu	7105eu	7285eu	
						0100-0126	Vietnam, Voice of	5940na			
						0130-0150	Greece, Voice of	6260na	7450na	9425na	
						0130-0200 s/vl	Malta, VO Mediterranean	15550as	17570au		
						0130-0200	Netherlands, Radio	5905as	9855as	11655as	
						0130-0200	Sweden, Radio	9435as			
						0130-0200 s	Sweden, Radio	7290am			
						0130-0156	Vietnam, Voice of	5940na			
						0140-0200	Vatican State, Vatican R	5980as	7335as		
						0145-0200	Albania, R Tirana Intl	6115na	7160na		
						0145-0200	USA, WYFR Okeechobee FL	9355eu			

## International Callsign Directory

The most exhaustive list of tactical callsigns and their identifications ever assembled for shortwave and scanner listeners in a massive 250 page directory!

**Now only \$9.95 plus \$6 UPS**  
**Order today from**  
**Grove Enterprises**



## FREQUENCIES

0200-0300 irreg	Anguilla, Caribbean Beacon	6090am			
0200-0300 1-th/vl	Argentina, RAE	11710am			
0200-0300	Australia, Radio	13605pa	13755pa	15415as	15510as
		17715as	17750pa	17795pa	
0200-0300 vl	Australia, VL8K Katherine	5025do			
0200-0300 vl	Australia, VL8T Tent Crk	4910do			
0200-0300	Canada, CBC N Quebec Svc	9625do			
0200-0300	Canada, CFCX Montreal	6005do			
0200-0300	Canada, CFRX Toronto	6070do			
0200-0300	Canada, CFVP Calgary	6030do			
0200-0300	Canada, CHNX Halifax	6130do			
0200-0300	Canada, CKZN St John's	6160do			
0200-0300	Canada, CKZU Vancouver	6160do			
0200-0300 as	Canada, R Canada Intl	6120am	9535am	9755am	13670am
0200-0300	Costa Rica, RF Peace Intl	6205am	7385am		
0200-0210	Croatia, Croatian Radio	5895eu	7165eu		
0200-0300	Cuba, Radio Havana	6000na	9820na	9830na	
0200-0300	Ecuador, HCJB	9745am	21455am		
0200-0300	Egypt, Radio Cairo	9475na			
0200-0250	Germany, Deutsche Welle	7285as	9615as	9690as	11945as
		11965as	12045as		
0200-0300 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do	
0200-0300	Lebanon, Voice of Hope	9960va			
0200-0300 smtwh	Malaysia, Radio	7295do			
0200-0230 s/vl	Malta, VO Mediterranean	15550as	17570au		
0200-0300	Netherlands, Radio	9855as	11655as		
0200-0300	New Zealand, R NZ Intl	15115pa			
0200-0230 m	Norway, Radio Norway Intl	7465na	9560na		
0200-0300 vl	Papua New Guinea, NBC	9675do			
0200-0300	Philippines, FEBC/R Intl	15450as			
0200-0300	Romania, R Romania Intl	5990na	6155na	9510na	9570na
		11940na			
0200-0300	Russia, Voice of Russia WS	5930na	5940na	6150na	7105na
		7125na	7175na	7345na	9580na
0200-0300 mtwhfa	Russia, Voice of Russia WS	5920na			
0200-0300	Slovakia, Adv World Radio	11610as			
0200-0300	South Korea, R Korea Intl	7275as	11725am	11810am	15575am
0200-0300	Sri Lanka, Sri Lanka BC	9730as			
0200-0300	Taiwan, VO Free China	5950na	7130as	9680na	11740ca
		11825as	15345as		
0200-0300	Ukraine, R Ukraine Intl	5915na	7150na	7180na	
0200-0300	United Kingdom, BBC WS	5970sa	5975as	6135af	6175am
		6195eu	9410va	9605as	11955as
		15280as	15310as	15360as	
0200-0230	United Kingdom, BBC WS	9590am	9915am		
0200-0300	USA, KAIJ Dallas TX	5810am			
0200-0300	USA, KTVN Salt Lk City UT	7510am			
0200-0300	USA, KVOH Los Angeles CA	9975am			
0200-0300	USA, KWHR Naalehu HI	17510au			
0200-0300	USA, Monitor Radio Intl	5850na	7535am		
0200-0300	USA, Voice of America	7115as	7205as	9740as	11705as
		15250as	1537as	17740as	21550as
0200-0300	USA, WEWN Birmingham AL	5825eu	6890na	7425na	
0200-0300	USA, WGTG McCaysville GA	5085am			
0200-0300	USA, WHRI Noblesville IN	5760am	7315am		
0200-0300	USA, WINB Red Lion PA	11950am			
0200-0300	USA, WJCR Upton KY	7490na			
0200-0300 m	USA, WRMI/R Miami Intl	9955am			
0200-0300	USA, WRNO New Orleans LA	7355am			
0200-0300	USA, WWCR Nashville TN	2390am	3215am	5070am	5935am
0200-0300	USA, WYFR Okeechobee FL	6065na	9505na		
0200-0226	Vietnam, Voice of	5940na			
0215-0225	Nepal, Radio	7165do			
0230-0300	Albania, R Tirana Intl	6140na	7160na		
0230-0259	Austria, R Austria Intl	6015na	9655na	9870sa	13730sa
0230-0300	Hungary, Radio Budapest	6195na	9840na		
0230-0300	Netherlands, Radio	5905as	7305as	9855as	11655as
0230-0300 vl	Philippines, R Pilipinas	11885me	15120me	15270me	
0230-0300	United Kingdom, BBC WS	7325am	9895am		
0230-0256	Vietnam, Voice of	5940na			
0230-0300 vl	Zambia, R Zambia/ZNBC 2	6165do			
0245-0300	India, All India Radio	3945do	6045do	7110do	11830do
		15135do			
0245-0300 vl	Mozambique, R Mozambique	4855do			
0250-0300 sf	Greece, Voice of	6260na	7450na	9425na	
0250-0300	Vatican State, Vatican R	6095na	7305na		
0255-0300 vl	Zambia, R Zambia/ZNBC 1	4910do			

0300-0400 irreg	Anguilla, Caribbean Beacon	6090am			
0300-0400	Australia, Radio	13605pa	13755pa	15415as	15510as
		17750pa	17795pa		
0300-0400 vl	Australia, VL8K Katherine	5025do			
0300-0400 vl	Australia, VL8T Tent Crk	4910do			
0300-0400 vl	Canada, CBC N Quebec Svc	9625do			
0300-0400	Canada, CFCX Montreal	6005do			
0300-0400	Canada, CFRX Toronto	6070do			
0300-0400	Canada, CFVP Calgary	6030do			
0300-0400	Canada, CHNX Halifax	6130do			
0300-0400	Canada, CKZN St John's	6160do			
0300-0400	Canada, CKZU Vancouver	6160do			
0300-0400	China, China Radio Intl	9690am	9710am	11695am	
0300-0400 vl	Costa Rica, Faro del Carib	5055do			
0300-0400	Costa Rica, RF Peace Intl	6205am	7385am		
0300-0310	Croatia, Croatian Radio	5895eu	7165eu		
0300-0400	Cuba, Radio Havana	6000na	9820na	9830na	
0300-0327	Czech Rep, Radio Prague	7345as			
0300-0400	Ecuador, HCJB	9745am	21455am		
0300-0330	Egypt, Radio Cairo	9475na			
0300-0350	Germany, Deutsche Welle	5960na	6045na	6185na	9615na
0300-0400	Guatemala, Radio Cultural	3300do			
0300-0400 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do	
0300-0400	Lebanon, Voice of Hope	9960va			
0300-0400 vl	Lesotho, Radio Lesotho	4800do			
0300-0400 vl	Malaysia, RTM Kuching	7160do			
0300-0400 s/vl	Malta, VO Mediterranean	15550as	17570au		
0300-0330	Mexico, Radio Mexico Intl	9705na			
0300-0325	Netherlands, Radio	9855as	11655as		
0300-0400	New Zealand, R NZ Intl	15115pa			
0300-0400 vl	Papua New Guinea, NBC	9675do			
0300-0330 vl	Philippines, R Pilipinas	11885as	15120na	15270as	
0300-0400	Russia, Voice of Russia WS	5930na	6150na	7125na	7175na
		7345na	9580na		
0300-0400 mtwhfa	Russia, Voice of Russia WS	5920na			
0300-0355	S Africa, Channel Africa	3220af	5955af		
0300-0400	Sri Lanka, Sri Lanka BC	9730as			
0300-0400	Taiwan, VO Free China	5950na	9680na	11745as	11825as
		15345as			
0300-0330	Thailand, Radio	9655na	11890na	11905na	
0300-0400	Turkey, Voice of	6120eu	7270na	15190eu	
0300-0315 mtwhf	Uganda, Radio	4976do			
0300-0400	Ukraine, R Ukraine Intl	5915na	7150na	9550na	
0300-0330	United Kingdom, BBC WS	5970sa	6135af	6175am	7325am
		9895am	15360as		
0300-0400	United Kingdom, BBC WS	3255af	5975am	6005af	6180eu
		6190af	6195va	9410eu	9600af
		9605as	9895am	11760as	12095af
		15310as	17790as	21660as	
0300-0400	USA, KAIJ Dallas TX	5810am			
0300-0400	USA, KTVN Salt Lk City UT	7510am			
0300-0400	USA, KVOH Los Angeles CA	9975am			
0300-0400	USA, KWHR Naalehu HI	17510au			
0300-0400	USA, Monitor Radio Intl	5850na	7535af		
0300-0400	USA, Voice of America	6035af	6080af	7105af	7290af
		7340af	7415af	9575af	9885af
0300-0330 smtwh	USA, Voice of America	4960af			
0300-0400	USA, WEWN Birmingham AL	5825eu	6890na	7425na	
0300-0400	USA, WGTG McCaysville GA	5085am			
0300-0400	USA, WHRI Noblesville IN	5760am	7315am		
0300-0400	USA, WJCR Upton KY	7490na			
0300-0400	USA, WRNO New Orleans LA	7355am			
0300-0400	USA, WWCR Nashville TN	2390am	3215am	5070am	5935am
0300-0400	USA, WYFR Okeechobee FL	9985af			
0300-0345	USA, WYFR Okeechobee FL	6065na	9505na		
0300-0310	Vatican State, Vatican R	6095na	7305na		
0300-0400 vl	Zambia, R Zambia/ZNBC 1	4910do			
0300-0400 vl	Zambia, R Zambia/ZNBC 2	6165do			
0300-0400 vl	Zimbabwe, Zimbabwe BC	3396do			
0310-0340	Vatican State, Vatican R	7360af			
0315-0400 m	USA, WRMI/R Miami Intl	9955am			
0330-0357	Czech Rep, Radio Prague	9480me	11600as		
0330-0355 mtwhf	Moldova, R Moldova Intl	7520eu			
0330-0400	Slovakia, Adv World Radio	9465af			
0330-0400	Sweden, Radio	9430na			
0330-0430	Tanzania, Radio	5050af			
0330-0400	UAE, Radio Dubai	13665na	15400eu	21485na	
0330-0400	United Kingdom, BBC WS	6175am	9610af	11730af	11955as
		15280as			
0335-0355 vl	India, All India Radio	7110do	11830do	15135do	
0340-0350	Greece, Voice of	6260na	7450na	9425na	
0345-0400 irreg	Burundi, Radio Nationale	6140do			
0345-0400	Tajikistan, Radio Dushanbe	4975as	9905as		
0345-0400 as	Uganda, Radio	4976do			
0356-0400	Zambia, Christian Voice	3330af	6065af		



## FREQUENCIES

0400-0500 irreg	Anguilla Caribbean Beacon	6090am				0500-0600 irreg	Anguilla Caribbean Beacon	6090am			
0400-0500	Australia, Radio	11880pa	13605as	15240pa	15415as	0500-0600	Australia, Radio	13605as	15510as	15530as	17795pa
		17750as	17795pa			0500-0600 vl	Australia, VL8K Katherine	5025do			
0400-0500 vl	Australia, VL8K Katherine	5025do				0500-0600 vl	Australia, VL8T Tent Crk	4910do			
0400-0500 vl	Australia, VL8T Tent Crk	4910do				0500-0600	Australia, Defense Forces R	13525as			
0400-0500	Bulgaria, Radio	9485na	11720na			0500-0600	Canada, CFCX Montreal	6005do			
0400-0500 vl	Canada, CBC N Quebec Svc	9625do				0500-0600	Canada, CFRX Toronto	6070do			
0400-0500	Canada, CFCX Montreal	6005do				0500-0600	Canada, CFVP Calgary	6030do			
0400-0500	Canada, CFRX Toronto	6070do				0500-0600	Canada, CHNX Halifax	6130do			
0400-0500	Canada, CFVP Calgary	6030do				0500-0600	Canada, CKZU Vancouver	6160do			
0400-0500	Canada, CHNX Halifax	6130do				0500-0600	China, China Radio Intl	9650am			
0400-0500	Canada, CKZU St John's	6160do				0500-0600	Costa Rica, Adv World R	5030ca	6150ca	9725ca	
0400-0500	Canada, CKZU Vancouver	6160do				0500-0600	Costa Rica, RF Peace Intl	6205am	7385am		
0400-0430	Canada, R Canada Intl	9715me	11835me	15275me		0500-0600	Cuba, Radio Havana	6000na	9830na		
0400-0500	China, China Radio Intl	9560am				0500-0600	Ecuador, HCJB	9745am	21455am		
0400-0500	Costa Rica, RF Peace Intl	6205am	7385am			0500-0550	Germany, Deutsche Welle	6120na	6145na	6185na	9650na
0400-0500 vl	Cuba, Radio Havana	6000na	9820na	9830na		0500-0600 vl	Italy, IRRS	3985va			
0400-0500	Cyprus, BRT International	9745am	21455am			0500-0600	Japan, R Japan/NHK World	6110na	6150eu	9835na	11740as
0400-0500	Ecuador, HCJB	9745am	21455am					11910am	11920na	17810as	
0400-0450	Germany, Deutsche Welle	5990af	6015af	7225af	9565af	0500-0530	Japan, R Japan/NHK World	13630na	15230na		
		11765af				0500-0600 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do	
0400-0500 twrha	Guatemala, Radio Cultural	3300do				0500-0600	Lebanon, Voice of Hope	9960va			
0400-0415	Israel, Kol Israel	7465na	9435na	17545af		0500-0505	Lesotho, Radio Lesotho	4800do			
0400-0500 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do		0500-0600	Liberia, LCN/R Liberia Int	5100do			
0400-0500	Lebanon, Voice of Hope	9960va				0500-0510 mtwhf	Malawi, MBC	3380do			
0400-0430 s/vl	Malta, VO Mediterranean	15550as	17570au			0500-0600	Malaysia, Voice of	6175as	9750as	15295au	
0400-0430 m-a/vl	Mexico, Radio Mexico Intl	9705na				0500-0525	Netherlands, Radio	5995na	6165na	9590na	
0400-0458	New Zealand, R NZ Intl	15115pa				0500-0600	New Zealand, R NZ Intl	9795pa			
0400-0450	North Korea, R Pyongyang	15180as	15230as	17765as		0500-0505	Nigeria, FRCN/Radio	3326do	4770do	4990do	
0400-0430 m	Norway, Radio Norway Intl	7485na				0500-0600 vl	Papua New Guinea, NBC	9675do			
0400-0500 vl	Papua New Guinea, NBC	9675do	6155na	9510na	9570na	0500-0600	Russia, Voice of Russia WS	5905na	5920na	5930na	6150na
0400-0430	Romania, R Romania Intl	5990na	6155na	9510na	9570na			7125na	7175na	7330na	12025pa
		11940na						12035as	15460as	15470au	17570pa
0400-0500	Russia, Voice of Russia WS	5930na	6150na	7125na	7175na			21790au			
0400-0500 mtwhf	Russia, Voice of Russia WS	5920na				0500-0555	S Africa, Channel Africa	5955af	11900af		
0400-0455	S Africa, Channel Africa	5955af	9585af			0500-0600	Spain, R Exterior Espana	6055am			
0400-0430	Slovakia, Adv World Radio	11600af				0500-0600	Swaziland, Trans World R	3200af	4775af	6070af	6100af
0400-0500	Slovakia, Adv World Radio	7215eu						9500af			
0400-0430	Sri Lanka, Sri Lanka BC	9730as				0500-0515	Uganda, Radio	4976do			
0400-0430	Switzerland, Swiss R Intl	6135na	9885na			0500-0600	United Kingdom, BBC WS	3255af	3955eu	5975am	6005af
0400-0500	Switzerland, Swiss R Intl	9905na						6175am	6180eu	6190af	6195va
0400-0430	Tanzania, Radio	5050af						7120va	7160af	9410va	9610af
0400-0415	Uganda, Radio	4976do						9740as	11760as	12095as	15310as
0400-0500	United Kingdom, BBC WS	3255af	3955eu	5975af	6005af			15360as	15420af	15575va	17640af
		6175am	6180eu	6190af	6195eu			17885af			
		7160af	9410na	9600af	11760va			17760as			
		11955as	12085af	12095va	15280as			United Kingdom, BBC WS	15280as	17790as	
		15310as	15575va	17640af	17790as	0500-0530	USA, KAIJ Dallas TX	5810am			
	21660as					0500-0600	USA, KATN Salt Lk City UT	7510am			
0400-0430	United Kingdom, BBC WS	9605as	9610af	9895am	11730af	0500-0600	USA, KVOH Los Angeles CA	9975am			
0400-0500	USA, KAIJ Dallas TX	5810am				0500-0600	USA, KWHR Naalehu HI	9930as			
0400-0500	USA, KATN Salt Lk City UT	7510am				0500-0600	USA, Monitor Radio Intl	7535eu			
0400-0500	USA, KVOH Los Angeles CA	9975am				0500-0600	USA, Voice of America	4960af	5970af	6035af	6080af
0400-0500	USA, KWHR Naalehu HI	17780as						7170va	7295af	9700va	9775af
0400-0500	USA, Monitor Radio Intl	7535eu	9840af	6080af	7145af			11825me	12080af	12085eu	15205me
0400-0500	USA, Voice of America	4960af	6035af	6080af	7145af	0500-0600	USA, WGTG McCaysville GA	5085am			
		7340af	7415af	9575af	9775af	0500-0600	USA, WHRI Noblesville IN	5760am	7315am		
0400-0500	USA, WEWN Birmingham AL	5825eu	6890na	7425na		0500-0600	USA, WJCR Upton KY	7490na			
0400-0500	USA, WGTG McCaysville GA	5085am				0500-0600 smtwhf	USA, WMLK Bethel PA	9465eu			
0400-0500	USA, WHRI Noblesville IN	5760am	7315am			0500-0600	USA, WRNO New Orleans LA	7355am			
0400-0500	USA, WJCR Upton KY	7490na				0500-0600	USA, WWCN Nashville TN	2390am	3210am	5070am	5935am
0400-0500 smtwhf	USA, WMLK Bethel PA	9465eu				0500-0600	USA, WYFR Okeechobee FL	5985na	7355eu	9985af	
0400-0500	USA, WRNO New Orleans LA	7355am				0500-0528	Vatican State, Vatican R	9660af	11625eu		
0400-0500	USA, WWCN Nashville TN	2390am	3215am	5070am	5935am	0500-0520	Vatican State, Vatican R	5882eu	7250eu		
0400-0500	USA, WYFR Okeechobee FL	5985na	9985eu	11695af		0500-0600	Zambia, Christian Voice	3330af	6065af		
0400-0428	Vatican State, Vatican R	5882eu				0500-0530 vl	Zambia, R Zambia/ZNBC 1	4910do			
0400-0430	Vietnam, Voice of	12020na	15010na			0500-0600 vl	Zambia, R Zambia/ZNBC 2	6165do			
0400-0500	Zambia, Christian Voice	3330af	6065af			0500-0530 vl	Zimbabwe, Zimbabwe BC	3396do			
0400-0500 vl	Zambia, R Zambia/ZNBC 1	4910do				0525-0600	Ghana, Ghana Broadc Corp	3366do	4915do		
0400-0500 vl	Zambia, R Zambia/ZNBC 2	6165do				0530-0559	Austria, R Austria Intl	6015na			
0400-0500 vl	Zimbabwe, Zimbabwe BC	3396do				0530-0600	Guyana, Voice of	3290do			
0415-0440 vl	Italy, RAI Intl	5975eu	7270eu			0530-0600 vl	Kiribati, Radio	9810do			
0425-0500	Nigeria, FRCN/Radio	3326do	4770do	4990do		0530-0600	Romania, R Romania Intl	11940af	15250af	15365af	17745af
0430-0500	Australia, Defense Forces R	13525as						17790af			
0430-0459	Austria, R Austria Intl	6155eu	13730eu			0530-0600 vl	Thailand, Radio	9655eu	11905eu	15115eu	
0430-0500	Netherlands, Radio	6165na	9590na			0530-0600 vl	Zambia, R Zambia/ZNBC 1	7220do			
0430-0500 twrha	Portugal, R Portugal Intl	6150am	9570am			0530-0600 vl	Zimbabwe, Zimbabwe BC	5975do			
0430-0500	Russia, Voice of Russia WS	5905na	7330na								
0430-0500	Slovakia, Adv World Radio	11600eu									
0430-0500	Swaziland, Trans World R	3200af	4775af	6100af							
0430-0500	United Kingdom, BBC WS	15420af									
0430-0500	USA, Voice of America	7170va									
0455-0500	Malaysia, Voice of	6175as	9750as	15295au							
0459-0500	New Zealand, R NZ Intl	9795pa									



## FREQUENCIES

0600-0700 irreg	Anguilla, Caribbean Beacon	6090am				0700-0800 irreg	Anguilla, Caribbean Beacon	6090am			
0600-0700	Australia, Radio	13605as	15415as	15530as	17750as	0700-0800	Australia, Radio	9580pa	9860pa	13605as	15415as
0600-0630	Australia, Radio	11880pa	17795pa					15530as	17750as		
0600-0700 vl	Australia, VL8K Katherine	5025do				0700-0800 vl	Australia, VL8K Katherine	5025do			
0600-0700 vl	Australia, VL8T Tent Crk	4910do				0700-0800 vl	Australia, VL8T Tent Crk	4910do			
0600-0633	Australia, Defense Forces R	13525as				0700-0800	Canada, CFCX Montreal	6005do			
0600-0700 vl	Canada, CBC N Quebec Svc	9625do				0700-0800	Canada, CFRX Toronto	6070do			
0600-0700	Canada, CFCX Montreal	6005do				0700-0800	Canada, CFVP Calgary	6030do			
0600-0700	Canada, CFRX Toronto	6070do				0700-0800	Canada, CHNX Halifax	6130do			
0600-0700	Canada, CFVP Calgary	6030do				0700-0800	Canada, CKZU Vancouver	6160do			
0600-0700	Canada, CHNX Halifax	6130do				0700-0800	Costa Rica, RF Peace Intl	6205am	7385am		
0600-0700	Canada, CKZU Vancouver	6160do				0700-0727	Czech Rep, Radio Prague	7345eu	9485sa	9505eu	
0600-0700	Costa Rica, RF Peace Intl	6205am	7385am			0700-0800	Ecuador, HCJB	5860eu	9645pa	21455au	
0600-0700	Cuba, Radio Havana	6000na	9830na			0700-0800 as	Eq Guinea, R East Africa	15186af			
0600-0700	Ecuador, HCJB	9745am	21455am			0700-0800 mtwhf	Eq Guinea, Radio Africa	15186af			
0600-0650	Germany, Deutsche Welle	11915af	13790af	15185af	17820as	0700-0730	Georgia, Radio	11910eu			
		17860af	21680af			0700-0715	Ghana, Ghana Broadc Corp	3366do	4915do		
		3366do	4915do			0700-0730 vl	Italy, IRRS	3985va			
0600-0615	Ghana, Ghana Broadc Corp	3366do				0700-0800	Japan, R Japan/NHK World	7230eu	11740as	11850pa	11910as
0600-0700 vl	Italy, IRRS	3985va						11920as	15230me	15590me	17810va
0600-0700	Japan, R Japan/NHK World	9835as	12030as					17815af			
0600-0700 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do		0700-0800 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do	
0600-0700 vl	Kiribati, Radio	9810do				0700-0800 vl	Kiribati, Radio	9810do			
0600-0700	Lebanon, Voice of Hope	9960va				0700-0800	Lebanon, Voice of Hope	9960va			
0600-0700	Liberia, LCN/R Liberia Int	5100do	9750as	15295au		0700-0715	Liberia, LCN/R Liberia Int	5100do			
0600-0700	Malaysia, Voice of	6175as				0700-0800 asmtwh	Malaysia, Radio	7295do			
0600-0700	New Zealand, R NZ Intl	9795pa	4770do	4990do		0700-0800	Malaysia, Voice of	6175as	9750as	15295au	
0600-0630	Nigeria, FRCN/Radio	3326do	15230as			0700-0800	Monaco, Trans World Radio	9755eu			
0600-0650	North Korea, R Pyongyang	15180as	7295pa	9590af	13805af	0700-0758 as	New Zealand, R NZ Intl	9795pa			
0600-0630 s	Norway, Radio Norway Intl	7180eu	5905na	6150na	7175na	0700-0750	North Korea, R Pyongyang	15340af	17765me		
0600-0700 vl	Papua New Guinea, NBC	9675do	7330na	12025au	15460as	0700-0730 s	Norway, Radio Norway Intl	15245me			
0600-0700	Russia, Voice of Russia WS	5905na	15470pa	21790au		0700-0800 vl	Papua New Guinea, NBC	9675do			
		5920na				0700-0745	Romania, R Romania Intl	15370pa	17720pa	17790pa	17805pa
0600-0700 mtwhf	Russia, Voice of Russia WS	5920na				0700-0715 s	Romania, R Romania Intl	15370pa	17720pa	17790pa	17805pa
0600-0655	S Africa, Trans World R	11730af				0700-0800	Russia, Voice of Russia WS	7220as	9875pa	12025au	12035as
0600-0610	Sierra Leone, SLBS	3316do						15460as			
0600-0630	Slovakia, Adv World Radio	13715af	9545do			0700-0710	Sierra Leone, SLBS	3316do			
0600-0700	Slovakia, Adv World Radio	5905am	4775af	6070af	6100af	0700-0800 vl	Solomon Islands, SIBC	5020do	9545do		
0600-0630 vl	Solomon Islands, SIBC	5020do	9500af			0700-0800	Swaziland, Trans World R	4775af	6100af	9500af	9650af
0600-0700	Swaziland, Trans World R	3200af	9500af			0700-0800	Taiwan, VO Free China	5950na			
		3200af	9500af			0700-0800	United Kingdom, BBC WS	5975am	6175am	6190af	7145as
0600-0630	Switzerland, Swiss R Intl	9885af	11860af	13635af				7325eu	9410eu	9610af	9740as
0600-0700	United Kingdom, BBC WS	5975am	6005af	6175am	6180eu			11760as	11835af	11940af	11955as
		6190af	6195eu	7145as	7160af			12095va	15310as	15360as	15485af
		7325va	9410va	9610af	9740as			15575va	17640af	17760af	17785as
		11760as	11780eu	11940af	12095eu			17830af	21660as		
		15310as	15360as	15420af	15565va	0700-0800 as	United Kingdom, BBC WS	17885af			
		15575va	17640af	17785as	17885af	0700-0715	United Kingdom, BBC WS	6005af	7160af		
						0700-0730	United Kingdom, BBC WS	6180eu	6195eu	7325af	9410eu
0600-0700	USA, KAIJ Dallas TX	5810am						11780eu			
0600-0700	USA, KTBN Salt Lk City UT	7510am				0700-0800	USA, KAIJ Dallas TX	5810am			
0600-0700	USA, KVOH Los Angeles CA	9975am				0700-0800	USA, KTBN Salt Lk City UT	7510am			
0600-0700	USA, KWHR Naalehu HI	9930as				0700-0800	USA, KWHR Naalehu HI	9930au			
0600-0700	USA, Monitor Radio Intl	7535eu				0700-0800	USA, Monitor Radio Intl	7535eu			
0600-0700	USA, Voice of America	5970eu	5995va	6035eu	6080eu	0700-0800	USA, WEWN Birmingham AL	5825eu	7425na		
		7170va	7285af	9760me	11805va	0700-0800	USA, WHRI Noblesville IN	5760am	7315am		
		11825me	11950eu	15205me	15600eu	0700-0800	USA, WJCR Upton KY	7490na			
0600-0630	USA, Voice of America	4960af				0700-0800	USA, WMLK Bethel PA	9465eu			
0600-0700	USA, WEWN Birmingham AL	5825eu	6890na	7425na		0700-0800 vl	USA, WWCR Nashville TN	2390am	3210am	5070am	5935am
0600-0700	USA, WHRI Noblesville IN	5760am	7315am			0700-0800	Vanuatu, Radio	3945do	7260do		
0600-0700	USA, WJCR Upton KY	7490na				0700-0800	Zambia, Christian Voice	6065af			
0600-0700 smtwhf	USA, WMLK Bethel PA	9465eu				0700-0800 vl	Zambia, R Zambia/ZNBC 1	7220do			
0600-0700	USA, WRNO New Orleans LA	7355am				0700-0800 vl	Zimbabwe, Zimbabwe BC	5975do			
0600-0700	USA, WWCR Nashville TN	2390am	3210am	5070am	5935am	0715-0730	Croatia, Croatian Radio	5895eu	7165eu	9830eu	
0600-0700	USA, WYFR Okeechobee FL	9455af				0720-0800 vl	Switzerland, Swiss R Intl	6165eu	9535eu		
0600-0645	USA, WYFR Okeechobee FL	7355eu	9985eu			0730-0759	Chile, R Esperanza	6089am			
0600-0645 m-t/vl	Vatican State, Vatican R	4005eu	5880eu	7250eu	9645eu	0730-0745 s	Austria, R Austria Intl	6155eu	13730eu	15410me	17870me
		15215me				0730-0735	Greece, Voice of	7450eu	9425eu	15650au	
0600-0630	Vietnam, Voice of	5925as	10060as			0730-0800 vl	India, All India Radio	15185do	15260do		
0600-0700	Yemen, Yemeni Rep Radio	9780do				0730-0800	Italy, IRRS	7125va			
0600-0700	Zambia, Christian Voice	3330af	6065af			0730-0800 as	Netherlands, Radio	9720pa	9820pa		
0600-0700 vl	Zambia, R Zambia/ZNBC 1	7220do				0740-0800	Palau, KHBN/Voice of Hope	9730as			
0600-0700 vl	Zimbabwe, Zimbabwe BC	5975do				0745-0800 s	United Kingdom, BBC WS	15400va	15565va		
0603-0610	Croatia, Croatian Radio	5985eu	7165eu	9830eu		0745-0755	Guam, TWR/KTWR	15200as			
0630-0700	Australia, Radio	9580pa	9860pa			0759-0800 as	Ghana, Ghana Broadc Corp	3366do	4915do		
0630-0700	Belgium, R Vlaanderen Int	5985eu	9925eu	9940au			Greece, Voice of	7450eu	9425eu	15650au	
0630-0700	Vatican State, Vatican R	11625af	13765af	15570af			New Zealand, R NZ Intl	9700pa			
0631-0640	Romania, R Romania Intl	7105eu	9625eu	9665eu	11775eu						
0645-0700 as	Monaco, Trans World Radio	9755eu									
0645-0700	Romania, R Romania Intl	15370pa	17720pa	17790as	17805as						
0655-0700 mtwhf	Monaco, Trans World Radio	9755eu									



## FREQUENCIES

0800-0900 irreg	Anguilla, Caribbean Beacon	6090am				0900-1000 irreg	Anguilla, Caribbean Beacon	6090am			
0800-0900	Australia, Radio	5995pa	6020pa	6080pa	9710pa	0900-1000	Australia, Radio	9860pa	13605as	21725as	
		9860pa	12080pa	13605pa	21725as	0900-1000 vl	Australia, VL8A Alice Spg	2310do			
0800-0830	Australia, Radio	15415as	17715pa	17880as		0900-1000 vl	Australia, VL8K Katherine	2485do			
0800-0830 vl	Australia, VL8T Tent Crk	5025do				0900-1000 vl	Australia, VL8T Tent Crk	2325do			
0800-0900 vl	Canada, CBC N Quebec Svc	4910do				0900-0925 mtwhfa	Belgium, R Vlaanderen Int	6035eu			
0800-0900	Canada, CFCX Montreal	9625do				0900-1000	Canada, CFCX Montreal	6005do			
0800-0900	Canada, CFRX Toronto	6005do				0900-1000	Canada, CFRX Toronto	6070do			
0800-0900	Canada, CFVP Calgary	6070do				0900-1000	Canada, CFVP Calgary	6030do			
0800-0900	Canada, CHNX Halifax	6030do				0900-1000	Canada, CHNX Halifax	6130do			
0800-0900	Canada, CKZU Vancouver	6130do				0900-1000	Canada, CKZU Vancouver	6160do			
0800-0835 vl	Chile, R Esperanza	6160do				0900-1000	China, China Radio Intl	11755pa	15440pa		
0800-0900	Costa Rica, RF Peace Intl	6089am				0900-1000	Costa Rica, RF Peace Intl	6205am	7385am		
0800-0900	Ecuador, HCJB	6205am	7385am			0900-1000	Czech Rep, Radio Prague	15640me	17485af		
0800-0900 as	Eqt Guinea, R East Africa	5860eu	9465pa	21455au		0900-1000	Ecuador, HCJB	9465pa	21455au		
0800-0900 mtwhf	Eqt Guinea, Radio Africa	15186af				0900-1000 as	Eqt Guinea, R East Africa	15186af			
0800-0830	Finland, YLE/R Finland	15186af				0900-1000 mtwhf	Eqt Guinea, Radio Africa	15186af			
0800-0805 s	Ghana, Ghana Broadc Corp	13645as	15235au			0900-0950	Germany, Deutsche Welle	6160au	9565af	12025af	17715au
0800-0900	Guam, TWR/KTWR	3366do						17800af	21600af	21680au	
0800-0900	Indonesia, Voice of	15200as				0900-0915 mtwtf	Ghana, Ghana Broadc Corp	3366do	4915do		
0800-0900 m-t/vl	Italy, IRRS	9525as				0900-0915	Guam, TWR/KTWR	15200as			
0800-0900 vl	Kiribati, Radio	7125va				0900-1000	Guyana, Voice of	3290do			
0800-0900	Lebanon, Voice of Hope	9810do				0900-1000 vl	Italy, IRRS	7125va			
0800-0900	Liberia, LCN/R Liberia Int	9960va				0900-1000	Japan, R Japan/NHK World	7125as	11815as	11850au	
0800-0900	Malaysia, Radio	5100do				0900-0930 vl	Kiribati, Radio	9810do			
0800-0825	Malaysia, Voice of	7295do				0900-1000	Lebanon, Voice of Hope	9960va			
0800-0835 a	Monaco, Trans World Radio	6175as	9750as	15295au		0900-0915	Liberia, LCN/R Liberia Int	5100do			
0800-0850 s	Monaco, Trans World Radio	9755eu				0900-1000	Malaysia, Radio	7295do			
0800-0820 mtwhf	Monaco, Trans World Radio	9755eu				0900-0925	Netherlands, Radio	9720pa	9820au	13700pa	
0800-0825	Netherlands, Radio	9720pa	9820pa			0900-1000	New Zealand, R NZ Intl	9700pa			
0800-0816 mtwhf	New Zealand, R NZ Intl	9795pa				0900-0930 s	Norway, Radio Norway Intl	13800as	15170au		
0800-0900	New Zealand, R NZ Intl	9700pa				0900-1000 as	Palau, KHBN/Voice of Hope	9730as			
0800-0850	North Korea, R Pyongyang	15180as	15230as			0900-1000 vl	Papua New Guinea, NBC	4890do			
0800-0830 s	Norway, Radio Norway Intl	15170as				0900-1000	Russia, Voice of Russia WS	7150va	7220as	9675pa	9835pa
0800-0805	Pakistan, Radio	15470eu	17900eu					9875au	11655as	11800as	12025as
0800-0900 as	Palau, KHBN/Voice of Hope	9730as				13785as	15490as				15560as
0800-0900 vl	Papua New Guinea, NBC	9675do				15580as	17755as	17860as			
0800-0900	Russia, Voice of Russia WS	7220as	9675pa	9835au	9875au	0900-0930	Switzerland, Swiss R Intl	9885pa	13685pa	13685pa	17515au
		17860au				0900-1000	United Kingdom BBC WS	6190af	6195as	9410eu	9740as
0800-0810	Sierra Leone, SLBS	3316do						11750as	11765va	11940af	11945as
0800-0900 vl	Solomon Islands, SIBC	5020do	9545do			12095eu	15190sa	15565as	15575va	17640va	15360as
0800-0900	South Korea, R Korea Intl	9570au	13670eu			15400af	15485va	17705eu	17830af	21660as	17785as
0800-0820	Swaziland, Trans World R	4775af	6100af	9500af	9650af			7325eu	15310as	15360pa	15280as
0800-0900	United Kingdom, BBC WS	6190af	7325eu	9410eu	9740as	0900-0915	United Kingdom, BBC WS	9580as	11760as	11955as	
		11750as	11760as	11940af	11955as	0900-1000	USA, KAIJ Dallas TX	5810am			
		12095eu	15310as	15360va	15400af	0900-1000	USA, KATN Salt Lk City UT	7510am			
		15485va	15575va	17640va	17760as	0900-1000	USA, Monitor Radio Intl	7395sa	7535eu	13840au	15665as
		17785as	17830af	21660as		0900-1000	USA, WEWN Birmingham AL	7425na	15665eu		
0800-0900 as	United Kingdom, BBC WS	15565va	17885af			0900-1000	USA, WGTG McCaysville GA	9400am			
0800-0815	United Kingdom, BBC WS	7145pa	11835af			0900-1000	USA, WHRI Noblesville IN	6040am	9495am	9930am	
0800-0900	USA, KAIJ Dallas TX	5810am				0900-1000	USA, WJCR Upton KY	7490na			
0800-0900	USA, KNLS Anchor Point AK	9615as				0900-1000 as	USA, WVHA Greenbush ME	13825af			
0800-0900	USA, KATN Salt Lk City UT	7510am				0900-1000	USA, WWCN Nashville TN	2390am	3210am	5070am	5935am
0800-0900	USA, KWHR Naalehu HI	9930as				0900-1000	USA, WYFR Okeechobee FL	5950na			
0800-0900	USA, Monitor Radio Intl	7535eu	11550pa	15665eu		0900-1000	Zambia, Christian Voice	6065af			
0800-0900	USA, WEWN Birmingham AL	5825eu	7425na			0900-1000 vl	Zambia, R Zambia/ZNBC 1	7220do			
0800-0900	USA, WHRI Noblesville IN	5760am	7315am	9930am		0900-1000 vl	Zimbabwe, Zimbabwe BC	5975do			
0800-0900	USA, WJCR Upton KY	7490na				0915-1000	Bhutan, Bhutan BC Service	6035do			
0800-0900 as	USA, WVHA Greenbush ME	13825af				0915-1000	Ghana, Ghana Broadc Corp	6130do	7295do		
0800-0830 vl	Vanuatu, Radio	3945do	3210am	5070am	5935am	0930-1000 s	Armenia, Voice of	15270eu			
0800-0900	Zambia, Christian Voice	6065af	7260do			0930-0955 mtwhfa	Austria, R Austria Intl	15455as	17870au		
0800-0900 vl	Zambia, R Zambia/ZNBC 1	7220do				0930-1000	Canada, CKZN St John's	6160do			
0800-0900 vl	Zimbabwe, Zimbabwe BC	5975do				0930-1000	Netherlands, Radio	12065au	13710pa		
0803-0810	Croatia, Croatian Radio	5895eu	7165eu	9830eu		0930-1000	Philippines, FEBC/R Intl	11635as			
0815-0900 mtwtf	Nigeria, FRCN/Radio	3326do	4770do	4990do		0935-1000	Pakistan, Radio	17900eu			
0815-0830	Switzerland, Swiss R Intl	6165eu	9535eu			0944-0949 vl	Kazakhstan, Radio Almaty	11840eu			
0817-0900 mtwhf	New Zealand, R NZ Intl	9700pa									
0830-0900 vl	Australia, VL8A Alice Spg	2310do									
0830-0900 vl	Australia, VL8K Katherine	2485do									
0830-0900 vl	Australia, VL8T Tent Crk	2325do									
0830-0900	Georgia, Radio	11910me									
0830-0900	Guyana, Voice of	3290do									
0830-0840	India, All India Radio	7250do	15185do	15260do							
0830-0900	Netherlands, Radio	9720pa	9820pa								
0830-0900	Slovakia, R Slovakia Intl	11990au	17550au	21705au							
0830-0900	United Kingdom, BBC WS	15280as									
0850-0853 s	Russia, R Pacific Ocean	7185as									
0855-0900	Guam, TWR/KTWR	11830au									

## MT MONITORING TEAM

Next Reporting Deadline: May 21, 1997

Gayle Van Horn  
Frequency Manager  
swbcsked@grove.net

Jim Frimmel  
Program Manager  
DXComp@aol.com

Jacques d'Avignon  
Propagation  
Ontario, Canada  
monitor@limestone.kosone.com

Dave Datko, CA

Lloyd VanHorn, NC



## FREQUENCIES

1000-1100 irreg	Anguilla, Caribbean Beacon	6090am			
1000-1100	Australia, Radio	9710pa	9860pa	13605as	21725as
1000-1100 vl	Australia, VL8A Alice Spg	2310do			
1000-1100 vl	Australia, VL8K Katherine	2485do			
1000-1100 vl	Australia, VL8T Tent Crk	2325do			
1000-1100 vl	Canada, CBC N Quebec Svc	9625do			
1000-1100	Canada, CFCX Montreal	6005do			
1000-1100	Canada, CFRX Toronto	6070do			
1000-1100	Canada, CFVP Calgary	6030do			
1000-1100	Canada, CHNX Halifax	6130do			
1000-1100	Canada, CKZN St John's	6160do			
1000-1100	Canada, CKZU Vancouver	6160do			
1000-1100	China, China Radio Intl	11755pa	15440pa		
1000-1100	Costa Rica, RF Peace Intl	6205am	7385am		
1000-1100	Ecuador, HCJB	9465pa	21455au		
1000-1100 as	Eqt Guinea, R East Africa	15186af			
1000-1100 mtwhf	Eqt Guinea, Radio Africa	15186af			
1000-1100	Guam, TWR/KTWR	9870as			
1000-1100	India, All India Radio	11585as	13700as	15050as	17387au
		17840as			
1000-1100 vl	Italy, IRRS	7125va			
1000-1100	Jordan, Radio	11690eu			
1000-1100	Lebanon, Voice of Hope	9960va			
1000-1100	Malaysia, Radio	7295do			
1000-1100 vl	Malaysia, RTM Kuching	7160do			
1000-1100 vl	Malaysia, RTM KotaKinabalu	5980do			
1000-1025	Netherlands, Radio	12065au	13710pa		
1000-1100	New Zealand, R NZ Intl	9700pa			
1000-1100 as	Palau, KHBH/Voice of Hope	9730as			
1000-1100 vl	Papua New Guinea, NBC	4890do			
1000-1100	Philippines, FEBC/R Intl	11635as			
1000-1100	Russia, Voice of Russia WS	9705as	11655as	13785as	15120as
		15460as	15490as	15560as	17755as
		17860as			
1000-1100	United Kingdom, BBC WS	5965va	6190af	6195am	9410eu
		9740as	12095eu	15310as	15485va
		11940af	15575me	17640af	17705af
		15565as			
		17885va			
1000-1100 as	United Kingdom, BBC WS	15190am	15400am	17830af	
1000-1030	United Kingdom, BBC WS	15360as			
1000-1100	USA, KAIJ Dallas TX	5810am	9815am		
1000-1100	USA, KTNB Salt Lk City UT	7510am			
1000-1100	USA, KWHR Naalehu HI	9930as			
1000-1100	USA, Monitor Radio Intl	6095na	7395sa	15665as	15725as
1000-1100	USA, Voice of America	5985pa	6165am	7405am	9590am
		11720pa	15425pa		
		7425na	15665eu		
1000-1100	USA, WEWN Birmingham AL	9400am			
1000-1100	USA, WGTG McCaysville GA	6040am	9495am	9930am	
1000-1100	USA, WHRI Noblesville IN	7490na			
1000-1100	USA, WJCR Upton KY	13825af			
1000-1100 as	USA, WVHA Greenbush ME	5070am	5935am	9475am	15685am
1000-1100	USA, WWCR Nashville TN	5950na	7355na		
1000-1100	USA, WYFR Okeechobee FL	5880eu	11740af	15210af	17550af
1000-1100 m-f/vl	Vatican State, Vatican R	5940as	7270as	7400as	9840as
1000-1030	Vietnam, Voice of	12020as	15010as		
		6065af			
1000-1100	Zambia, Christian Voice	7220do			
1000-1100 vl	Zambia, R Zambia/ZNBC 1	15455as	17870au		
1030-1055 s	Austria, R Austria Intl	7345eu	9505eu		
1030-1057	Czech Rep, Radio Prague	5990do	7110do	9705do	
1030-1100 mtwhf	Ethiopia, Radio	9870as			
1030-1100	Guam, AWR/KSDA	6045eu	9860eu	12065as	13710as
1030-1100	Netherlands, Radio	9650am			
1030-1100	South Korea, R Korea Intl	11835as	17850as		
1030-1100	Sri Lanka, Sri Lanka BC	13665eu	15395eu	17630eu	21605me
1030-1055	UAE, Radio Dubai				

1100-1200 irreg	Anguilla, Caribbean Beacon	11775am			
1100-1200	Australia, Radio	9580pa	9770pa	9860pa	11660as
		13605as			
1100-1130	Australia, Radio	11640as			
1100-1200 vl	Australia, VL8A Alice Spg	2310do			
1100-1200 vl	Australia, VL8K Katherine	2485do			
1100-1200 vl	Australia, VL8T Tent Crk	2325do			
1100-1200	Canada, CFCX Montreal	6005do			
1100-1200	Canada, CFRX Toronto	6070do			
1100-1200	Canada, CFVP Calgary	6030do			
1100-1200	Canada, CHNX Halifax	6130do			
1100-1200	Canada, CKZN St John's	6160do			
1100-1200	Canada, CKZU Vancouver	6160do			
1100-1200	Costa Rica, Adv World R	7375am	9725am	13750am	
1100-1200	Costa Rica, RF Peace Intl	6205am	7385am		
1100-1200	Ecuador, HCJB	12005am	15115am	21455au	
1100-1200 as	Eqt Guinea, R East Africa	15186af			
1100-1200	Eqt Guinea, Radio Africa	9530as			
1100-1150	Germany, Deutsche Welle	15370af	15410af	17765af	17800af
1100-1157	Iran, VOIRI	11875me	11930me	15084af	15260af
1100-1200 vl	Italy, IRRS	7125va			
1100-1200	Japan, R Japan/NHK World	6120na	7125na	11815as	
1100-1200	Jordan, Radio	11690eu			
1100-1200	Lebanon, Voice of Hope	9960va			
1100-1110	Liberia, LCN/R Liberia Int	5100do			
1100-1200	Malaysia, Radio	7295do			
1100-1200 vl	Malaysia, RTM Kuching	7160do			
1100-1200 vl	Malaysia, RTM KotaKinabalu	5980do			
1100-1200	Mozambique, Radio Maputo	11820af	11835af		
1100-1125	Netherlands, Radio	12065as	13710as		
1100-1200	New Zealand, R NZ Intl	9700pa			
1100-1150	North Korea, R Pyongyang	6575na	9975na	11335na	
1100-1120	Pakistan, Radio	15470eu	17900eu		
1100-1130 as	Palau, KHBH/Voice of Hope	9730as			
1100-1200 vl	Papua New Guinea, NBC	4890do			
1100-1200	Russia, Voice of Russia WS	4740as	9725as	9755as	9820as
		9875as	11655as	13785as	15120as
		17755as	17860as		
1100-1200	Singapore, R Singapore Int	6105as	6155as		
1100-1130	Sri Lanka, Sri Lanka BC	11835as	17850as		
1100-1130	Switzerland, Swiss R Intl	13635as	15415as	17515as	
1100-1200	Taiwan, Voice of Asia	7445as			
1100-1200	United Kingdom, BBC WS	5965am	6190af	6195va	9410eu
		9580as	11750as	11940af	11955as
		15220am	15310as	15485va	15575va
		17705eu	17830af	17885af	21660af
1100-1130 as	United Kingdom, BBC WS	15190am			
1100-1130	United Kingdom, BBC WS	9700as	11765va	15310as	17785as
1100-1145	United Kingdom, BBC WS	15400af	17790as		
1100-1200	USA, KAIJ Dallas TX	5810am			
1100-1200	USA, KTNB Salt Lk City UT	7510am			
1100-1200	USA, KWHR Naalehu HI	9930as			
1100-1200	USA, Monitor Radio Intl	6095na	7395sa	9355eu	9430au
1100-1200	USA, Voice of America	5985as	6110as	9645as	9760as
		11705as	11720as	15425as	
1100-1200	USA, WEWN Birmingham AL	7425na	15665eu		
1100-1200	USA, WHRI Noblesville IN	6040am	9495am		
1100-1200	USA, WJCR Upton KY	7490na			
1100-1200 as	USA, WVHA Greenbush ME	13825eu			
1100-1200	USA, WWCR Nashville TN	5935am	7435am	9475am	15685am
1100-1200	USA, WYFR Okeechobee FL	5950na	11830na	11970na	
1100-1145	USA, WYFR Okeechobee FL	7355na			
1100-1130	Vietnam, Voice of	7285as	9730as		
1100-1200	Zambia, Christian Voice	6065af			
1100-1200 vl	Zambia, R Zambia/ZNBC 1	7220do			
1130-1200 vl	China, China Radio Intl	6995as	11445as	11700as	
1130-1140	Lesotho, Radio Lesotho	4800do			
1130-1200	Myanmar, Voice of	5990do			
1130-1200	Netherlands, Radio	6045eu	9860eu		
1130-1200	Sweden, Radio	11650na	15240na		
1130-1200	United Kingdom, BBC WS	6195am	17705va		
1130-1200 f	Vatican State, Vatican R	15595as	17550au		
1135-1140	India, All India Radio	9595do	11620do	11710do	15185do

## Macintosh Software

SHORTWAVE NAVIGATOR  
FREQUENCY VALET • UTCLOCKFREQUENCIES/PROGRAMS/COMPUTER CONTROL  
(DRAKE • KENWOOD • JRC)SEND \$2 FOR DEMO DISK TO:  
DX COMPUTING • 232 SQUAW CREEK RD.  
WILLOW PARK, TX 76087HAUSER'S HIGHLIGHTS  
BULGARIA: R. BULGARIA

Summer hours for English

UTC	Target	kHz
1200	EAs	13790
1900, 2100	Eu	9700, 11720
2300	NAm	7480, 9435
0400	NAm	9485 11720

(PanView and via Roger Chambers)



## FREQUENCIES

1200-1300 irreg	Anguilla, Caribbean Beacon	11775am				1300-1400 irreg	Anguilla, Caribbean Beacon	11775am			
1200-1300	Australia, Radio	5995as	9580pa	9710as	9860pa	1300-1400	Australia, Radio	9580pa	9770pa	11800pa	
		11660as	13605as			1300-1330	Australia, Radio	13605as			
1200-1300 vl	Australia, VL8A Alice Spg	2310do				1300-1400 vl	Australia, VL8A Alice Spg	2310do			
1200-1300 vl	Australia, VL8K Katherine	2485do				1300-1400 vl	Australia, VL8K Katherine	2485do			
1200-1300 vl	Australia, VL8T Tent Crk	2325do				1300-1400 vl	Australia, VL8T Tent Crk	2325do			
1200-1300	Brazil, Radio Bras	15445na				1300-1325 mtwhfa	Belgium, R Vlaanderen Int	13685na	13795as		
1200-1230	Bulgaria, Radio	13790as				1300-1320	Brazil, Radio Bras	15445na			
1200-1215	Cambodia, Natl Voice of	11940as				1300-1400 vl	Canada, CBC N Quebec Svc	9625do	9625do		
1200-1300 vl	Canada, CBC N Quebec Svc	9625do				1300-1400	Canada, CFCX Montreal	6005do			
1200-1300	Canada, CFCX Montreal	6005do				1300-1400	Canada, CFCX Toronto	6070do			
1200-1300	Canada, CFCX Toronto	6070do				1300-1400	Canada, CFCX Calgary	6030do			
1200-1300	Canada, CFCX Calgary	6030do				1300-1400	Canada, CHNX Halifax	6130do			
1200-1300	Canada, CHNX Halifax	6130do				1300-1400	Canada, CKZN St John's	6160do			
1200-1300	Canada, CKZN St John's	6160do				1300-1400	Canada, CKZU Vancouver	6160do			
1200-1300	Canada, CKZU Vancouver	6160do				1300-1400	Canada, R Canada Intl	9640am	11855am	13650am	
1200-1230	Canada, R Canada Intl	9660as	15195as			1300-1400 s	Canada, R Canada Intl	11855am	13650am		
1200-1300	Canada, R Canada Intl	9640am	11855am	13650am		1300-1400	China, China Radio Intl	7385na	7410as	9715as	11660pa
1200-1300	China, China Radio Intl	7385na	9565as	9715as	11660as	1300-1400	Costa Rica, RF Peace Intl	6205am	7385am		
		11795pa	15440am			1300-1330	Czech Rep, Radio Prague	13580eu	17485af		
1200-1230 vl	China, China Radio Intl	6995as	11700as	12110as		1300-1400	Ecuador, HCJB	12005am	15115am	21455am	
1200-1300	Costa Rica, Adv World R	5030am	6150am	9725am	13750am	1300-1330	Egypt, Radio Cairo	17595as			
1200-1300 vl	Cyprus, BRT International	6150do				1300-1400 as	Eqt Guinea, R East Africa	15186af			
1200-1300	Ecuador, HCJB	12005am	15115am	21455am		1300-1400	Eqt Guinea, Radio Africa	9530as			
1200-1300 as	Eqt Guinea, R East Africa	15186af				1300-1330 vl	Italy, IRRS	7125va			
1200-1300	Eqt Guinea, Radio Africa	9530as				1300-1400	Jordan, Radio	11690eu			
1200-1300	France, Radio France Intl	11600va	15155eu	15195eu	15530af	1300-1310	Liberia, LCN/R Liberia Int	5100do			
1200-1230	Iran, VOIRI	11875me	11930me	15084af	15260af	1300-1400	Malaysia, Radio	7295do			
1200-1300 vl	Italy, IRRS	7125va				1300-1400 vl	Malaysia, RTM Kuching	7160do			
1200-1300	Jordan, Radio	11690eu				1300-1400 vl	Malaysia, RTM Kota Kinabalu	5980do			
1200-1300	Lebanon, Voice of Hope	9960va				1300-1400 occsnal	New Zealand, R NZ Intl	6070pa			
1200-1300	Malaysia, Radio	7295do				1300-1350	North Korea, R Pyongyang	9345as	9640eu	11740as	15230as
1200-1300 vl	Malaysia, RTM Kota Kinabalu	5980do				1300-1400 vl	Papua New Guinea, NBC	4890do			
1200-1250	Myanmar, Voice of	5990do				1300-1400	Philippines, FEBC/R Intl	11995as			
1200-1300	Netherlands, Radio	6045eu	9860eu			1300-1400	Romania, R Romania Intl	9683eu	11940eu	15390eu	17745eu
1200-1206	New Zealand, R NZ Intl	9700pa				1300-1400	Russia, Voice of Russia WS	7130me	7165me	9470me	9840me
1200-1230 s	Norway, Radio Norway Intl	9590eu	13800na	13805as	15605au			15205me			
1200-1300 vl	Papua New Guinea, NBC	4890do				1300-1400	Singapore, R Singapore Int	6105as	6155as		
1200-1255	Poland, Polish R Warsaw	6095eu	7145eu	7270eu	9525eu	1300-1400 mtwhf	Sri Lanka, Sri Lanka BC	9730as			
		11815eu				1300-1330	Switzerland, Swiss R Intl	7230as	7480as	13635as	15120as
1200-1300	Russia, Voice of Russia WS	4740as	4975as	9705as	15460as	1300-1330	Turkey, Voice of	13695eu	15290as		
		17860as				1300-1400	United Kingdom, BBC WS	5990as	6190af	6195va	9410eu
1200-1300	Singapore, R Singapore Int	6105as	6155as					9515am	9740va	11750as	11760as
1200-1300	South Korea, R Korea Intl	7285af						11865am	11940af	12095eu	15220am
1200-1300	Switzerland, Swiss R Intl	6165eu	9535eu					15310as	15420af	15485va	15565as
1200-1300	Taiwan, VO Free China	7130au	9610as					15575va	17640va	17705af	17830af
1200-1300	United Kingdom, BBC WS	6190af	6195va	9410eu	9515am			21470af	21660af		
		9580as	9740as			1300-1400	USA, KAIJ Dallas TX	13815am			
		15220am	15310as			1300-1400	USA, KNLS Anchor Point AK	7365as			
		17705af	17830af			1300-1400	USA, KTNB Salt Lk City UT	7510am			
1200-1300	USA, KAIJ Dallas TX	5810am				1300-1400	USA, KWHR Naalehu HI	9930as			
1200-1300	USA, KTNB Salt Lk City UT	7510am				1300-1400	USA, Monitor Radio Intl	6095na	9355as	9455am	13840as
1200-1300	USA, KWHR Naalehu HI	9930as				1300-1400	USA, Voice of America	6110as	9645as	9760as	11705as
1200-1300	USA, Monitor Radio Intl	6095na	9355as	9430au	9455sa			11715as	15425as		
1200-1300	USA, Voice of America	6110as	9760as	11705as	11715as			9455na	11875na	15665eu	
		15425as				1300-1400	USA, WEWN Birmingham AL	9455na			
1200-1300	USA, WEWN Birmingham AL	7425na	11875na	15665eu		1300-1400	USA, WGTG McCaysville GA	9400am			
1200-1300	USA, WGTG McCaysville GA	9400am				1300-1400	USA, WHRI Noblesville IN	6040am			
1200-1300	USA, WHRI Noblesville IN	6040am	15105am			1300-1400	USA, WJCR Upton KY	7490na	15105am		
1200-1300	USA, WJCR Upton KY	7490na				1300-1400	USA, WJCR Upton KY	7490na			
1200-1300 s	USA, WRMI/R Miami Intl	9955am				1300-1400 s	USA, WRMI/R Miami Intl	9955am			
1200-1300	USA, WWCR Nashville TN	5935am	7435am	9475am		1300-1400 as	USA, WVHA Greenbush ME	15745na			
1200-1300	USA, WYFR Okeechobee FL	5950na	11830na	13695na		1300-1400	USA, WWCR Nashville TN	9475am	12160am	13845am	15685am
1200-1245	USA, WYFR Okeechobee FL	11970am				1300-1400	USA, WYFR Okeechobee FL	5950na	11830na	17760eu	
1200-1230	Uzbekistan, R Tashkent	5060as	5975as	6025as	9715as	1300-1400	Zambia, Christian Voice	6065af			
1200-1300	Zambia, Christian Voice	6065af				1300-1400 vl	Zambia, R Zambia/ZNBC 1	7220do			
1200-1300 vl	Zambia, R Zambia/ZNBC 1	7220do				1315-1400 mtwhfa	Bhutan, Bhutan BC Service	5030do			
1203-1210	Croatia, Croatian Radio	5895eu	7165eu	13830eu		1330-1357	Canada, R Canada Intl	9535as	11795as	11935eu	15325va
1207-1300 occsnal	New Zealand, R NZ Intl	6070pa						17820af			
1215-1300	Egypt, Radio Cairo	17595as				1330-1400	China, Heilongjiang PBS	4840do			
1215-1300	United Kingdom, BBC WS	15220am				1330-1400	Guam, AWR/KSDA	9650as			
1230-1255	Austria, R Austria Intl	6155eu	13730na			1330-1400	India, All India Radio	11620as	13750as		
1230-1300	Bangladesh, Bangla Betar	7185as	9550as			1330-1400 vl	Italy, IRRS	3985va			
1230-1255 s	Belgium, R Vlaanderen Int	13785na	15555na			1330-1400	Mongolia, Voice of	12085au			
1230-1300 mtwhf	Finland, YLE/R Finland	11900na	15400na			1330-1400	Netherlands, Radio	9890as	12090as	15585as	
1230-1235	India, All India Radio	4860do	6185do	17865do		1330-1400	Sweden, Radio	11650na	13740pa	15240na	
1230-1300 vl	Indonesia, RRI Sorong	4875do				1330-1355	UAE, Radio Dubai	13665eu	15395eu	17630eu	21605me
1230-1300	Mongolia, Voice of	12085as				1330-1400	Uzbekistan, R Tashkent	5060as	5975as	6025as	9715as
1230-1300	Serbia, Radio Yugoslavia	11835eu				1330-1400	Vietnam, Voice of	5940eu	7270eu	7400eu	9840eu
1230-1300	South Korea, R Korea Intl	9570as	9640as	13670as				12020eu	15010eu		
1230-1300 mtwhf	Sri Lanka, Sri Lanka BC	9730as				1335-1345	Greece, Voice of	11645na	15175na		
1230-1300	Sweden, Radio	13740as	15240pa			1345-1400	Vatican State, Vatican R	9500as	11625as		
1230-1300	Thailand, Radio	9505as	9655as	9810as		1350-1400	South Korea, KBS-1	3930do			
1230-1300	Turkey, Voice of	13695eu	15290as								
1230-1300	Vietnam, Voice of	5940as	7270as	7400as	9840as						
		12020as	15010as								
1240-1250	Greece, Voice of	17525af									



## FREQUENCIES

1400-1500	Algeria, R Algiers Intl	11715eu	15160me	15205af	1500-1600 irreg	Anguilla,Caribbean Beacon	11775sam				
1400-1500 irreg	Anguilla,Caribbean Beacon	11775sam			1500-1600	Australia, Radio	6060pa	6080pa	9615as	9850pa	
1400-1500	Australia, Radio	11800pa					11660as	11800pa	12080pa		
1400-1430	Australia, Radio	9770pa			1500-1600 vl	Australia, VL8A Alice Spg	2310do				
1400-1500 vl	Australia, VL8A Alice Spg	2310do			1500-1600 vl	Australia, VL8K Katherine	2485do				
1400-1500 vl	Australia, VL8K Katherine	2485do			1500-1600 vl	Australia, VL8T Tent Crk	2325do				
1400-1500 vl	Australia, V/8T Tent Crk	2325do			1500-1600 vl	Canada, CBC N Quebec Svc	9625do				
1400-1500 vl	Canada, CBC N Quebec Svc	9625do			1500-1600	Canada, CFCX Montreal	6005do				
1400-1500	Canada, CFCX Montreal	6005do			1500-1600	Canada, CFRX Toronto	6070do				
1400-1500	Canada, CFRX Toronto	6070do			1500-1600	Canada, CFVP Calgary	6030do				
1400-1500	Canada, CFVP Calgary	6030do			1500-1600	Canada, CHNX Halifax	6130do				
1400-1500	Canada, CHNX Halifax	6130do			1500-1600	Canada, CKZN St John's	6160do				
1400-1500	Canada, CKZN St John's	6160do			1500-1600 s	Canada, R Canada Intl	11855am	13650am			
1400-1500	Canada, CKZU Vancouver	6160do			1500-1600	China, China Radio Intl	7405na	9535as	9785as		
1400-1500 s	Canada, R Canada Intl	11855am	13650am		1500-1600	Costa Rica,RF Peace Intl	6205am	7385am			
1400-1500	China, China Radio Intl	7405na	9535as	9785as	1500-1600	Ecuador, HCJB	12005am	15115am	21455am		
1400-1500	Costa Rica,RF Peace Intl	6205am	7385am		1500-1600 as	Eqt Guinea, R East Africa	15186af				
1400-1500	Ecuador, HCJB	12005am	15115am	21455am	1500-1600	Guam, TWR/KTWR	11580as				
1400-1500 as	Eqt Guinea, R East Africa	15186af			1500-1600 t	Ireland,W Coast R Ireland	6015eu				
1400-1500	France, Radio France Intl	7110as	12030af	17560me	1500-1600 vl	Italy, IRRS	3985va				
1400-1500	India, All India Radio	11620as	13750as		1500-1600	Japan, R Japan/NHK World	7200af	7240af	7240af	9535na	
1400-1430	Israel, Kol Israel	9390na	11605na				15355af				
1400-1500 vl	Italy, IRRS	3985va			1500-1600	Jordan, Radio	11690eu				
1400-1500	Jordan, Radio	11690eu			1500-1510	Liberia,LCN/R Liberia Int	5100do				
1400-1500	Malaysia, Radio	7295do			1500-1600	Malaysia, Radio	7295do				
1400-1500 vl	Malaysia, RTM Kuching	7160do			1500-1600 vl	Malaysia, RTM Kuching	7160do				
1400-1500 vl	Malaysia,RTM KotaKinabalu	5980do			1500-1600 vl	Malaysia,RTM KotaKinabalu	5980do				
1400-1430	Mexico, Radio Mexico Intl	9705na			1500-1530	Mexico, Radio Mexico Intl	9705na				
1400-1500	Netherlands, Radio	9890as	12090as	15585as	1500-1515 s	Myanmar, Voice of	5990do				
1400-1500 occsnal	New Zealand, R NZ Intl	6070pa			1500-1525	Netherlands, Radio	9890as	12090as	15585as		
1400-1410	Pakistan, Radio	9645as	9900as	11570me	1500-1600 occsnal	New Zealand, R NZ Intl	6070pa				
1400-1500 vl	Papua New Guinea, NBC	4890do			1500-1550	North Korea, R Pyongyang	9325eu	9640eu	9975na	13785me	
1400-1500	Philippines, FEBC/R Intl	11995as									
1400-1500	Russia,Voice of Russia WS	4740me	4940me	4975me	1500-1530 s	Norway, Radio Norway Intl	9980as	11840as			
		7115af	7130me	7165me	1500-1530 as	Palau, KHBN/Voice of Hope	9985as				
		7245af	7260af	7425af	1500-1600 vl	Papua New Guinea, NBC	4890do				
		9470af	9585af	9635me	1500-1600	Philippines, FEBC/R Intl	11995as				
		15205me	15430		1500-1530	Romania, R Romania Intl	11740as	15335as			
					1500-1600	Russia,Voice of Russia WS	4740me	4940me	4975me	6175me	
1400-1500	Singapore,R Corp of Sing	6155do					7275af	7330eu	7425af	7260as	
1400-1500	Sri Lanka, Sri Lanka BC	9730as					9505me	9550af	9585af	9635af	
1400-1430	Switzerland, Swiss R Intl	6165eu	9535eu				11865af	13670af	15205me		
1400-1430	Thailand, Radio	9530as	9655as		1500-1600 sm	Russia,Voice of Russia WS	6005me				
1400-1500	United Kingdom, BBC WS	5990as	6190af	6195as	1500-1600	S Africa, Channel Africa	7155af	9685af			
		9515am	9740as	11750as	1500-1525	S Africa, Channel Africa	17735va	21745va			
		11940af	12095eu	15220am	1500-1600 mtwhfa	Seychelles, FEBA Radio	9810as				
		15565as	15575va	17640va	1500-1545 s	Seychelles, FEBA Radio	11600as				
		17840am	21470af	21660af	1500-1515 wh	Seychelles, FEBA Radio	11870as				
1400-1500	USA, KAIJ Dallas TX	13815am			1500-1530 mt fa	Seychelles, FEBA Radio	11870as				
1400-1500	USA, KJES Mesquite NM	11715na			1500-1600	Singapore,R Corp of Sing	6155do				
1400-1500	USA, KTVN Salt Lk City UT	7510am			1500-1600	United Kingdom, BBC WS	5975as	5990as	6190af	6195as	
1400-1500	USA, Monitor Radio Intl	9355as					9410eu	9515am	9740as	11865am	11940af
1400-1500	USA, Voice of America	6110as	7125as	7215as			12095as	15220am	15400af	15485af	15565va
		9760as	11705as	15205me			17705af	17830af	17840am	21470af	21660af
		15425as			1500-1530	United Kingdom, BBC WS	11860af		17840am	21470af	21660af
1400-1500	USA, WEWN Birmingham AL	9455na	11875na	15665eu	1500-1600	USA, KAIJ Dallas TX	13815am				
1400-1500	USA, WGTG McCaysville GA	9400am			1500-1600	USA, KTVN Salt Lk City UT	7510am				
1400-1500	USA, WHRI Noblesville IN	13760am	15105am		1500-1600	USA, Monitor Radio Intl	9355as				
1400-1500	USA, WJCR Upton KY	7490na			1500-1600	USA, Voice of America	6110as	7125as	7215as	9575me	
1400-1500 mtwhf	USA, WRMI/R Miami Intl	9955am					9645as	9760as	15205as	15395as	
1400-1500	USA, WRNO New Orleans LA	7355am			1500-1600	USA, WEWN Birmingham AL	11875na	13615na	15665eu		
1400-1500 as	USA, WYHA Greenbush ME	15745na			1500-1600	USA, WGTG McCaysville GA	9400am				
1400-1500	USA, WWCR Nashville TN	9475am	12160am	13845am	1500-1600	USA, WHRI Noblesville IN	13760am	15105am			
1400-1500	USA, WYFR Okeechobee FL	11830na	17760na	15685am	1500-1600	USA, WJCR Upton KY	7490na				
1400-1405	Vatican State, Vatican R	9500as	11625as		1500-1600 mtwhf	USA, WRMI/R Miami Intl	9955am				
1400-1500	Zambia, Christian Voice	6065af			1500-1600	USA, WRNO New Orleans LA	7355am				
1400-1500 vl	Zambia, R Zambia/ZNBC 1	4910do			1500-1600 as	USA, WYHA Greenbush ME	15745va				
1415-1430 vl	Cyprus, BRT International	6150do			1500-1600	USA, WWCR Nashville TN	9475am	12160am	13845am	15685am	
1415-1427	Nepal, Radio	5005do			1500-1600	USA, WYFR Okeechobee FL	11830na	15215na	15695eu	17555eu	
1420-1500 as	Palau, KHBN/Voice of Hope	9985as					17760eu	21525af			
1430-1500	Australia, Radio	6060pa	6080pa	9615as	1500-1600 vl	Zambia, Christian Voice	6065af				
		11660as			1500-1600 vl	Zambia, R Zambia/ZNBC 1	4910do				
1430-1500 vl	China, China Radio Intl	6995as	8660as	9880as	1500-1600 vl	Zambia, R Zambia/ZNBC 2	6165do				
1430-1440	India, All India Radio	3945do	6185do	9565do	1515-1530	Vatican State, Vatican R	5880eu	7250eu	9645eu	11810eu	
1430-1440 mtwhf	Indonesia, RRI Uj Pandang	4753do			1520-1530 mtwhf	Estonia, Radio	5925eu				
1430-1500	Mongolia, Voice of	9745eu	12025au		1530-1600	Georgia, Radio	6230me				
1430-1500 mtwhf	Portugal, R Portugal Intl	21515as			1530-1545	India, All India Radio	3945do	6185do	7140do	7410do	
1430-1500	Romania, R Romania Intl	11740as	15335as				9530do	9565do	9685do	9700do	
1430-1500 vl	Zambia, R Zambia/ZNBC 2	6165do			1530-1600	Iran, VOIRI	9635as				
1440-1500	Myanmar, Voice of	5990do			1530-1600 mtwhf	Sri Lanka, Sri Lanka BC	9730as				
					1545-1600	Pakistan, Radio	9425as	9515as	11570af	11955af	
							13590af	15555af			
					1550-1600 a/vl	Vatican State, Vatican R	9940as	11640as			



John Babbis, Silver Spring, MD; Clyde W. Harmon, Anniston, AL; Rev. Michael G. Mayer, Dover, DE; Jim Moats, Ravenna, OH; Bill Scarbrough, Knoxville, TN; Larry van Horn, Brasstown, NC; Alden C. Wires Jr., East Point, GA; BBCMS; BBC *Summary of World Broadcasts*; BBC *On-Air*; Internet Shortwave Newsgroups; *Cumtrem DX: Fine Tuning*.



## FREQUENCIES

1800-1900 irreg	Anguilla, Caribbean Beacon	11775am				1900-2000 irreg	Anguilla, Caribbean Beacon	11775am			
1800-1900	Australia, Radio	6080as	7240pa	7330as	9580pa	1900-2000 m-f/v	Argentina, RAE	15345eu			
		9615as	9860pa	11880pa	12080pa	1900-2000	Australia, Radio	6080pa	7240pa	7330as	9580pa
		2310do						9615as	9860pa	11880pa	12080pa
1800-1900 vl	Australia, VL8A Alice Spg	2310do				1900-2000 vl	Australia, VL8A Alice Spg	2310do			
1800-1900 vl	Australia, VL8K Katherine	2485do				1900-2000 vl	Australia, VL8K Katherine	2485do			
1800-1900 vl	Australia, VL8T Tent Crk	2325do				1900-2000 vl	Australia, VL8T Tent Crk	2325do			
1800-1900	Bangladesh, Bangla Betar	7185eu	9550as	15520do		1900-1920	Brazil, Radio Bras	15265eu			
1800-1825 mtwhfs	Belgium, R Vlaanderen Int	5910eu	9925af			1900-2000	Bulgaria, Radio	9700eu	11720eu		
1800-1900	Brazil, Radio Bras	15265eu				1900-2000	Canada, CFCX Montreal	6005do			
1800-1900	Canada, CFCX Montreal	6005do				1900-2000	Canada, CFCX Toronto	6070do			
1800-1900	Canada, CFRX Toronto	6030do				1900-2000	Canada, CFRX Toronto	6070do			
1800-1900	Canada, CFVP Calgary	6030do				1900-2000	Canada, CFVP Calgary	6030do			
1800-1900	Canada, CHNX Halifax	6130do				1900-2000	Canada, CHNX Halifax	6130do			
1800-1900	Canada, CKZN St John's	6160do				1900-2000	Canada, CKZN St John's	6160do			
1800-1900	Canada, CKZU Vancouver	6160do				1900-2000	Canada, CKZU Vancouver	6160do			
1800-1900	Costa Rica, RF Peace Intl	15050am				1900-2000	China, China Radio Intl	6955af	9440af		
1800-1830	Egypt, Radio Cairo	15255af				1900-2000	Costa Rica, Adv World R	13750am	15460am		
1800-1900	Eqt Guinea, Radio Africa	15186af				1900-2000	Costa Rica, RF Peace Intl	15050am			
1800-1900	India, All India Radio	7410eu	9650eu	9950af	11620af	1900-1930	Cote D' Ivoire, RDTV	11920do			
		11935me	13770as	13780as	15075as	1900-2000 vl	Cyprus, BRT International	6150do			
		11665af				1900-2000	Ecuador, HCJB	11990eu	21455am		
1800-1900 t	Ireland, W Coast R Ireland	3985va				1900-2000	Eqt Guinea, Radio Africa	15186af			
1800-1900 vl	Italy, IRRS	11990na				1900-1930 m	Estonia, Radio	5925eu			
1800-1900	Kuwait, Radio	17815af				1900-1950	Germany, Deutsche Welle	7250af	9640af	9670af	9735af
1800-1900 s	Morocco, RTVM Marocaine	3265af	4855af					11785af	11810af	13790af	
1800-1900	Mozambique, Radio Maputo	6020af	7120af	11655af		1900-2000 s	Germany, R Alpha & Omega	6110eu			
1800-1825	Netherlands, Radio	6070pa				1900-2000	Guatemala, Adv World R	5980am			
1800-1815 mtwhf	New Zealand, R NZ Intl	7485eu	9590me	15220af		1900-1930	Hungary, Radio Budapest	3975eu	5970eu	9835eu	
1800-1830 s	Norway, Radio Norway Intl	4890do				1900-1945	India, All India Radio	7410eu	9650eu	9950me	11620eu
1800-1900 vl	Papua New Guinea, NBC	11815me	11890me	15190me				11935af	13770as	13780as	15075as
1800-1900 vl	Philippines, R Pilipinas	4920eu	5940eu	6110eu	6130eu	1900-1925	Israel, Kol Israel	7465na	9365eu	9435na	15640af
1800-1900	Russia, Voice of Russia WS	7180eu	7210af	7255af	7275af	1900-2000 vl	Italy, IRRS	3985va			
		7305af	7325af	7440eu	9505af	1900-2000	Japan, R Japan/NHK World	6035as	7140pa	7200as	9535na
		9550eu	9585af	9890eu		1900-2000 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do	
		9200af				1900-2000	Kuwait, Radio	11990eu			
		3200af				1900-1930 as	Latvia, Radio	5935eu			
		9500af				1900-1915	Liberia, LCN/R Liberia Int	5100do			
		3255af	6180eu	6190af	6195eu	1900-1930	Mexico, Radio Mexico Intl	9705na			
		9410va	12095eu	15400af	15420af	1900-2000	Netherlands, Radio	6020af	7120af	9895af	11655af
		15485va	15575va	17830af				15315af	17605af		
		5975as	6090va	9510as	21490af	1900-1951 smtwh	New Zealand, R NZ Intl	9795pa			
		13815am				1900-1958 fa	New Zealand, R NZ Intl	9795pa			
		15385na				1900-2000 vl	Papua New Guinea, NBC	4890do			
		15590am				1900-1930 vl	Philippines, R Pilipinas	11815me	11890me	15190me	
		13625au				1900-2000	Romania, R Romania Intl	5955eu	7105af	7195eu	9690eu
		9355eu	9385af	13770eu	18930af	1900-2000	Russia, Voice of Russia WS	4920eu	5940eu	6110eu	6130eu
		6040va	9760me	11920af	11975af			7175af	7180eu	7305af	7325af
		12040af	13710af	15410af	15580af			9585af	9795eu	9890eu	13670af
		11875na	13615na	17695eu		1900-2000	South Korea, R Korea Intl	5975eu	7275as		
		9400am				1900-2000	Swaziland, Trans World R	3200af			
		9495am	13760eu			1900-1920	Switzerland, Swiss R Intl	9905eu			
		15715af				1900-2000	Thailand, Radio	7295eu	9655eu	11905eu	
		7490na				1900-1930	Turkey, Voice of	9445na	7105af	7195eu	
		9465eu				1900-2000	United Kingdom, BBC WS	3255af	6005af	6180eu	6190af
		7355am						9630af	9740as	12095eu	15400af
		9930af						6195va	9410af		
		9475am	12160am	13845am	15685am			15485va	15575va		
		17555eu				1900-2000	USA, KAIJ Dallas TX	17830af			
		7400eu	9840eu			1900-2000	USA, KAIJ Dallas TX	13815am			
		9780do				1900-2000	USA, KTNB Salt Lk City UT	15590am			
		3330af	4965af			1900-2000	USA, KWHR Naalehu HI	13625au			
		4910do				1900-2000	USA, Monitor Radio Intl	9355eu	9385af	13770eu	17510af
		6165do				1900-2000	USA, Voice of America	4950af	6035af	7415af	9525pa
		4828do						11920af	11975va	12040af	13710af
		5993do						9760me	11870pa		
		6150do						15180pa	15410af		
		6010eu	7105eu	7205eu	7210eu	1900-2000	USA, WEWN Birmingham AL	15580af			
		9745eu	12085eu			1900-2000	USA, WGTG McCaysville GA	7425na	13615na	17695eu	
		6020af	7120af	9895af	11655af	1900-2000	USA, WHRI Noblesville IN	9400am			
		15315af	17605af			1900-2000	USA, WHRI Noblesville IN	9495am	13760eu		
		9465eu				1900-2000	USA, WINB Red Lion PA	11740eu			
		6100eu	9720af			1900-2000	USA, WJCR Upton KY	7490na			
		5915eu	6055eu	7345eu		1900-2000 smtwhf	USA, WMLK Bethel PA	9465eu			
		6732do				1900-2000 s	USA, WRMI/R Miami Intl	9955am			
		9445na	13695na			1900-2000	USA, WRNO New Orleans LA	7355am			
		6005af	9630af			1900-2000 mtwhfa	USA, WVHA Greenbush ME	9930va			
		11645af				1900-2000	USA, WWCN Nashville TN	9475am	12160am	13845am	15685am
		7270eu	9570eu			1900-2000	USA, WYFR Okeechobee FL	5810eu	7355af	15566af	
		4810me	4990eu	7480me		1900-1945	USA, WYFR Okeechobee FL	21525af			
		4783do	4835do	5995do		1900-1930	Vatican State, Vatican R	7365eu	9645eu		
		4005eu	5880eu	7250eu		1900-1930	Vietnam, Voice of	7400eu	9840eu		
		9795pa				1900-2000	Zambia, Christian Voice	3330af	4965af		
		6110eu				1900-2000 vl	Zambia, R Zambia/ZNBC 1	4910do			
						1900-2000 vl	Zambia, R Zambia/ZNBC 2	6165do			
						1900-2000 vl	Zimbabwe, Zimbabwe BC	4828do			
						1915-2000	Georgia, Voice of Hope	9310eu			
						1930-2000	Iran, VOIRI	7260af	9022eu		
						1930-2000	Poland, Polish R Warsaw	6035eu	6095eu	7285eu	
						1930-2000	Sweden, Radio	6065eu			
						1930-2000	United Kingdom, BBC WS	11835af			
						1935-1955	Italy, RAI Intl	6015eu	7230eu	9670eu	
						1952-2000 smtwh	New Zealand, R NZ Intl	11735pa			
						1959-2000 fa	New Zealand, R NZ Intl	11735pa			



## FREQUENCIES

2000-2100	Angola, Radio Nacional	3355do	9535do		2100-2130	Albania, R Tirana Intl	7110eu	9515eu	
2000-2100 irreg	Anguilla Caribbean Beacon	11775am			2100-2200 irreg	Anguilla Caribbean Beacon	11775am		
2000-2100	Australia, Radio	6080pa	7240pa	7330as	2100-2200	Australia, Radio	7240pa	9660pa	9850pa
		9860pa	11880pa	12080pa			11855as	12080pa	13605pa
							6080pa	9860as	11880pa
2000-2100 vl	Australia, VL8A Alice Spg	2310do			2100-2130	Australia, Radio	2310do		
2000-2100 vl	Australia, VL8K Katherine	2485do			2100-2130 vl	Australia, VL8A Alice Spg	2310do		
2000-2100 vl	Australia, VL8T Tent Crk	2325do			2100-2130 vl	Australia, VL8K Katherine	2485do		
2000-2100	Canada, CFCX Montreal	6005do			2100-2200 vl	Australia, VL8T Tent Crk	2325do		
2000-2100	Canada, CFRX Toronto	6070do			2100-2130 vl	Australia, VL8T Tent Crk	2325do		
2000-2100	Canada, CFVP Calgary	6030do			2100-2125	Belgium, R Vlaanderen Int	5910eu		
2000-2100	Canada, CHNX Halifax	6130do			2100-2200	Bulgaria, Radio	9700eu	11720eu	
2000-2100	Canada, CKZN St John's	6160do			2100-2200 vl	Cameroon, Radio Garoua	5010do		
2000-2100	Canada, CKZU Vancouver	6160do			2100-2200 vl	Canada, CBC N Quebec Svc	9625do		
2000-2100	Canada, R Canada Intl	5995va	7235eu		2100-2200	Canada, CFCX Montreal	6005do		
2000-2100 a	Canada, R Canada Intl	11690af	13650af	13670af	2100-2200	Canada, CFRX Toronto	6070do		
2000-2100 s	Canada, R Canada Intl	15325af	17820af	17870af	2100-2200	Canada, CFVP Calgary	6030do		
2000-2100	China, China Radio Intl	5220eu	6950eu	9440af	2100-2200	Canada, CHNX Halifax	6130do		
		11715af	15110af	9920eu	2100-2200	Canada, CKZN St John's	6160do		
					2100-2200	Canada, CKZU Vancouver	6160do		
2000-2100	Costa Rica RF Peace Intl	15050am			2100-2200	Canada, R Canada Intl	5995eu	7235eu	
2000-2100 vl	Cyprus, BRT International	6150do			2100-2130 a	Canada, R Canada Intl	11690af	13650af	
2000-2027	Czech Rep. Radio Prague	5930eu	11600au		2100-2130 s	Canada, R Canada Intl	13670af	15150af	17820af
2000-2100	Ecuador, HCJB	11990eu	21455am		2100-2200	China, China Radio Intl	5220eu	6950eu	9920af
2000-2100	Eq Guinea, Radio Africa	15186af			2100-2130	China, China Radio Intl	11715af	15110af	
2000-2030	Finland, YLE/R Finland	6120eu	9855eu		2100-2130	China, China Radio Intl	11715af		
2000-2100	Georgia, Voice of Hope	9310eu			2100-2200	Costa Rica RF Peace Intl	15050am		
2000-2050	Germany, Deutsche Welle	7170eu			2100-2200	Cuba, Radio Havana	9585eu	9620eu	
2000-2030	Ghana, Ghana Broadc Corp	3366do	4915do		2100-2200 vl	Cyprus, BRT International	6150do		
2000-2010	Greece, Voice of	9375eu			2100-2200	Ecuador, HCJB	11990eu	21455am	
2000-2100	Guatemala, Adv World R	5980am			2100-2200	Egypt, Radio Cairo	15375af		
2000-2100	Indonesia, Voice of	9525as			2100-2200	Eq Guinea, Radio Africa	15186af		
2000-2030	Iran, VOIRI	7260af	9022eu		2100-2150	Germany, Deutsche Welle	7115au	9670as	9735af
2000-2100 vl	Italy, IRRS	3955va					11785au	11865af	15135af
2000-2100 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do	2100-2130	Hungary, Radio Budapest	3975eu	5970eu	7250eu
2000-2100	Kuwait, Radio	11990eu			2100-2200	India, All India Radio	7150eu	7410eu	9910eu
2000-2100	Malta, VO Mediterranean	7440eu	12060eu				11620au	11715au	
2000-2030	Mexico, Radio Mexico Intl	9705na			2100-2200 vl	Italy, IRRS	3955va		
2000-2025	Netherlands, Radio	6020af	7120af	9895af	2100-2200	Japan, R Japan/NHK World	13630as		
		15315af	17605af	11655af	2100-2110	Japan, R Japan/NHK World	9860as	11685as	
2000-2100 fa	New Zealand, R NZ Intl	11735pa			2100-2107 vl	Kenya, Kenya Broadc Corp	4885do	4935do	6150do
2000-2100 smtwh	New Zealand, R NZ Intl	11735pa			2100-2200	Lebanon, Voice of Hope	9960va		
2000-2005	Nigeria, FRCN/Radio	3326do	4770do	4990do	2100-2115	Liberia, LCN/R Liberia Int	5100do		
2000-2050	North Korea, R Pyongyang	6575eu	9345as	9640af	2100-2125 mtwhf	Moldova, R Moldova Intl	7520eu		
2000-2100 vl	Papua New Guinea, NBC	4890do			2100-2200 smtwh	New Zealand, R NZ Intl	11735pa		
2000-2025	Poland, Polish R Warsaw	6035eu	6095eu	7285eu	2100-2200	Nigeria, FRCN/Radio	3326do	4770do	4990do
2000-2100	Russia, Voice of Russia WS	5940eu	6110eu	7170eu	2100-2200 vl	Papua New Guinea, NBC	4890do		
		7320eu	7440eu	9890eu	2100-2130 mtwhf	Portugal, R Portugal Intl	6130eu	9780eu	9815eu
					2100-2200	Romania, R Romania Intl	5955eu	5990eu	7105eu
2000-2015	Sierra Leone, SLBS	3316do			2100-2200	Russia, Voice of Russia WS	5940eu	6110eu	7180eu
2000-2100	Slovakia, Adv World Radio	6055eu					7320eu	9890eu	
2000-2015 irreg	Somalia, Radio Mogadishu	6870af			2100-2130	Serbia, Radio Yugoslavia	6100eu	6185eu	
2000-2100 mtwhf	Spain, R Exterior Espana	6125eu	11775af		2100-2200	South Korea, R Korea Intl	3970eu	6480eu	15575eu
2000-2045	Swaziland, Trans World R	3200af			2100-2130	Switzerland, Swiss R Intl	6165eu		
2000-2030	Switzerland, Swiss R Intl	9885af	12075af	13635af	2100-2110	Uganda, Radio	4976do		
2000-2015	Uganda, Radio	4976do			2100-2200	Ukraine, R Ukraine Intl	5905eu	6010eu	6020eu
2000-2100	United Kingdom, BBC WS	3255af	5975as	6005af			7205eu	7290eu	7380eu
		6190af	9410eu	9630af	2100-2200	United Kingdom, BBC WS	3255af	3915as	3955eu
		12095eu	15400af	15575va			6180eu	6190af	5965as
							9410eu	11945as	12095eu
2000-2100	USA, KAIJ Dallas TX	13815am					9630af	15485af	15400af
2000-2100	USA, KTBN Salt Lk City UT	15590am			2100-2130	United Kingdom, BBC WS	11680sa		
2000-2100	USA, KWHR Naalehu HI	11815as			2100-2145	United Kingdom, BBC WS	11815as		
2000-2100	USA, Monitor Radio Intl	9355eu	11550eu	11860pa	2100-2200	USA, KAIJ Dallas TX	13815am		
2000-2100	USA, Voice of America	6035af	7415af	9760me	2100-2200	USA, KTBN Salt Lk City UT	15590am		
		11975af	13710af	15205me	2100-2200	USA, KWHR Naalehu HI	11815as		
		15580af	17725af	17755af	2100-2200	USA, Monitor Radio Intl	9355am	11550eu	13840au
					2100-2200	USA, Voice of America	6035af	6070me	7415af
2000-2100	USA, WEWN Birmingham AL	7425na	13615na	17695eu			9760me	11975af	13710eu
2000-2100	USA, WGTG McCaysville GA	9400am					15410eu	15580eu	17725eu
2000-2100	USA, WHRI Noblesville IN	9495am	13760eu		2100-2200	USA, WEWN Birmingham AL	6890eu	7395na	13615na
2000-2100	USA, WJCR Upton KY	7490na			2100-2200	USA, WGTG McCaysville GA	9400am		
2000-2100 smtwhf	USA, WMLK Bethel PA	9465eu			2100-2200	USA, WHRI Noblesville IN	9495am		
2000-2100 as	USA, WRMI/R Miami Intl	9955am			2100-2200	USA, WINB Red Lion PA	11740eu		
2000-2100	USA, WRNO New Orleans LA	7355am			2100-2200	USA, WJCR Upton KY	7490na		
2000-2100 mtwhfa	USA, WVHA Greenbush ME	9930va			2100-2200 a	USA, WRMI/R Miami Intl	9955am		
2000-2100	USA, WWCR Nashville TN	7435am	9475am	12160am	2100-2200	USA, WRNO New Orleans LA	7355am		
2000-2100	USA, WYFR Okeechobee FL	7355eu	11580eu	15565eu	2100-2200 smtwhf	USA, WVHA Greenbush ME	5850af		
2000-2100	Zambia, Christian Voice	3330af	4965af		2100-2200	USA, WWCR Nashville TN	5070am	7435am	9475am
2000-2100 vl	Zambia, R Zambia/ZNBC 2	6165do			2100-2145	USA, WYFR Okeechobee FL	11580af	15565af	21525eu
2000-2100 vl	Zimbabwe, Zimbabwe BC	4828do			2100-2200	Zambia, Christian Voice	3330af	4965af	
2005-2100	Syria, Radio Damascus	12085na	13610eu		2100-2200 vl	Zambia, R Zambia/ZNBC 1	4910do		
2025-2045	Italy, RAI Intl	7120na	9710na	11840na	2100-2200 vl	Zambia, R Zambia/ZNBC 2	6165do		
2025-2035 mtwhf	Latvia, Radio	5935eu			2100-2200 vl	Zimbabwe, Zimbabwe BC	4828do		
2030-2100	Egypt, Radio Cairo	15375af			2115-2200	Egypt, Radio Cairo	9900eu		
2030-2100	Slovakia, Adv World Radio	9455af			2115-2130	United Kingdom, BBC WS	6175am	15390am	17715am
2030-2100	Sweden, Radio	6065as	13625as		2130-2200	Armenia, Voice of	7480eu	9965eu	11615eu
2030-2045	Thailand, Radio	9655eu	11805as	11905eu	2130-2155	Australia, Radio	13755pa	17795pa	17860pa
2030-2100 as	USA, Voice of America	4950eu			2130-2157	Austria, R Austria Intl	5945eu	6155eu	13730af
2030-2100	Uzbekistan, R Tashkent	4850eu	5995eu	7105eu	2130-2200	Czech Rep. Radio Prague	9440af	11600af	
		11905eu			2130-2200	Ghana, Ghana Broadc Corp	3366do		
2030-2100	Vietnam, Voice of	5940eu	7270eu	7400eu	2130-2200	Guam, AWR/KSDA	15310as		
		12020eu	15010eu	9840eu	2130-2200	Iran, VOIRI	6165au	6175au	
2045-2100	India, All India Radio	7150eu	7410eu	9910au	2130-2200	Sweden, Radio	6065eu	9430af	
		11620eu	11715pa	9950eu		Uzbekistan, R Tashkent	4850eu	5995eu	7105eu
							11905eu		9540eu
					2145-2200 a	Greece, Voice of	9425au		



## FREQUENCIES

2200-2300 irreg	Anguilla, Caribbean Beacon	6090am				2300-0000 irreg	Anguilla, Caribbean Beacon	6090am			
2200-2300	Australia, Radio	11695pa	11855as	13755pa	15365pa	2300-0000	Australia, Radio	9660pa	11695as	12080pa	13755as
		17795pa	17860pa					15365pa	17795pa	17860pa	
2200-2300 vl	Australia, VL8K Katherine	5025do				2300-0000 vl	Australia, VL8K Katherine	5025do			
2200-2300 vl	Australia, VL8T Tent Crk	4910do				2300-0000 vl	Australia, VL8T Tent Crk	4910do			
2200-2300	Canada, CBC N Quebec Svc	9625do				2300-0000	Bulgaria, Radio	7480na	9435na		
2200-2300	Canada, CFCX Montreal	6005do				2300-0000	Canada, CBC N Quebec Svc	9625do			
2200-2300	Canada, CFRX Toronto	6070do				2300-0000	Canada, CFCX Montreal	6005do			
2200-2300	Canada, CFVP Calgary	6030do				2300-0000	Canada, CFRX Toronto	6070do			
2200-2300	Canada, CHNX Halifax	6130do				2300-0000	Canada, CFVP Calgary	6030do			
2200-2300	Canada, CKZN St John's	6160do				2300-0000	Canada, CHNX Halifax	6130do			
2200-2300	Canada, CKZU Vancouver	6160do				2300-0000	Canada, CKZN St John's	6160do			
2200-2300	Canada, R Canada Intl	5960eu	9755am	11705eu	13670am	2300-0000	Canada, CKZU Vancouver	6160do			
2200-2300 as	Canada, R Canada Intl	13670am	13740am	15305am		2300-2330 mtwhf	Canada, R Canada Intl	11940am	13670am	15305am	
2200-2300	China, China Radio Intl	7110eu	7170eu			2300-0000 a	Canada, R Canada Intl	9755am	11940am		
2200-2300	Costa Rica, RF Peace Intl	7385am	15050am			2300-0000 s	Canada, R Canada Intl	11940am	13670am	15305am	
2200-2300	Cuba, Radio Havana	6180na				2300-0000	Costa Rica, Adv World R	5030am	6150am	7375am	9725am
2200-2245	Egypt, Radio Cairo	9900eu						13750am	15460am		
2200-2300	Eqt Guinea, Radio Africa	15186af				2300-0000	Costa Rica, RF Peace Intl	7385am	15050am		
2200-2215	Ghana, Ghana Broadc Corp	4915do				2300-2310	Croatia, Croatian Radio	5895eu	7165eu		
2200-2230	India, All India Radio	7150eu	7410eu	9910eu	9950eu	2300-0000	Egypt, Radio Cairo	9900na			
		11620au	11715au			2300-2350	Germany, Deutsche Welle	5980as	9690as		
2200-2230	Iran, VOIRI	6165au	6175au			2300-0000	Guam, AWR/KSDA	11775as			
2200-2225	Italy, RAI Intl	6150as	9565as	11815pa		2300-0000	Guatemala, Adv World R	11775am			
2200-2300	Lebanon, Voice of Hope	9960va				2300-0000	India, All India Radio	7170as	9705as	9950as	11620as
2200-2215	Liberia, LCN/R Liberia Int	5100do				2300-0000	Lebanon, Voice of Hope	9960va			
2200-2300	Malaysia, Radio	7295do				2300-2315	Liberia, LCN/R Liberia Int	5100do			
2200-2225 mtwhf	Moldova, R Moldova Intl	7520na				2300-0000	Malaysia, Radio	7295do			
2200-2300 smtwh	New Zealand, R NZ Intl	11735pa				2300-0000	Netherlands, Radio	6020na	6165na	9845na	
2200-2215	Nigeria, FRCN/Radio	3326do	4770do	4990do		2300-0000 as	New Zealand, R NZ Intl	15115pa			
2200-2230 s	Norway, Radio Norway Intl	9405sa				2300-2306 smtwh	New Zealand, R NZ Intl	11735pa			
2200-2300 vl	Papua New Guinea, NBC	9675do				2300-2315	Nigeria, FRCN/Radio	3326do	4770do	4990do	
2200-2300	Russia, Voice of Russia WS	5940na	7105na	7125na	7170na	2300-2325	North Korea, R Pyongyang	11700na	13650na		
		7180na	7330na			2300-0000 vl	Papua New Guinea, NBC	9675do			
2200-2215	Sierra Leone, SLBS	3316do				2300-0000	Romania, R Romania Intl	7175na	9510na	9570na	11940na
2200-2300	Slovakia, Adv World Radio	6055af				2300-0000	Russia, Voice of Russia WS	5940na	7105eu	7125na	7180na
2200-2300 as	Spain, R Exterior Espana	6125eu	11775af			2300-2330	Switzerland, Swiss R Intl	6165eu			
2200-2205	Syria, Radio Damascus	12080na	13610eu			2300-0000	Ukraine, R Ukraine Intl	5905eu	6010eu	6020eu	7205eu
2200-2300	Taiwan, VO Free China	5810eu	9985eu					7290eu			
2200-2300	Turkey, Voice of	6135na	7280na	9560na	9655na	2300-0000	United Kingdom, BBC WS	3915as	5965as	5975am	6175am
2200-2300	United Kingdom, BBC WS	5965as	5975am	6180eu	6180eu			5580as	9590na	9915am	11750sa
		6195as	7325va	9410va	9590am			11945as	11955as	15380as	
		9660as	9890as	9915am	11750am	2300-2315	United Kingdom, BBC WS	15400af			
		11955as	12080as	15400af		2300-0000	USA, KAIJ Dallas TX	5810am			
2200-2230	United Kingdom, BBC WS	12095eu				2300-0000	USA, KTNB Salt Lk City UT	15590am			
2200-2300	USA, KAIJ Dallas TX	13815am				2300-0000	USA, KWHR Naalehu HI	17510as			
2200-2300	USA, KTNB Salt Lk City UT	15590am				2300-0000	USA, Monitor Radio Intl	7510af	13770sa		
2200-2300	USA, Monitor Radio Intl	7510eu	13770sa	15665as		2300-0000	USA, Voice of America	7215as	9770as	9890as	11760as
2200-2300	USA, Voice of America	7215as	9770as	9890as	11760as			15185as	15290as	15305as	17735as
		15185as	15290as	15305as	17735as			17820as			
		17820as				2300-0000	USA, WEWN Birmingham AL	5825eu	6890na	7425na	
2200-2230 mtwhf	USA, Voice of America	6035af	7415af	11975af	12080af	2300-0000	USA, WGTG McCaysville GA	5085am			
		13710af				2300-0000	USA, WHRI Noblesville IN	5745am	7315am		
2200-2300	USA, WEWN Birmingham AL	6890na	13615na			2300-0000	USA, WINB Red Lion PA	11950am			
2200-2300	USA, WGTG McCaysville GA	5085am				2300-0000	USA, WJCR Upton KY	7490na			
2200-2300	USA, WHRI Noblesville IN	5745am				2300-0000 mtwhf	USA, WRMI/R Miami Intl	9955am			
2200-2300	USA, WINB Red Lion PA	11950am				2300-0000	USA, WRNO New Orleans LA	7355am			
2200-2300	USA, WJCR Upton KY	7490na				2300-0000 mtwhf	USA, WVHA Greenbush ME	9900af			
2200-2300	USA, WRNO New Orleans LA	7355am				2300-0000	USA, WWCN Nashville TN	3215am	5070am	5935am	
2200-2300 s	USA, WVHA Greenbush ME	5850eu				2300-2315	Vatican State, Vatican R	7305as	9600as	11830na	
2200-2300	USA, WWCN Nashville TN	3215am	5070am	7435am	13845am	2300-0000	New Zealand, R NZ Intl	15115pa			
2200-2300 vl	Zambia, R Zambia/ZNBC 1	4910do				2300-0000	Australia, Radio	13605pa	17880pa		
2203-2210	Croatia, Croatian Radio	5895eu	7165eu	13830eu		2300-2355	Belgium, R Vlaanderen Int	9925sa	11690sa		
2230-2300 as	Canada, R Canada Intl	5960am	6040am	9535am	9755am	2300-0000 as	Canada, R Canada Intl	5960am	9755am	11940am	13670am
		11940am						15305am			
2230-2227	Czech Rep, Radio Prague	7345na	11600na			2300-0000 vl	Ghana, Ghana Broadc Corp	4915af			
2230-2200 mtwhf	USA, WRMI/R Miami Intl	9955am				2300-0000	Iraq, Radio Iraq Intl	6050eu	11890eu		
2240-2250	Greece, Voice of	9425au				2300-0000	Vietnam, Voice of	5940as	7270as	7400as	9840as
2245-2300	Ghana, Ghana Broadc Corp	3366do	4915do					12020as	15010as		
2245-2300	India, All India Radio	7170as	9705as	9950as	11620as	2335-2345	Greece, Voice of	7450sa	9935sa	11640sa	
2245-2300	Vatican State, Vatican R	6065as	7305as	9600as	11830au	2355-0000	Japan, R Japan/NHK World	9860as	11685au		

HAUSER'S HIGHLIGHTS  
NORWAY: R NORWAY INT'L

## Summer English 30 minute broadcasts

UTC	kHz target
0200	7465am, 9560na
0400	7485na
0600	7180eu, 7295au, 9590eu, 13805af
0700	15245me
0800	5170as
(RNI)	

UTC	kHz target
0900	13800as, 15170au
1200	9590eu, 13800na, 13805as, 15605as
1500	9980as, 11840na
1800	7485eu, 9590me, 15220af
2200	9405sa



## SPOTLIGHT ON THE BBC . . . . . BY JIM FRIMMEL

This month, *one time only*, we are providing you with the complete, 24-hour program schedule for all three streams of the BBC World Service. Instead of our usual hour-by-hour format, this listing is by day of the week, so it will not be coordinated with the frequency section as Selected Programming normally is. We think you will find this special edition handy to keep by your radio over the summer season.

Special feature program descriptions have been replaced with generic names in order to keep the program guide current for as long as possible. Program names like "Classical Music Feature" and "Variable Feature" are used for this

purpose.

Did you note there are no longer five streams? The Europe Stream is now combined with the Americas Streams and the South Asia Stream is combined with the Asia Pacific Stream. Within each of the newly designated streams there are still variations of programs for specific targets. For example, at 0330 on Sat, the Americas frequencies get *The World Today* and Europe gets *Weekend*.

Curiously, transmissions to the Falklands do not appear in their Tue/Fri 2130 slots in the newly designated AE stream. If anyone has any info on the discontinuance of this special BBC service, or comments on MT's Selected Programming,

please send email to Jim Frimmel  
(frimmel@startext.net).

### Stream designations:

AE - for listeners in the Americas, Europe (including parts of FSU), the ME, NAF  
AF - For listeners in Africa  
AS - For listeners in Asia.

### Stream program variations:

AE - Variations for Europe, the Americas, the Caribbean  
AF - No Variations  
AS - Variations for East Asia, South Asia

## Sundays

- 0000 Newsdesk. World news and dispatches from overseas and UK correspondents. (am/eu/as)
- 0030 Letter from America. Alistair Cooke shares his inimitable view of contemporary American life. (am/eu)
- 0030 Short Story. Fifteen-minute dramas written by listeners from around the world. (as)
- 0045 Britain Today. News about Britain. (am/eu/as)
- 0100 Newsdesk. See S 0000. (am/eu)
- 0100 World News. Broadcast on the hour of 5, 10, or 15 minutes in length. (as)
- 0110 Pause for Thought. Spiritual reflection. (as)
- 0115 Health Matters. Keeps track of new developments in the world of medical science, as well as ways of keeping fit. (as)
- 0130 Variable Comedy/Quiz Feature. These programs are panel quizzes and other light entertainment in a format heard in America decades ago. (am/eu)
- 0130 World News. See S 0100. (as)
- 0145 Sports Roundup. The latest sports news. (am/eu/as)
- 0200 Newsday. Coverage of the breaking stories and a background briefing on the main news issues of the day. (af/am/eu/as)
- 0230 In Praise of God. Weekly programme of worship and meditation. (af)
- 0230 Music Review. News and views from the world of music. (am/eu)
- 0230 Letter from America. See S 0030. (as)
- 0245 Popular Music Feature. A variable program featuring the world of popular music. (as)
- 0300 World News. See S 0100. (af/am/eu/as)
- 0305 World Business Review. A look back at the previous week's business and a preview of upcoming events. (af/am/eu)
- 0305 Sports Roundup. See S 0145. (as)
- 0315 Sports Roundup. See S 0145. (af/am/eu)
- 0330 African Quiz (1). A monthly test of the listener's knowledge of Africa. (af)
- 0330 Postmark Africa. Expert answers to any question under the sun. (af)
- 0330 From Our Own Correspondent. BBC correspondents comment on the background to the news. (am/eu)
- 0330 Global Business. NEW! Roger White presents this weekly series of interviews, features and discussions with the movers and shakers of the international business community. (as)
- 0400 Newsdesk. See S 0000. (af/am/eu/as)
- 0430 The Art House. No information available. (af)

- 0430 Global Business. See S 0330. (am/eu)
- 0430 From Our Own Correspondent. See S 0330. (as)
- 0500 Newsday. See S 0200. (af/am/eu/as)
- 0530 Postmark Africa. See S 0330. (af)
- 0530 Play of the Week. A different radio drama program each week. (am/eu)
- 0530 Variable Feature. Special features and new series. (as)
- 0600 World News. See S 0100. (af/as)
- 0600 Play of the Week (from 0530). See S 0530. (am/eu)
- 0615 Variable Feature. See S 0530. (af)
- 0615 Letter from America. See S 0030. (as)
- 0630 African News. News bulletins with the latest reports from across the continent. (af)
- 0630 A Jolly Good Show. Dave Lee Travis presents your record requests and dedications in his own unique way. (am/eu)
- 0630 Meridian. One of the topical programs weekly about the world of the arts. (as)
- 0631 African Perspective. A considered view of life and issues facing the African continent. (af)
- 0700 World News. See S 0100. (af/am/eu/as)
- 0715 Short Story. See S 0030. (af)
- 0715 Letter from America. See S 0030. (am/eu)
- 0715 Popular Music Feature. See S 0245. (as)
- 0730 From Our Own Correspondent. See S 0330. (af)
- 0730 Variable Music Feature. Different features of 15, 30, and 45 minutes length with a musical theme. (am/eu)
- 0730 A Jolly Good Show. See S 0630. (as)
- 0800 Variable Comedy/Quiz Feature. See S 0130. (af)
- 0800 World News. See S 0100. (am/eu/as)
- 0810 Pause for Thought. See S 0110. (am/eu/as)
- 0815 Short Story. See S 0030. (am/eu)
- 0815 The Farming World. Reports on new developments from around the world. (as)
- 0830 The Greenfield Collection. See S 0830. (af/am/eu/as)
- 0900 World News. See S 0100. (af/am/eu/as)
- 0905 Write On. See S 0905. (af/am/eu/as)
- 0915 Global Business. See S 0330. (af)
- 0915 From Our Own Correspondent. See S 0330. (am/eu)
- 0915 Short Story. See S 0030. (as)
- 0930 Variable Feature. See S 0530. (as)
- 0945 Sports Roundup. See S 0145. (af/am/eu/as)
- 1000 Newsdesk. See S 0000. (af/am/eu/as)
- 1030 Variable Feature. See S 0530. (af)
- 1030 Global Business. See S 0330. (am/eu)

- 1030 In Praise of God. See S 0230. (as)
- 1100 News Summary. One minute news update. (af)
- 1100 Newsdesk. See S 0000. (am/eu/as)
- 1101 In Praise of God. See S 0230. (af)
- 1130 Play of the Week. See S 0530. (af/as)
- 1130 Anything Goes. A variety of music and much more with Bob Holness. (am/eu)
- 1130 Popular Music Feature. See S 0245. (as)
- 1200 Play of the Week (from 1130). See S 0530. (af/as)
- 1200 World News. See S 0100. (am/eu/as)
- 1205 Write On. See S 0905. (am/eu/as)
- 1215 In Praise of God. See S 0230. (am/eu)
- 1215 Britain Today. See S 0045. (as)
- 1230 Letter from America. See S 0030. (af)
- 1230 Short Story. See S 0030. (as)
- 1230 Variable Feature (EAs). See S 0530. (as)
- 1245 Sports Roundup. See S 0145. (af/am/eu/as)
- 1300 Newshour. See S 1300. (af/am/eu/as)
- 1400 News Summary. See S 1100. (af/am/eu/as)
- 1401 Classical Music Feature. A variable program featuring the world of classical music. (af/as)
- 1401 Variable Feature. See S 0530. (am/eu)
- 1445 Health Matters. See S 0115. (as)
- 1500 News Summary. See S 1100. (af/as)
- 1500 World News. See S 0100. (am/eu)
- 1501 Science Feedback. Listeners' questions, comments and queries about World Service science programs are answered. (af/as)
- 1501 Play of the Week (SAs). See S 0530. (as)
- 1505 Sports Roundup. See S 0145. (am/eu)
- 1515 BBC English. For learners of English. (af/as)
- 1515 Concert Hall. Classical music concerts. (am/eu)
- 1530 Popular Music Feature. See S 0245. (as)
- 1600 World News. See S 0100. (af/as)
- 1600 Europe Today. All the latest news, analysis and comment. (am/eu)
- 1600 Play of the Week (from 1501) (SAs). See S 0530. (as)
- 1615 Concert Hall. See S 1515. (af)
- 1615 Variable Feature. See S 0530. (as)
- 1630 Sunday Sportsworld. The Sunday sports magazine. (am/eu)
- 1700 World News. See S 0100. (af/as)
- 1700 News Summary. See S 1100. (am/eu)
- 1701 Variable Feature. See S 0530. (am/eu)
- 1705 Focus on Africa. Up-to-the-minute reports on the day's events from all over the continent. (af)
- 1705 Write On. See S 0905. (as)
- 1715 Omnibus. Each week a half-hour programme on





- practically any topic under the sun. (as)  
 1730 Weekend. European magazine program co-produced by European broadcasters. (am/eu)  
 1730 Sports Roundup. See S 0145. (as)  
 1740 African News. See S 0630. (af)  
 1745 Sports Roundup. See S 0145. (af/am/eu)  
 1800 Newsdesk. See S 0000. (af/am/eu/as)  
 1830 A Jolly Good Show. See S 0630. (af)  
 1830 Play of the Week. See S 0530. (am/eu)  
 1830 Global Business. See S 0330. (as)  
 1900 World News. See S 0100. (af)  
 1900 Play of the Week (from 1830). See S 0530. (am/eu)  
 1900 News Summary. See S 1100. (as)  
 1901 Postmark Africa. See S 0330. (af)  
 1901 Concert Hall. See S 1515. (as)  
 1930 The Art House. See S 0430. (af)  
 1930 Anything Goes. See S 1130. (am/eu)  
 1945 Variable Feature. See S 0530. (as)  
 2000 Newshour. See S 1300. (af/am/eu/as)  
 2100 World News. See S 0100. (af/am/eu/as)  
 2105 Global Business. See S 0330. (af)  
 2105 Write On. See S 0905. (am/eu/as)  
 2115 Britain Today. See S 0045. (am/eu)  
 2115 Variable Feature. See S 0530. (as)  
 2130 Music Review. See S 0230. (am/eu)  
 2135 Write On. See S 0905. (af)  
 2145 Short Story. See S 0030. (af)  
 2200 Newsdesk. See S 0000. (af/am/eu/as)  
 2230 Classical Music Feature. See S 1401. (af)  
 2230 Health Matters. See S 0115. (am/eu)  
 2230 Letter from America. See S 0030. (as)  
 2245 Sports Roundup. See S 0145. (af/am/eu/as)  
 2300 World News. See S 0100. (am/eu/as)  
 2305 Science View. A look at complex issues and the implications of the latest research findings. (am/eu)  
 2310 Learning Zone. For people who want to learn more about subjects such as science, health, the world and work and literature while practicing English listening skills. (am/eu)  
 2310 East Asia Today. News, analysis, press reviews and reports from BBC correspondents. (as)  
 2325 Pop Short. A five-minute popular music program. (am/eu)  
 2330 In Praise of God. See S 0230. (am/eu)  
 2330 Anything Goes. See S 1130. (as)

## Mondays

- 0000 Chimes of Big Ben (1). Hear the famous bells at this time on the first Monday of each month. (am/eu/as)  
 0000 Newsdesk. See S 0000. (am/eu/as)  
 0030 Short Story. See S 0030. (am/eu)  
 0030 Variable Feature. See S 0530. (as)  
 0045 Britain Today. See S 0045. (am/eu/as)  
 0100 Newsdesk. See S 0000. (am/eu)  
 0100 World News. See S 0100. (as)  
 0110 Pause for Thought. See S 0110. (as)  
 0115 The Farming World. See S 0815. (as)  
 0130 Variable Feature. See S 0530. (am/eu)  
 0130 World News. See S 0100. (as)  
 0145 Sports Roundup. See S 0145. (as)  
 0200 Newsday. See S 0200. (af/am/eu/as)  
 0230 Variable Feature. See S 0530. (af)  
 0230 Meridian. See S 0630. (am/eu)  
 0230 The Works. Alun Lewis looks at the impact of tomorrow's technology. (as)  
 0300 World News. See S 0100. (af/am/eu/as)

- 0305 Write On. See S 0905. (af/am/eu)  
 0315 Sports Roundup. See S 0145. (af/am/eu/as)  
 0330 Network Africa. Breakfast show of news, sport, personalities, music, and listener's comments. (af)  
 0330 Europe Today (Eu). See S 1600. (am/eu)  
 0330 Variable Feature. See S 0530. (am/eu)  
 0330 Off the Shelf. Daily readings from the best of world literature. (as)  
 0345 Classical Music Feature. See S 1401. (as)  
 0400 Newsdesk. See S 0000. (af/am/eu/as)  
 0430 Network Africa. See M 0330. (af)  
 0430 Europe Today (Eu). See S 1600. (am/eu)  
 0430 Variable Feature. See S 0530. (am/eu)  
 0430 Popular Music Feature. See S 0245. (as)  
 0500 Newsday. See S 0200. (af/am/eu/as)  
 0530 Network Africa. See M 0330. (af)  
 0530 Europe Today (Eu). See S 1600. (am/eu)  
 0530 The Works. See M 0230. (am/eu)  
 0530 Variable Feature. See S 0530. (as)  
 0600 World News. See S 0100. (af/am/eu/as)  
 0615 Sports Roundup. See S 0145. (af)  
 0615 Variable Feature. See S 0530. (am/eu)  
 0615 Seven Days. Roundup of the week's news, plus sports highlights, finance and the weather. (as)  
 0630 Network Africa. See M 0330. (af)  
 0630 Omnibus. See S 1715. (am/eu)  
 0630 Popular Music Feature. See S 0245. (as)  
 0700 World News. See S 0100. (af/am/eu/as)  
 0715 Off the Shelf. See M 0330. (af/am/eu/as)  
 0730 Science Feedback. See S 1501. (af)  
 0730 The Vintage Chart Show. Each week a classic Top 20 from the past with Paul Burnett. (am/eu)  
 0730 Variable Feature. See S 0530. (as)  
 0745 BBC English. See S 1515. (af)  
 0745 Variable Feature. See S 0530. (as)  
 0800 Classical Music Feature. See S 1401. (af)  
 0800 World News. See S 0100. (am/eu/as)  
 0810 Pause for Thought. See S 0110. (am/eu/as)  
 0815 Variable Feature. See S 0530. (af/am/eu/as)  
 0830 The Vintage Chart Show. See M 0730. (af)  
 0900 World News. See S 0100. (af/am/eu/as)  
 0905 World Business Report. Latest news from the markets in the Far East, Europe and the USA. (af/am/eu/as)  
 0915 The Works. See M 0230. (af)  
 0915 Learning Zone (EAs). See S 2310. (am/eu/as)  
 0915 Meridian. See S 0630. (as)  
 0930 BBC English. See S 1515. (am/eu)  
 0930 The Works (Am). See M 0230. (am/eu)  
 0930 BBC English (EAs). See S 1515. (as)  
 0945 Sports Roundup. See S 0145. (af/am/eu/as)  
 1000 Newsdesk. See S 0000. (af/am/eu/as)  
 1030 Everywoman. Anna Umbima and Jane Garvey introduce features and reports on the activities of women across the globe. (af)  
 1030 Omnibus. See S 1715. (am/eu)  
 1030 The Works. See M 0230. (as)  
 1100 Newsdesk. See S 0000. (af/am/eu/as)  
 1100 World News (Carib). A 10-minutes news summary for listeners in the Caribbean. (am/eu)  
 1105 Caribbean (Carib). Economic analysis in the region. (am/eu)  
 1130 John Peel. Tracks from newly released albums and singles from the contemporary music scene. (af)  
 1130 Variable Music Feature. See S 0730. (am/eu)  
 1130 BBC English (SAs). See S 1515. (as)  
 1130 Meridian. See S 0630. (as)

- 1200 World News. See S 0100. (af/am/eu/as)  
 1205 World Business Report. See M 0905. (af/am/eu/as/carib)  
 1210 Caribbean Report (Carib). Weekday coverage of current affairs in the Caribbean region with emphasis on political and economic analysis. (am/eu)  
 1215 Britain Today. See S 0045. (af/am/eu/as)  
 1230 Variable Feature. See S 0530. (af)  
 1230 Seven Days. See M 0615. (am/eu)  
 1230 Off the Shelf. See M 0330. (as)  
 1245 Sports Roundup. See S 0145. (af/am/eu/as)  
 1300 Newshour. See S 1300. (af/am/eu/as)  
 1400 News Summary. See S 1100. (af)  
 1400 World News. See S 0100. (am/eu/as)  
 1400 East Asia Today (EAs). See S 2310. (as)  
 1401 Pause for Thought. See S 0110. (af)  
 1405 Outlook. An up-to-the-minute mix of conversation, controversy and color from around the world. (af/am/eu/as)  
 1430 Variable Feature. See S 0530. (af/am/eu/as)  
 1445 Variable Feature. See S 0530. (af)  
 1500 World News. See S 0100. (af/am/eu/as)  
 1500 East Asia Today (EAs). See S 2310. (as)  
 1505 Focus on Africa. See S 1705. (af)  
 1505 Sports Roundup. See S 0145. (am/eu/as)  
 1515 Variable Feature. See S 0530. (am/eu/as)  
 1530 Learning Zone. See S 2310. (af)  
 1530 Variable Music Feature. See S 0730. (am/eu)  
 1530 Meridian. See S 0630. (as)  
 1530 Outlook (EAs). See M 1405. (as)  
 1545 BBC English. See S 1515. (af)  
 1555 Voicebox (EAs). Experts and ordinary people take a light-hearted look at the English language. (as)  
 1600 World News. See S 0100. (af/as)  
 1600 Europe Today. See S 1600. (am/eu)  
 1615 Fast Track. The latest African sports news and action. (af)  
 1615 Multitrack Hit-List. The UK Top 20. (as)  
 1630 World Business Report. See M 0905. (am/eu)  
 1645 The World Today. Examines thoroughly a topical aspect of the international scene. (af)  
 1645 Britain Today. See S 0045. (am/eu/as)  
 1700 World News. See S 0100. (af/am/eu/as)  
 1705 Focus on Africa. See S 1705. (af)  
 1705 World Business Report. See M 0905. (as)  
 1715 The World Today. See M 1645. (am/eu/as)  
 1730 Seven Days. See M 0615. (am/eu)  
 1730 Off the Shelf. See M 0330. (as)  
 1740 African News. See S 0630. (af)  
 1745 Sports Roundup. See S 0145. (af/as)  
 1745 Britain Today. See S 0045. (am/eu)  
 1745 Sports Roundup. See S 0145. (as)  
 1800 Newsdesk. See S 0000. (af/am/eu/as)  
 1830 Focus on Africa. See S 1705. (af)  
 1830 Variable Comedy/Quiz Feature. See S 0130. (am/eu)  
 1830 Andy Kershaw's World of Music. Recordings of diverse music from around the world. (as)  
 1900 News Summary. See S 1100. (af/am/eu)  
 1900 World News. See S 0100. (as)  
 1901 Fast Track. See M 1615. (af)  
 1901 Outlook. See M 1405. (am/eu/as)  
 1925 Pause for Thought. See S 0110. (am/eu)  
 1930 Meridian On Screen. The latest cinematic offerings are discussed. (af)  
 1930 Multitrack Hit-List. See M 1615. (am/eu)





1930 Composer of the Month. In depth looks at classical composers and their music. A different composer is featured each month. (as)  
 2000 Newshour. See S 1300. (af/am/eu/as)  
 2100 News Summary. See S 1100. (af)  
 2100 World News. See S 0100. (am/eu/as)  
 2101 World Business Report. See M 0905. (af)  
 2105 World Business Report. See M 0905. (am/eu/as)  
 2115 Variable Feature. See S 0530. (af)  
 2115 Britain Today. See S 0045. (am/eu)  
 2115 BBC English. See S 1515. (as)  
 2130 Variable Feature. See S 0530. (am/eu)  
 2145 Variable Feature. See S 0530. (as)  
 2200 Newsdesk. See S 0000. (af/am/eu/as)  
 2230 The World Today. See M 1645. (af/am/eu)  
 2230 World Business Report. See M 0905. (as)  
 2245 Sports Roundup. See S 0145. (af/am/eu/as)  
 2300 World News. See S 0100. (am/eu/as)  
 2305 Outlook. See M 1405. (am/eu)  
 2305 East Asia Today. See S 2310. (as)  
 2330 Multitrack Hit-List. See M 1615. (am/eu)  
 2330 The World Today. See M 1645. (as)  
 2345 Seven Days. See M 0615. (as)

## Tuesdays

0000 Newsdesk. See S 0000. (am/eu/as)  
 0030 Variable Feature. See S 0530. (am/eu)  
 0030 Learning Zone. See S 2310. (as)  
 0045 Britain Today. See S 0045. (am/eu/as)  
 0100 Newsdesk. See S 0000. (am/eu)  
 0100 World News. See S 0100. (as)  
 0110 Pause for Thought. See S 0110. (as)  
 0115 The World Today. See M 1645. (as)  
 0130 Seven Days. See M 0615. (am/eu)  
 0130 World News. See S 0100. (as)  
 0145 Variable Music Feature. See S 0730. (am/eu)  
 0145 Sports Roundup. See S 0145. (as)  
 0200 Newsday. See S 0200. (af/am/eu/as)  
 0230 Popular Music Feature. See S 0245. (af)  
 0230 Meridian On Screen. See M 1930. (am/eu)  
 0230 Discovery. In-depth look at scientific research. (as)  
 0245 Seven Days. See M 0615. (af)  
 0300 World News. See S 0100. (af/am/eu/as)  
 0305 World Business Report. See M 0905. (af/am/eu)  
 0315 Sports Roundup. See S 0145. (af/am/eu/as)  
 0330 Network Africa. See M 0330. (af)  
 0330 Europe Today (Eu). See S 1600. (am/eu)  
 0330 The World Today. See M 1645. (am/eu)  
 0330 Off the Shelf. See M 0330. (as)  
 0345 Off the Shelf. See M 0330. (am/eu)  
 0345 Variable Feature. See S 0530. (as)  
 0400 Newsdesk. See S 0000. (af/am/eu/as)  
 0430 Network Africa. See M 0330. (af)  
 0430 Europe Today (Eu). See S 1600. (am/eu)  
 0430 Outlook. See M 1405. (am/eu)  
 0430 Multitrack Hit-List. See M 1615. (as)  
 0455 Take Five. A short series of human interest stories. (am/eu)  
 0500 Newsday. See S 0200. (af/am/eu/as)  
 0530 Network Africa. See M 0330. (af)  
 0530 Discovery. See T 0230. (am/eu)  
 0530 Europe Today (Eu). See S 1600. (am/eu)  
 0530 Omnibus. See S 1715. (as)  
 0600 World News. See S 0100. (af/am/eu/as)  
 0615 Sports Roundup. See S 0145. (af)  
 0615 The World Today. See M 1645. (am/eu/as)  
 0630 Network Africa. See M 0330. (af)  
 0630 Variable Feature. See S 0530. (am/eu)

0630 Composer of the Month. See M 1930. (as)  
 0700 World News. See S 0100. (af/am/eu)  
 0700 World News. See S 0100. (as)  
 0715 Off the Shelf. See M 0330. (af/am/eu/as)  
 0730 Learning Zone. See S 2310. (af)  
 0730 Variable Feature. See S 0530. (am/eu)  
 0730 John Peel. See M 1130. (as)  
 0745 Variable Feature. See S 0530. (af)  
 0800 Composer of the Month. See M 1930. (af)  
 0800 World News. See S 0100. (am/eu/as)  
 0810 Pause for Thought. See S 0110. (am/eu/as)  
 0815 Variable Feature. See S 0530. (am/eu)  
 0815 Concert Hall. See S 1515. (as)  
 0830 Anything Goes. See S 1130. (af)  
 0830 Everywoman. See M 1030. (am/eu)  
 0900 World News. See S 0100. (af/am/eu/as)  
 0905 World Business Report. See M 0905. (af/am/eu/as)  
 0915 Discovery. See T 0230. (af)  
 0915 Learning Zone. See S 2310. (am/eu)  
 0915 BBC English (EAs). See S 1515. (as)  
 0915 Meridian On Screen. See M 1930. (as)  
 0930 BBC English. See S 1515. (am/eu)  
 0930 The World Today (Am). See M 1645. (am/eu)  
 0945 Sports Roundup. See S 0145. (af/am/eu/as)  
 1000 Newsdesk. See S 0000. (af/am/eu/as)  
 1030 Meridian On Screen. See M 1930. (af/am/eu)  
 1030 Popular Music Feature. See S 0245. (as)  
 1100 Newsdesk. See S 0000. (af/am/eu/as)  
 1100 World News (Carib). See M 1100. (am/eu)  
 1105 Caribbean (Carib). See M 1105. (am/eu)  
 1130 Meridian. See S 0630. (af)  
 1130 Variable Feature. See S 0530. (am/eu)  
 1130 BBC English (SAs). See S 1515. (as)  
 1130 Meridian On Screen. See M 1930. (as)  
 1200 World News. See S 0100. (af/am/eu/as)  
 1205 World Business Report. See M 0905. (af/am/eu/as)  
 1210 Caribbean Report (Carib). See M 1210. (am/eu)  
 1215 Britain Today. See S 0045. (af/am/eu/as)  
 1230 Variable Feature. See S 0530. (af)  
 1230 Health Matters. See S 0115. (am/eu)  
 1230 Off the Shelf. See M 0330. (as)  
 1245 Sports Roundup. See S 0145. (af/am/eu/as)

1300 Newshour. See S 1300. (af/am/eu/as)  
 1400 News Summary. See S 1100. (af)  
 1400 World News. See S 0100. (am/eu/as)  
 1400 East Asia Today (EAs). See S 2310. (as)  
 1401 Pause for Thought. See S 0110. (af)  
 1405 Outlook. See M 1405. (af/am/eu/as)  
 1430 Multitrack Hit-List. See M 1615. (af/am/eu)  
 1430 Discovery. See T 0230. (as)  
 1500 World News. See S 0100. (af/am/eu/as)  
 1500 East Asia Today (EAs). See S 2310. (as)  
 1505 Focus on Africa. See S 1705. (af)  
 1505 Sports Roundup. See S 0145. (am/eu/as)  
 1515 Classical Music Feature. See S 1401. (am/eu)  
 1515 Concert Hall. See S 1515. (as)  
 1530 BBC English. See S 1515. (af)  
 1530 The Greenfield Collection. See S 0830. (am/eu)  
 1530 Outlook (EAs). See M 1405. (as)  
 1555 Take Five (EAs). See T 0455. (as)  
 1600 World News. See S 0100. (af/as)  
 1600 Europe Today. See S 1600. (am/eu)  
 1615 Money Focus. African business magazine. (af)  
 1615 Megamix. A youth magazine series which covers new trends, entertainment, sport and other issues. (as)


1630 World Business Report. See M 0905. (am/eu)  
 1645 The World Today. See M 1645. (af)  
 1645 Britain Today. See S 0045. (am/eu/as)  
 1700 World News. See S 0100. (af/am/eu/as)  
 1705 Focus on Africa. See S 1705. (af)  
 1705 World Business Report. See M 0905. (as)  
 1715 The World Today. See M 1645. (am/eu/as)  
 1730 Science Feedback. See S 1501. (am/eu)  
 1730 Off the Shelf. See M 0330. (as)  
 1740 African News. See S 0630. (af)  
 1745 Sports Roundup. See S 0145. (af/am/eu/as)  
 1800 Newsdesk. See S 0000. (af/am/eu)  
 1800 Newsdesk. See S 0000. (as)  
 1830 Focus on Africa. See S 1705. (af)  
 1830 One Planet. Charles Haviland and Richard Black host this new program about development and the environment. (am/eu)  
 1830 Everywoman. See M 1030. (as)  
 1900 News Summary. See S 1100. (af/am/eu)  
 1900 World News. See S 0100. (as)  
 1901 Money Focus. See T 1615. (af)  
 1901 Outlook. See M 1405. (am/eu)  
 1905 Outlook. See M 1405. (as)  
 1925 Pause for Thought. See S 0110. (am/eu)  
 1930 Variable Feature. See S 0530. (af)  
 1930 Megamix. See T 1615. (am/eu)  
 1930 Variable Comedy/Quiz Feature. See S 0130. (as)  
 2000 Newshour. See S 1300. (af/am/eu/as)  
 2100 News Summary. See S 1100. (af)  
 2100 World News. See S 0100. (am/eu/as)  
 2101 World Business Report. See M 0905. (af)  
 2105 World Business Report. See M 0905. (am/eu/as)  
 2115 Seven Days. See M 0615. (af)  
 2115 Britain Today. See S 0045. (am/eu)  
 2115 Variable Feature. See S 0530. (as)  
 2130 Meridian. See S 0630. (af/am/eu)  
 2130 Discovery. See T 0230. (as)  
 2200 Newsdesk. See S 0000. (af/am/eu/as)  
 2230 The World Today. See M 1645. (af/am/eu)  
 2230 World Business Report. See M 0905. (as)  
 2245 Sports Roundup. See S 0145. (af/am/eu/as)  
 2300 World News. See S 0100. (am/eu/as)  
 2305 Outlook. See M 1405. (am/eu)  
 2305 East Asia Today. See S 2310. (as)  
 2330 Megamix. See T 1615. (am/eu)  
 2330 The World Today. See M 1645. (as)  
 2345 Classical Music Feature. See S 1401. (as)

## Wednesdays

0000 Newsdesk. See S 0000. (am/eu/as)  
 0030 The Farming World. See S 0815. (am/eu)  
 0030 Variable Feature. See S 0530. (as)  
 0045 Britain Today. See S 0045. (am/eu/as)  
 0100 Newsdesk. See S 0000. (am/eu)  
 0100 World News. See S 0100. (as)  
 0110 Pause for Thought. See S 0110. (as)  
 0115 The World Today. See M 1645. (as)  
 0130 Discovery. See T 0230. (am/eu)  
 0130 World News. See S 0100. (as)  
 0145 Sports Roundup. See S 0145. (as)  
 0200 Newsday. See S 0200. (af/am/eu/as)  
 0230 The Farming World. See S 0815. (af)  
 0230 Meridian. See S 0630. (am/eu)  
 0230 One Planet. See T 1830. (as)  
 0245 Record News. Focus on the most interesting new releases of classical recordings. (af)  
 0300 World News. See S 0100. (af/am/eu/as)  
 0305 World Business Report. See M 0905. (af/am/eu)



## Synthesized FM Stereo Transmitter



Microprocessor controlled for easy frequency programming using DIP switches, no drift, your signal is rock solid all the time - just like the commercial stations. Audio quality is excellent, connect to the line output of any CD player, tape deck or mixer and you're on the air. Foreign buyers will appreciate the high power output capability of the FM-25; many Caribbean folks use a single FM-25 to cover the whole island! New, improved, clean and hum-free runs on either 12 VDC or 120 VAC. Kit comes complete with case set, whip antenna, 120 VAC power adapter - easy one evening assembly.

FM-25, Synthesized FM Stereo Transmitter Kit ..... \$129.95




## Tunable FM Stereo Transmitter

A lower cost alternative to our high performance transmitters. Offers great value, tunable over the 88-108 MHz FM broadcast band, plenty of power and our manual goes into great detail outlining aspects of antennas, transmitting range and the FCC rules and regulations. Connects to any cassette deck, CD player or mixer and you're on the air, you'll be amazed at the exceptional audio quality! Runs on internal 9V battery or external power from 5 to 15 VDC, or optional 120 VAC adapter. Add our matching case and whip antenna set for a nice finished look.


FM-10A, Tunable FM Stereo Transmitter Kit ..... \$34.95  
CFM, Matching Case and Antenna Set ..... \$14.95

## RF Power Booster Amplifier



Add some serious muscle to your signal, boost power up to 1 watt over a frequency range of 100 KHz to over 1000 MHz! Use as a lab amp for signal generators, plus many foreign users employ the LPA-1 to boost the power of their FM Stereo transmitters, providing radio service through an entire town. Power required 12 to 15 volts DC at 250mA, gain of 38dB at 10 MHz, 10 dB at 1000 MHz. For a neat, professionally finished look, add the optional matching case set.

LPA-1, Power Booster Amplifier Kit ..... \$39.95  
CLPA, Matching Case Set for LPA-1 Kit ..... \$14.95  
LPA-1WT, Fully Wired LPA-1 with Case ..... \$99.95




## Micro FM Wireless Mike

World's smallest FM transmitter. Size of a sugar cube! Uses SMT (Surface Mount Technology) devices and mini electret condenser microphone, even the battery is included. We give you two complete sets of SMT parts to allow for any errors or mishaps-build it carefully and you've got extra SMT parts to build another! Audio quality and pick-up is unbelievable, transmission range up to 300 feet, tunable to anywhere in standard FM band 88 to 108 MHz. 7/8" w x 3/8" h x 3/4" h.

FM-5 Micro FM Wireless Mike Kit ..... \$19.95

## Crystal Controlled Wireless Mike




Super stable, drift free, not affected by temperature, metal or your body! Frequency is set by a crystal in the 2 meter Ham band of 146.535 MHz, easily picked up on any scanner radio or 2 meter rig. Changing the crystal to put frequency anywhere in the 140 to 160 MHz range-crystals cost only five or six dollars. Sensitive electret condenser mike picks up whispers anywhere in a room and transmit up to 1/4 mile. Powered by 3 volt Lithium or pair of watch batteries which are included. Uses the latest in SMT surface mount parts and we even include a few extras in case you sneeze and lose a part!

FM-6, Crystal Controlled FM Wireless Mike Kit ..... \$39.95  
FM-6WT Fully Wired FM-6 ..... \$69.95

**Call for our Free Catalog !**

# RAMSEY

## Super Pro FM Stereo Radio Transmitter



A truly professional frequency synthesized FM Stereo transmitter station in one easy to use, handsome cabinet. Most radio stations require a whole equipment rack to hold all the features

we've packed into the FM-100. Set frequency easily with the Up/Down freq buttons and the big LED digital display. Plus there's input low pass filtering that gives great sound no matter what the source (no more squeals or swishing sounds from cheap CD player inputs!) Peak limiters for maximum 'punch' in your audio - without over modulation. LED bargraph meters for easy setting of audio levels and a built-in mixer with mike and line level inputs. Churches, drive-ins, schools and colleges find the FM-100 to be the answer to their transmitting needs, you will too. No one offers all these features at this price! Kit includes sharp looking metal cabinet, whip antenna and 120 volt AC adapter. Also runs on 12 volts DC.

We also offer a high power export version of the FM-100 that's fully assembled with one watt of RF power, for miles of program coverage. The export version can only be shipped outside the USA, or within the US if accompanied by a signed statement that the unit will be exported.

FM-100, Professional FM Stereo Transmitter Kit ..... \$299.95  
FM-100WT, Fully Wired High Power FM-100 ..... \$429.95

## Speech Descrambler Scrambler



Decode all that gibberish! This is the popular descrambler / scrambler that you've read about in all the Scanner and Electronic magazines. The technology used is known as speech inversion which is compatible with most cordless phones and many police department systems. Hook it up to scanner speaker terminals and you're in business. Easily configured for any use: mike, line level and speaker output inputs are provided. Also communicate in total privacy over telephone or radio, full duplex operation - scramble and unscramble at the same time. Easy to build, all complex circuitry contained in new custom ASIC chip for clear, clean audio. Runs on 9 to 15VDC, RCA phono type jacks. Our matching case set adds a super nice professional look to your kit.

SS-70A, Speech Descrambler/Scrambler Kit ..... \$39.95  
CSS, Custom Matching Case and Knob Set ..... \$14.95  
SS-70AWT, Fully Wired SS-70A with Case ..... \$79.95  
AC12-5, 12 Volt DC Wall Plug Adapter ..... \$9.95


## Tone-Grabber Touch Tone Decoder / Reader



Dialled phone numbers, repeater codes, control codes, anywhere touch-

tones are used, your TG-1 will decode and store any number it hears. A simple hook-up to any radio speaker or phone line is all that is required, and since the TG-1 uses a central office quality decoder and microprocessor, it will decode digits at virtually any speed! A 256 digit non-volatile memory stores numbers for 100 years - even with the power turned off, and an 8 digit LED display allows you to scroll through anywhere in memory. To make it easy to pick out numbers and codes, a dash is inserted between any group or set of numbers that were decoded more than 2 seconds apart. The TG-1 runs from any 7 to 15 volt DC power source and is both voltage regulated and crystal controlled for the ultimate in stability. For stand alone use add our matching case set for a clean, professionally finished product. We have a TG-1 connected up here at the Ramsey factory on the FM radio. It's fun to see the phone numbers that are dialed on the morning radio show! Although the TG-1 requires less than an evening to assemble (and is fun to build, too!), we offer the TG-1 fully wired and tested in matching case for a special price.

TG-1, Tone Grabber Kit ..... \$99.95  
CTG, Matching Case Set for TG-1 Kit ..... \$14.95  
TG-1WT, Fully Wired Tone Grabber with Case ..... \$149.95  
AC12-5, 12 Volt DC Wall Plug Adapter ..... \$9.95




## Mini-Peeper Micro Video Camera

Super small, high quality fully assembled B & W CCD TV camera the size of an ice cube! Provides excellent pictures in low light (2 lux), or use our IR-1 Infra-Red light source to invisibly illuminate an entire room on a pitch black night! Imagine the possibilities... build it into a smoke detector, wall clock, lamp, book, radio. Exact same camera that's in big buck detective catalogues and stores. Kit includes: fully assembled CCD camera module, connectors, interface PC board kit with proper voltage regulation and filtering, hook-up details, even a mini microphone for sensitive sound! Two models available: Wide Angle Lens 3.6mm/12, adjustable focus lens, 92 degree view; Pinhole Lens 5.5mm/14.5, 60 degree view. The Pinhole Lens is physically much flatter and provides even greater depth of focus. The camera itself is 1.2" square. The Wide Angle Lens is about 1" long. Pinhole Lens about 1/2", interface PC board is 1" x 2" and uses RCA jacks for easy hook up to VCRs, TVs or cable runs. Power required is 9 to 14 VDC @ 150 mA. Resolution: 380 x 350 lines. Instruction manual contains ideas on mounting and disguising the Mini-Peeper along with info on adding one of our TV Transmitter kits (such as the MTV-7 unit below) for wireless transmission!

MP-1, Wide Angle Lens CCD TV Camera Outfit ..... \$169.95  
MP-1PH, Pin-Hole Lens CCD TV Camera Outfit ..... \$189.95

## MicroStation Synthesized UHF TV Transmitter



Now you can be in the same league as James Bond. This transmitter is so small that it can fit into a pack of cigarettes - even including a CCD TV camera and battery! Model airplane enthusiasts put the MTV-7A into airplanes for a dynamite view from the cockpit, and the MTV-7A is the transmitter of choice for balloon launches. Transmitter features synthesized, crystal controlled operation for drift-free transmission of both audio and video on your choice of frequencies: Standard UHF TV Channel 52 (which should only be used outside of the USA to avoid violating FCC rules), and 439.25 MHz or 911.25 MHz which are in the amateur ham bands. The 439.25 MHz unit has the nifty advantage of being able to be received on a regular 'cable-ready' TV set tuned to Cable channel 68, or use our ATV-74 converter and receive it on regular TV channel 3. The 911.25 MHz unit is suited for applications where reception on a regular TV is not desired, an ATV-79 must be used for operation. The MTV-7A's output power is almost 100 mW, so transmitting range is pretty much 'line of sight' which can mean many miles! The MTV-7A accepts standard black and white or color video and has its own, on board, sensitive electret microphone. The MTV-7A is available in kit form or fully wired and tested. Since the latest in SMT (Surface Mount Technology) is used to provide for the smallest possible size, the kit version is recommended for experienced builders only. Runs on 12 VDC @ 150 mA and includes a regulated power source for a CCD camera.

MTV-7A, UHF TV Channel 52 Transmitter Kit ..... \$159.95  
MTV-7AWT, Fully Wired Channel 52 Transmitter ..... \$249.95  
MTV-7A4, 439.25 MHz TV Transmitter Kit ..... \$159.95  
MTV-7A4WT, Fully Wired 439.25 MHz Transmitter ..... \$249.95  
MTV-7A9, 911.25 MHz TV Transmitter Kit ..... \$179.95  
MTV-7A9WT, Fully Wired 911.25 MHz Transmitter ..... \$269.95  
ATV-74, 439.25 MHz Converter Kit ..... \$159.95  
ATV-74WT, Fully Wired 439.25 MHz Converter ..... \$249.95  
ATV-79, 911.25 MHz Converter Kit ..... \$179.95  
ATV-79WT, Fully Wired 911.25 MHz Converter ..... \$269.95

**RAMSEY ELECTRONICS, INC.**  
793 Canning Parkway  
Victor, NY 14564

**Order Toll-free: 1-800-446-2295**  
Sorry, no tech info or order status at this number

**Technical Info, Order Status**  
**Call Factory direct: (716) 924-4560**

VISA

MasterCard

Discover

Discover

**ORDERING INFO:** Satisfaction Guaranteed. Examine for 10 days, if not pleased, return in original form for refund. Add \$4.95 for shipping, handling and insurance. Orders under \$20, add \$3.00. NY residents add 7% sales tax. Sorry no CODs. Foreign orders, add 20% for surface mail or use credit card and specify shipping method.





0315 Sports Roundup. See S 0145. (af/am/eu/as)  
 0330 Network Africa. See M 0330. (af)  
 0330 Europe Today (Eu). See S 1600. (am/eu)  
 0330 The World Today. See M 1645. (am/eu)  
 0330 Off the Shelf. See M 0330. (as/am/eu)  
 0345 Science Feedback. See S 1501. (as)  
 0400 Newsdesk. See S 0000. (af/am/eu/as)  
 0430 Network Africa. See M 0330. (af)  
 0430 Europe Today (Eu). See S 1600. (am/eu)  
 0430 Outlook. See M 1405. (am/eu)  
 0430 Megamix. See T 1615. (as)  
 0455 Take Five. See T 0455. (am/eu)  
 0500 Newsday. See S 0200. (af/am/eu/as)  
 0530 Network Africa. See M 0330. (af)  
 0530 Europe Today (Eu). See S 1600. (am/eu)  
 0530 One Planet. See T 1830. (am/eu)  
 0530 Sports International. Live commentaries and interviews, features and discussions. (as)  
 0600 World News. See S 0100. (af/am/eu/as)  
 0615 Sports Roundup. See S 0145. (af)  
 0615 The World Today. See M 1645. (am/eu/as)  
 0630 Network Africa. See M 0330. (af)  
 0630 Sports International. See W 0530. (am/eu)  
 0630 Meridian On Screen. See M 1930. (as)  
 0700 World News. See S 0100. (af/am/eu/as)  
 0715 Off the Shelf. See M 0330. (af/am/eu/as)  
 0730 Variable Feature. See S 0530. (af)  
 0730 Meridian. See S 0630. (am/eu)  
 0730 One Planet. See T 1830. (as)  
 0745 BBC English. See S 1515. (af)  
 0800 Omnibus. See S 1715. (af)  
 0800 World News. See S 0100. (am/eu/as)  
 0810 Pause for Thought. See S 0110. (am/eu/as)  
 0815 Concert Hall. See S 1515. (am/eu)  
 0815 Variable Feature. See S 0530. (as)  
 0830 Sports International. See W 0530. (af)  
 0830 The Vintage Chart Show. See M 0730. (as)  
 0900 World News. See S 0100. (af/am/eu/as)  
 0905 World Business Report. See M 0905. (af/am/eu/as)  
 0915 One Planet. See T 1830. (af)  
 0915 The Farming World. See S 0815. (am/eu)  
 0915 Learning Zone (EAs). See S 2310. (as)  
 0915 Meridian. See S 0630. (as)  
 0930 BBC English. See S 1515. (am/eu)  
 0930 The World Today (Am). See M 1645. (am/eu)  
 0930 BBC English (EAs). See S 1515. (as)  
 0945 Sports Roundup. See S 0145. (af/am/eu/as)  
 1000 Newsdesk. See S 0000. (af/am/eu/as)  
 1030 Meridian On Screen. See M 1930. (af)  
 1030 One Planet. See T 1830. (am/eu/as)  
 1100 Newsdesk. See S 0000. (af/am/eu/as)  
 1100 World News (Carib). See M 1100. (am/eu)  
 1105 Caribbean (Carib). See M 1105. (am/eu)  
 1130 Variable Comedy/Quiz Feature. See S 0130. (af)  
 1130 Sports International. See W 0530. (am/eu)  
 1130 Learning Zone (SAs). See S 2310. (as)  
 1130 Meridian. See S 0630. (as)  
 1145 BBC English (SAs). See S 1515. (as)  
 1200 World News. See S 0100. (af/am/eu/as)  
 1205 Caribbean Report (Carib). See M 1210. (af/am/eu)  
 1215 Britain Today. See S 0045. (af/am/eu/as)  
 1230 Variable Feature. See S 0530. (af)  
 1230 Science Feedback. See S 1501. (am/eu)  
 1230 Off the Shelf. See M 0330. (as)  
 1245 Sports Roundup. See S 0145. (af/am/eu/as)  
 1300 Newshour. See S 1300. (af/am/eu/as)

1400 News Summary. See S 1100. (af)  
 1400 World News. See S 0100. (am/eu/as)  
 1400 East Asia Today (EAs). See S 2310. (as)  
 1401 Pause for Thought. See S 0110. (af)  
 1405 Outlook. See M 1405. (af/am/eu/as)  
 1430 Megamix. See T 1615. (af/am/eu)  
 1430 Sports International. See W 0530. (as)  
 1500 World News. See S 0100. (af/am/eu/as)  
 1500 East Asia Today (EAs). See S 2310. (as)  
 1505 Focus on Africa. See S 1705. (af)  
 1505 Sports Roundup. See S 0145. (am/eu/as)  
 1515 Classical Music Feature. See S 1401. (am/eu)  
 1530 Learning Zone. See S 2310. (af)  
 1530 Everywoman. See M 1030. (am/eu)  
 1530 Meridian On Screen. See M 1930. (as)  
 1530 Outlook (EAs). See M 1405. (as)  
 1545 BBC English. See S 1515. (af)  
 1555 Science View (EAs). See S 2305. (as)  
 1600 World News. See S 0100. (af/as)  
 1600 Europe Today. See S 1600. (am/eu)  
 1615 Talkabout Africa. Telephone conversations with BBC correspondents on late-breaking African events. (af)  
 1615 Multitrack X-Press. New pop records, interviews, news and competitions. (as)  
 1630 World Business Report. See M 0905. (am/eu)  
 1645 The World Today. See M 1645. (af)  
 1645 Britain Today. See S 0045. (am/eu/as)  
 1700 World News. See S 0100. (af/am/eu/as)  
 1705 Focus on Africa. See S 1705. (af)  
 1705 World Business Report. See M 0905. (as)  
 1715 The World Today. See M 1645. (am/eu/as)  
 1730 From Our Own Correspondent. See S 0330. (am/eu)  
 1730 Off the Shelf. See M 0330. (as)  
 1740 African News. See S 0630. (af)  
 1745 Sports Roundup. See S 0145. (af/am/eu/as)  
 1800 Newsdesk. See S 0000. (af/am/eu/as)  
 1830 Focus on Africa. See S 1705. (af)  
 1830 The Works. See M 0230. (am/eu)  
 1830 Variable Feature. See S 0530. (as)  
 1900 News Summary. See S 1100. (af/am/eu)  
 1900 World News. See S 0100. (as)  
 1901 Talkabout Africa. See W 1615. (af)  
 1901 Outlook. See M 1405. (am/eu)  
 1905 Outlook. See M 1405. (as)  
 1925 Pause for Thought. See S 0110. (am/eu)  
 1930 One Planet. See T 1830. (af)  
 1930 Multitrack X-Press. See W 1615. (am/eu)  
 1930 Sports International. See W 0530. (as)  
 2000 Newshour. See S 1300. (af/am/eu/as)  
 2100 News Summary. See S 1100. (af)  
 2100 World News. See S 0100. (am/eu/as)  
 2101 World Business Report. See M 0905. (af)  
 2105 World Business Report. See M 0905. (am/eu/as)  
 2115 Variable Feature. See S 0530. (af)  
 2115 Britain Today. See S 0045. (am/eu)  
 2115 Learning Zone. See S 2310. (as)  
 2130 Discovery. See T 0230. (af)  
 2130 Meridian On Screen. See M 1930. (am/eu)  
 2130 One Planet. See T 1830. (as)  
 2200 Newsdesk. See S 0000. (af/am/eu/as)  
 2230 The World Today. See M 1645. (af/am/eu)  
 2230 World Business Report. See M 0905. (as)  
 2245 Sports Roundup. See S 0145. (af/am/eu/as)  
 2300 World News. See S 0100. (am/eu/as)  
 2305 Outlook. See M 1405. (am/eu)  
 2305 East Asia Today. See S 2310. (as)

2330 Multitrack X-Press. See W 1615. (am/eu)  
 2330 The World Today. See M 1645. (as)  
 2345 Science Feedback. See S 1501. (as)

## Thursdays

0000 Newsdesk. See S 0000. (am/eu/as)  
 0030 From Our Own Correspondent. See S 0330. (am/eu/as)  
 0045 Britain Today. See S 0045. (am/eu/as)  
 0100 Newsdesk. See S 0000. (am/eu)  
 0100 World News. See S 0100. (as)  
 0110 Pause for Thought. See S 0110. (as)  
 0115 The World Today. See M 1645. (as)  
 0130 Omnibus. See S 1715. (am/eu)  
 0130 World News. See S 0100. (as)  
 0145 Sports Roundup. See S 0145. (as)  
 0200 Newsday. See S 0200. (af/am/eu/as)  
 0230 Assignment. A weekly examination of a topical issue. (af)  
 0230 Meridian. See S 0630. (am/eu)  
 0230 Variable Feature. See S 0530. (as)  
 0300 World News. See S 0100. (af/am/eu/as)  
 0305 World Business Report. See M 0905. (af/am/eu)  
 0315 Sports Roundup. See S 0145. (af/am/eu/as)  
 0330 Network Africa. See M 0330. (af)  
 0330 Europe Today (Eu). See S 1600. (am/eu)  
 0330 The World Today. See M 1645. (am/eu)  
 0330 Off the Shelf. See M 0330. (as/am/eu)  
 0345 Classical Music Feature. See S 1401. (as)  
 0400 Newsdesk. See S 0000. (af/am/eu/as)  
 0430 Network Africa. See M 0330. (af)  
 0430 Europe Today (Eu). See S 1600. (am/eu)  
 0430 Outlook. See M 1405. (am/eu)  
 0430 Multitrack X-Press. See W 1615. (as)  
 0500 Newsday. See S 0200. (af/am/eu/as)  
 0530 Network Africa. See M 0330. (af)  
 0530 Europe Today (Eu). See S 1600. (am/eu)  
 0530 Popular Music Feature. See S 0245. (am/eu)  
 0530 Variable Feature. See S 0530. (as)  
 0600 World News. See S 0100. (af/am/eu/as)  
 0615 Sports Roundup. See S 0145. (af)  
 0615 The World Today. See M 1645. (am/eu/as)  
 0630 Network Africa. See M 0330. (af)  
 0630 Meridian. See S 0630. (am/eu/as)  
 0700 World News. See S 0100. (af/am/eu/as)  
 0715 Off the Shelf. See M 0330. (af/am/eu/as)  
 0730 Health Matters. See S 0115. (af)  
 0730 Composer of the Month. See M 1930. (am/eu)  
 0730 BBC English. See S 1515. (as)  
 0745 BBC English. See S 1515. (af)  
 0745 Record News. See W 0245. (as)  
 0800 Variable Feature. See S 0530. (af)  
 0800 World News. See S 0100. (am/eu/as)  
 0810 Pause for Thought. See S 0110. (am/eu/as)  
 0815 Classical Music Feature. See S 1401. (am/eu)  
 0815 From Our Own Correspondent. See S 0330. (as)  
 0830 Popular Music Feature. See S 0245. (af/am/eu)  
 0830 Variable Comedy/Quiz Feature. See S 0130. (as)  
 0900 World News. See S 0100. (af/am/eu/as)  
 0905 World Business Report. See M 0905. (af)  
 0905 World Business Report. See M 0905. (am/eu/as)  
 0915 The Insider's Guide. A look behind the scenes to bring the inside story about Bush House. (af)  
 0915 Popular Music Feature. See S 0245. (am/eu)  
 0915 BBC English (EAs). See S 1515. (as)  
 0915 Variable Feature. See S 0530. (as)  
 0925 Spotlight. Focus on the theater. (af)  
 0930 The Farming World. See S 0815. (af)



0930 BBC English. See S 1515. (am/eu)  
 0930 The World Today (Am). See M 1645. (am/eu)  
 0945 Sports Roundup. See S 0145. (af/am/eu/as)  
 1000 Newsdesk. See S 0000. (af/am/eu/as)  
 1030 Meridian. See S 0630. (af)  
 1030 Discovery. See T 0230. (am/eu)  
 1030 Andy Kershaw's World of Music. See M 1830. (as)  
 1100 Newsdesk. See S 0000. (af/am/eu/as)  
 1100 World News (Carib). See M 1100. (am/eu)  
 1105 Caribbean (Carib). See M 1105. (am/eu)  
 1130 Anything Goes. See S 1130. (af)  
 1130 Learning Zone. See S 2310. (am/eu)  
 1130 BBC English (SAs). See S 1515. (as)  
 1130 Variable Feature. See S 0530. (as)  
 1145 From Our Own Correspondent. See S 0330. (am/eu)  
 1200 World News. See S 0100. (af/am/eu/as)  
 1205 World Business Report. See M 0905. (af/am/eu/as)  
 1210 Caribbean Report (Carib). See M 1210. (am/eu)  
 1215 Britain Today. See S 0045. (af/as)  
 1215 Classical Music Feature. See S 1401. (am/eu)  
 1230 From Our Own Correspondent. See S 0330. (af)  
 1230 Off the Shelf. See M 0330. (as)  
 1245 Sports Roundup. See S 0145. (af/am/eu/as)  
 1300 Newshour. See S 1300. (af/am/eu/as)  
 1400 News Summary. See S 1100. (af)  
 1400 World News. See S 0100. (am/eu/as)  
 1400 East Asia Today (EAs). See S 2310. (as)  
 1401 Pause for Thought. See S 0110. (af)  
 1405 Outlook. See M 1405. (af/am/eu/as)  
 1430 Multitrack X-Press. See W 1615. (af/am/eu)  
 1430 Assignment. See H 0230. (as)  
 1500 World News. See S 0100. (af/am/eu/as)  
 1500 East Asia Today (EAs). See S 2310. (as)  
 1505 Focus on Africa. See S 1705. (af)  
 1505 Sports Roundup. See S 0145. (am/eu/as)  
 1515 Variable Feature. See S 0530. (am/eu)  
 1515 Science Feedback. See S 1501. (as)  
 1530 BBC English. See S 1515. (af)  
 1530 John Peel. See M 1130. (am/eu)  
 1530 Composer of the Month. See M 1930. (as)  
 1530 Outlook (EAs). See M 1405. (as)  
 1555 Take Five (EAs). See T 0455. (as)  
 1600 World News. See S 0100. (af)  
 1600 Europe Today. See S 1600. (am/eu)  
 1600 World News. See S 0100. (as)  
 1615 Jive Zone. Get in the groove with all the latest sounds on the Afro music scene. (af)  
 1615 Variable Feature. See S 0530. (as)  
 1630 World Business Report. See M 0905. (am/eu)  
 1645 The World Today. See M 1645. (af)  
 1645 Britain Today. See S 0045. (am/eu/as)  
 1700 World News. See S 0100. (af/am/eu/as)  
 1705 Focus on Africa. See S 1705. (af)  
 1705 World Business Report. See M 0905. (am/eu/as)  
 1715 The World Today. See M 1645. (am/eu/as)  
 1730 Classical Music Feature. See S 1401. (am/eu)  
 1730 Off the Shelf. See M 0330. (as)  
 1740 African News. See S 0630. (af)  
 1745 Sports Roundup. See S 0145. (af/am/eu/as)  
 1800 Newsdesk. See S 0000. (af/am/eu/as)  
 1830 Focus on Africa. See S 1705. (af)  
 1830 Assignment. See H 0230. (am/eu)  
 1830 Variable Feature. See S 0530. (as)  
 1900 News Summary. See S 1100. (af/am/eu)

1900 World News. See S 0100. (as)  
 1901 Assignment. See H 0230. (af)  
 1901 Outlook. See M 1405. (am/eu)  
 1905 Outlook. See M 1405. (as)  
 1925 Pause for Thought. See S 0110. (am/eu)  
 1930 The Works. See M 0230. (af)  
 1930 John Peel. See M 1130. (am/eu)  
 1930 Meridian On Screen. See M 1930. (as)  
 2000 Newshour. See S 1300. (af/am/eu/as)  
 2100 News Summary. See S 1100. (af)  
 2100 World News. See S 0100. (am/eu/as)  
 2101 World Business Report. See M 0905. (af)  
 2105 World Business Report. See M 0905. (am/eu/as)  
 2115 From Our Own Correspondent. See S 0330. (af)  
 2115 Britain Today. See S 0045. (am/eu)  
 2115 BBC English. See S 1515. (as)  
 2130 Meridian. See S 0630. (af/am/eu)  
 2130 Assignment. See H 0230. (as)  
 2200 Newsdesk. See S 0000. (af/am/eu/as)  
 2230 The World Today. See M 1645. (af/am/eu)  
 2230 World Business Report. See M 0905. (as)  
 2245 Sports Roundup. See S 0145. (af/am/eu/as)  
 2300 World News. See S 0100. (am/eu/as)  
 2305 Outlook. See M 1405. (am/eu)  
 2305 East Asia Today. See S 2310. (as)  
 2330 The Vintage Chart Show. See M 0730. (am/eu)  
 2330 The World Today. See M 1645. (as)  
 2345 Health Matters. See S 0115. (as)

## Fridays

0000 Newsdesk. See S 0000. (am/eu/as)  
 0030 Classical Music Feature. See S 1401. (am/eu)  
 0030 BBC English. See S 1515. (as)  
 0045 Britain Today. See S 0045. (am/eu/as)  
 0100 Newsdesk. See S 0000. (am/eu)  
 0100 World News. See S 0100. (as)  
 0110 Pause for Thought. See S 0110. (as)  
 0115 The World Today. See M 1645. (as)  
 0130 The Works. See M 0230. (am/eu)  
 0130 World News. See S 0100. (as)  
 0145 Sports Roundup. See S 0145. (as)  
 0200 Newshour. See S 0200. (af/am/eu/as)  
 0230 Variable Feature. See S 0530. (af)  
 0230 Focus on Faith. Alison Hilliard talks to church leaders about their hopes for the future. (am/eu)  
 0230 Assignment. See H 0230. (as)  
 0300 World News. See S 0100. (af/am/eu/as)  
 0305 World Business Report. See M 0905. (af/am/eu)  
 0315 Sports Roundup. See S 0145. (af/am/eu/as)  
 0330 Network Africa. See M 0330. (af)  
 0330 Europe Today (Eu). See S 1600. (am/eu)  
 0330 The World Today. See M 1645. (am/eu)  
 0330 Off the Shelf. See M 0330. (as)  
 0345 Off the Shelf. See M 0330. (am/eu)  
 0345 BBC English. See S 1515. (as)  
 0400 Newsdesk. See S 0000. (af/am/eu/as)  
 0430 Network Africa. See M 0330. (af)  
 0430 Outlook. See M 1405. (am/eu)  
 0430 John Peel. See M 1130. (as)  
 0455 Science View. See S 2305. (am/eu)  
 0500 Newshour. See S 0200. (af/am/eu/as)  
 0530 Network Africa. See M 0330. (af)  
 0530 Assignment. See H 0230. (am/eu)  
 0530 Europe Today (Eu). See S 1600. (am/eu)  
 0530 Focus on Faith. See F 0230. (as)  
 0600 World News. See S 0100. (af/am/eu/as)  
 0615 Sports Roundup. See S 0145. (af)  
 0615 The World Today. See M 1645. (am/eu/as)  
 0630 Network Africa. See M 0330. (af)

0630 Variable Feature. See S 0530. (am/eu)  
 0630 Music Review. See S 0230. (as)  
 0700 World News. See S 0100. (af/am/eu/as)  
 0715 Off the Shelf. See M 0330. (af/am/eu)  
 0715 Off the Shelf. See M 0330. (as)  
 0730 BBC English. See S 1515. (af)  
 0730 Music Review. See S 0230. (am/eu)  
 0730 Andy Kershaw's World of Music. See M 1830. (as)  
 0800 Variable Comedy/Quiz Feature. See S 0130. (af)  
 0800 World News. See S 0100. (am/eu/as)  
 0810 Pause for Thought. See S 0110. (am/eu/as)  
 0815 Classical Music Feature. See S 1401. (am/eu/as)  
 0830 Popular Music Feature. See S 0245. (af)  
 0830 John Peel. See M 1130. (am/eu)  
 0830 Everywoman. See M 1030. (as)  
 0900 World News. See S 0100. (af/am/eu/as)  
 0905 World Business Report. See M 0905. (af/am/eu/as)  
 0915 Focus on Faith. See F 0230. (af)  
 0915 Learning Zone. See S 2310. (am/eu)  
 0915 BBC English (EAs). See S 1515. (as)  
 0915 Meridian. See S 0630. (as)  
 0930 BBC English. See S 1515. (am/eu)  
 0945 Sports Roundup. See S 0145. (af/am/eu/as)  
 1000 Newsdesk. See S 0000. (af/am/eu/as)  
 1030 Music Review. See S 0230. (af)  
 1030 Assignment. See H 0230. (am/eu)  
 1030 Focus on Faith. See F 0230. (as)  
 1100 Newsdesk. See S 0000. (af/am/eu/as)  
 1100 World News (Carib). See M 1100. (am/eu)  
 1105 Caribbean (Carib). See M 1105. (am/eu)  
 1130 Andy Kershaw's World of Music. See M 1830. (af)  
 1130 Focus on Faith. See F 0230. (am/eu)  
 1130 BBC English (SAs). See S 1515. (as)  
 1130 Meridian. See S 0630. (as)  
 1200 World News. See S 0100. (af/am/eu/as)  
 1205 World Business Report. See M 0905. (af/am/eu/as)  
 1210 Caribbean Report (Carib). See M 1210. (am/eu)  
 1215 Britain Today. See S 0045. (af/as)  
 1215 Variable Feature. See S 0530. (am/eu)  
 1230 Classical Music Feature. See S 1401. (af)  
 1230 Off the Shelf. See M 0330. (as)  
 1245 Sports Roundup. See S 0145. (af/am/eu/as)  
 1300 Newshour. See S 1300. (af/am/eu/as)  
 1400 News Summary. See S 1100. (af)  
 1400 World News. See S 0100. (am/eu/as)  
 1400 East Asia Today (EAs). See S 2310. (as)  
 1401 Pause for Thought. See S 0110. (af)  
 1405 Outlook. See M 1405. (af/am/eu/as)  
 1430 Multitrack Alternative. Latest developments on the British music scene. (af/am/eu)  
 1430 Science in Action. The latest in science and

## PROPAGATION FORECASTING

JACQUES D'AVIGNON, VE3VIA  
 965 LINCOLN DRIVE  
 KINGSTON, ON K7M 4Z3  
 CANADA

DISTRIBUTOR ASAPS PROPAGATION SOFTWARE  
 E-MAIL: MONITOR@LIMESTONE.KOSONE.COM





technology. (as)  
1500 World News. See S 0100. (af/am/eu/as)  
1500 East Asia Today (EAs). See S 2310. (as)  
1505 Focus on Africa. See S 1705. (af)  
1505 Football Extra. A review of the week's action and the upcoming weekend matches. (am/eu/as)  
1515 Variable Feature. See S 0530. (am/eu)  
1515 The Insider's Guide. See H 0915. (as)  
1525 Spotlight. See H 0925. (as)  
1530 BBC English. See S 1515. (af)  
1530 Science in Action. See F 1430. (am/eu)  
1530 Meridian. See S 0630. (as)  
1530 Outlook (EAs). See M 1405. (as)  
1555 Spotlight (EAs). See H 0925. (as)  
1600 World News. See S 0100. (af/as)  
1600 Europe Today. See S 1600. (am/eu)  
1615 African Perspective. See S 0631. (af)  
1615 Multitrack Alternative. See F 1430. (as)  
1630 World Business Report. See M 0905. (am/eu)  
1645 The World Today. See M 1645. (af)  
1645 Britain Today. See S 0045. (am/eu/as)  
1700 World News. See S 0100. (af/am/eu/as)  
1705 Focus on Africa. See S 1705. (af)  
1705 World Business Report. See M 0905. (as)  
1715 The World Today. See M 1645. (am/eu/as)  
1730 The Insider's Guide. See H 0915. (am/eu)  
1730 Off the Shelf. See M 0330. (as)  
1740 African News. See S 0630. (af)  
1740 Music Brief. A five-minute interlude. (am/eu)  
1745 Sports Roundup. See S 0145. (af/am/eu/as)  
1800 Newsdesk. See S 0000. (af/am/eu/as)  
1830 Focus on Africa. See S 1705. (af)  
1830 Focus on Faith. See F 0230. (am/eu)  
1830 Science in Action. See F 1430. (as)

1900 News Summary. See S 1100. (af/am/eu)  
1900 World News. See S 0100. (as)  
1901 African Perspective. See S 0631. (af)  
1901 Outlook. See M 1405. (am/eu)  
1905 Outlook. See M 1405. (as)  
1925 Pause for Thought. See S 0110. (am/eu)  
1930 Science in Action. See F 1430. (af)  
1930 Multitrack Alternative. See F 1430. (am/eu)  
1930 Focus on Faith. See F 0230. (as)  
2000 Newshour. See S 1300. (af/am/eu/as)  
2100 News Summary. See S 1100. (af)  
2100 World News. See S 0100. (am/eu/as)  
2101 World Business Report. See M 0905. (af)  
2105 World Business Report. See M 0905. (am/eu/as)  
2115 Classical Music Feature. See S 1401. (af)  
2115 Britain Today. See S 0045. (am/eu)  
2115 The Farming World. See S 0815. (as)  
2130 People and Politics. Background to the British political scene. (af/am/eu)  
2130 The Works. See M 0230. (as)  
2200 Newsdesk. See S 0000. (af/am/eu/as)  
2230 The World Today. See M 1645. (af/am/eu)  
2230 World Business Report. See M 0905. (as)  
2245 Sports Roundup. See S 0145. (af/am/eu/as)  
2300 World News. See S 0100. (am/eu/as)  
2305 Outlook. See M 1405. (am/eu)  
2305 The Insider's Guide. See H 0915. (as)  
2315 Popular Music Feature. See S 0245. (as)  
2330 Multitrack Alternative. See F 1430. (am/eu)  
2330 The World Today. See M 1645. (as)  
2345 Record News. See W 0245. (as)

0030 From the Weeklies. See A 0030. (am/eu/as)  
0045 Britain Today. See S 0045. (am/eu/as)  
0100 Newsdesk. See S 0000. (am/eu/as)  
0110 Pause for Thought. See S 0110. (as)  
0115 The World Today. See M 1645. (as)  
0130 Variable Feature. See S 0530. (am/eu)  
0130 World News. See S 0100. (as)  
0145 The Insider's Guide. See H 0915. (am/eu)  
0145 Sports Roundup. See S 0145. (as)  
0155 Spotlight. See H 0925. (am/eu)  
0200 Newsday. See S 0200. (af/(am/eu/as)  
0230 People and Politics. See F 2130. (af/am/eu/as)  
0300 World News. See S 0100. (af/am/eu/as)  
0305 World Business Report. See M 0905. (af/am/eu)  
0315 Sports Roundup. See S 0145. (af/am/eu/as)  
0330 Focus on Faith. See F 0230. (af)  
0330 The World Today. See M 1645. (am/eu)  
0330 Weekend (Eu). See S 1730. (am/eu)  
0330 The Vintage Chart Show. See M 0730. (as)  
0345 Off the Shelf. See M 0330. (am/eu)  
0400 Newsdesk. See S 0000. (af/am/eu/as)  
0430 African News. See S 0630. (af)  
0430 Outlook. See M 1405. (am/eu)  
0430 Multitrack Alternative. See F 1430. (as)  
0431 African Quiz (1). See S 0330. (af)  
0431 This Week and Africa. A roundup of the week's political developments across the continent. (af)  
0455 Music Brief. See F 1740. (am/eu)  
0500 Newsday. See S 0200. (af/am/eu/as)  
0530 African News. See S 0630. (af)  
0530 Science in Action. See F 1430. (am/eu)  
0530 Variable Feature. See S 0530. (as)  
0531 Talkabout Africa. See W 1615. (af)  
0600 World News. See S 0100. (af/am/eu/as)  
0615 Letter from America. See S 0030. (af)  
0615 The World Today. See M 1645. (am/eu/as)  
0630 African News. See S 0630. (af)  
0630 Meridian. See S 0630. (am/eu/as)  
0631 African Quiz (1). See S 0330. (af)  
0631 This Week and Africa. See A 0431. (af)

0700 World News. See S 0100. (af/am/eu/as)  
0715 From the Weeklies. See A 0030. (af)  
0715 From the Weeklies. See A 0030. (am/eu/as)  
0730 Science in Action. See F 1430. (af)  
0730 Variable Comedy/Quiz Feature. See S 0130. (am/eu)  
0730 People and Politics. See F 2130. (as)  
0800 Everywoman. See M 1030. (af)  
0800 World News. See S 0100. (am/eu/as)  
0810 Pause for Thought. See S 0110. (am/eu/as)  
0815 Variable Feature. See S 0530. (am/eu)  
0815 Classical Music Feature. See S 1401. (as)  
0830 A Jolly Good Show. See S 0630. (af)  
0830 Andy Kershaw's World of Music. See M 1830. (am/eu)  
0830 Variable Feature. See S 0530. (as)  
0900 World News. See S 0100. (af/am/eu/as)  
0905 World Business Report. See M 0905. (af/am/eu)  
0905 World Business Report. See M 0905. (as)  
0915 BBC English. See S 1515. (af)  
0915 The Works. See M 0230. (am/eu)  
0915 Omnibus. See S 1715. (as)  
0930 BBC English. See S 1515. (af)  
0945 Sports Roundup. See S 0145. (af/am/eu/as)  
1000 Newsdesk. See S 0000. (af/am/eu/as)  
1030 BBC English. See S 1515. (af)  
1030 Variable Feature. See S 0530. (am/eu)  
1030 Anything Goes. See S 1130. (as)

1100 News Summary. See S 1100. (af)  
1100 Newsdesk. See S 0000. (am/eu/as)  
1101 Variable Feature. See S 0530. (af)  
1130 Jive Zone. See H 1615. (af)  
1130 People and Politics. See F 2130. (am/eu)  
1130 Music Review. See S 0230. (as)  
1200 World News. See S 0100. (af/am/eu/as)  
1205 World Business Review. See S 0305. (af/am/eu/as)  
1215 Variable Feature. See S 0530. (af)  
1215 A Jolly Good Show. See S 0630. (am/eu)  
1215 Britain Today. See S 0045. (as)  
1245 Record News. See W 0245. (af)  
1245 Short Story. See S 0030. (am/eu)  
1245 Variable Comedy/Quiz Feature. See S 0130. (as)

1300 Newshour. See S 1300. (af/am/eu/as)  
1400 World News. See S 0100. (af/am/eu/as)  
1405 Sportsworld. See A 1405. (af/am/eu/as)  
1500 World News. See S 0100. (af/am/eu/as)  
1505 Sportsworld. See A 1405. (af/am/eu/as)  
1600 World News. See S 0100. (af/am/eu/as)  
1615 Sportsworld. See A 1405. (af/am/eu/as)  
1700 World News. See S 0100. (af/am/eu/as)  
1705 Focus on Africa. See S 1705. (af)  
1705 World Business Review. See S 0305. (as)  
1715 From Our Own Correspondent. See S 0330. (am/eu)  
1715 A Jolly Good Show. See S 0630. (as)  
1740 African News. See S 0630. (af)  
1745 Sports Roundup. See S 0145. (af/am/eu/as)  
1800 Newsdesk. See S 0000. (af/am/eu/as)  
1830 Andy Kershaw's World of Music. See M 1830. (af)  
1830 Science in Action. See F 1430. (am/eu)  
1830 Popular Music Feature. See S 0245. (as)

1900 News Summary. See S 1100. (af/as)  
1900 World News. See S 0100. (am/eu)  
1901 Omnibus. See S 1715. (af)  
1901 Variable Comedy/Quiz Feature. See S 0130. (am/eu)  
1901 From Our Own Correspondent. See S 0330. (as)  
1930 Meridian. See S 0630. (af)  
1930 Variable Feature. See S 0530. (am/eu)  
1930 In Praise of God. See S 0230. (as)  
1945 Variable Feature. See S 0530. (am/eu)  
2000 Newshour. See S 1300. (af/(am/eu/as)  
2100 World News. See S 0100. (af/am/eu/as)  
2105 World Business Review. See S 0305. (af/am/eu/as)  
2115 Health Matters. See S 0115. (af)  
2115 Britain Today. See S 0045. (am/eu)  
2115 Classical Music Feature. See S 1401. (as)  
2130 From Our Own Correspondent. See S 0330. (af)  
2130 Meridian. See S 0630. (am/eu)  
2130 The Greenfield Collection. See S 0830. (as)  
2200 Newsdesk. See S 0000. (af/am/eu/as)  
2230 Letter from America. See S 0030. (af)  
2230 Play of the Week. See S 0530. (am/eu)  
2230 From the Weeklies. See A 0030. (as)  
2245 Sports Roundup. See S 0145. (af/as)  
2300 Play of the Week (from 2230). See S 0530. (am/eu)  
2300 News Summary. See S 1100. (as)  
2301 From Our Own Correspondent. See S 0330. (as)  
2330 Andy Kershaw's World of Music. See M 1830. (am/eu)  
2330 Science in Action. See F 1430. (as)

## Saturdays

0000 Newsdesk. See S 0000. (am/eu/as)



# PROPAGATION CONDITIONS, UNITED STATES

## THE FLUX AND THE SSN

By Jacques d'Avignon

monitor@limestone.kosone.com

### OPTIMUM WORKING FREQUENCIES (MHz)

For the Period 15 May to 14 June 1997 Flux=79 SSN=15

At the top of the optimum working frequency (OWF) table on this page, you will find the following terms: "Flux" and "SSN." By popular demand, over the next two months I will attempt an introductory explanation of what the flux and sunspot numbers (SSN), as well as "A" and "K" indices mean, and how they are used in propagation prediction.

Please remember that the flux and SSN numbers you see above the OWF table are the "forecasted" values that have been used to prepare the table, since it is produced ahead of the magazine date. One such value is the sunspot number, which is based upon event data which have been observed and listed since July of 1749. No, that is not a typo!

Daily observations are made of the face of the sun, and these observations are recorded. This number is not the *exact* number of dark spots on the face of the sun, but a mathematical approximation, as the spots appear in groups. The number of groups are also included in the calculation. The daily sunspot number (also called the Wolf number) is calculated as follows:

$$R=k(10g+f)$$

In which:

R = Wolf's relative sunspot number

k = a factor that is used so that all observations are comparable to each other

g = the number of groups of sunspots

f = the number of spots on the face of the sun

**Warning:** never look at the sun to try and see the spots—believe me, they exist!

Here are two definitions that have been elaborated by IPS in Australia and might be of some help:

"Sunspots: Relatively cool regions in the solar photosphere that appear dark. They contain intense magnetic fields which provide the energy for solar flares. Sunspots occur in groups.

"Sunspot Number: An index of solar activity related to the number of sunspots and sunspot groups present on the sun."

If you look at the definition of "sunspots" above, you will see that these spots "contain intense magnetic fields which provide the energy for solar flares." These flares and their after-effects cause disruptions in the ionospheric layers upon which long-distance shortwave transmissions depend.

Over the years we have become very sophisticated; looking at the sun every day to see how many pimples it had, became tedious. After WWII, someone realized the sun was an immense radio transmitter and had a strong, steady signal on 10.7 cm (2.800 MHz). So instead of looking at the sun, why not listen to it on its best frequency? This new technique—listening to the solar flux—was implemented in

UTC	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
TO/FROM US WEST COAST																								
SOUTH AMERICA	19	16	16	16	16	14	13	12	12	12	10	10	11	13	15	16	17	17	18	19	19	20	19	20
WESTERN EUROPE	12	10	9	9	10	10	10	9	9	0	0	0	0	11	13	15	16	16	15	15	15	16	15	14
EASTERN EUROPE (P)	11	12	13	14	14	15	12	0	0	0	0	0	0	12	13	14	15	15	15	15	14	13	0	0
MEDITERRANEAN	14	14	0	7	7	0	11	0	0	0	0	0	0	14	15	16	17	17	18	18	18	17	16	15
MIDDLE EAST (P)	13	14	15	16	16	15	0	0	0	0	0	0	0	12	13	15	17	18	17	15	14	0	13	13
CENTRAL AFRICA	12	12	10	9	8	8	11	11	0	0	0	0	0	15	17	18	19	19	19	19	16	0	0	12
SOUTH AFRICA	0	10	9	8	8	7	11	11	11	0	0	0	0	15	17	18	18	18	14	0	0	0	0	0
SOUTH EAST ASIA (P)	18	17	17	17	17	17	16	14	0	0	0	10	10	11	12	13	15	15	14	14	0	0	0	16
FAR EAST	16	15	15	16	16	16	15	13	11	10	10	10	10	11	12	12	12	12	12	13	14	15	16	16
AUSTRALIA	20	20	20	20	20	19	17	15	14	12	12	12	12	11	11	12	12	0	0	0	0	19	19	20
TO/FROM US MIDWEST																								
SOUTH AMERICA	16	15	14	15	13	12	11	11	11	10	9	10	12	13	15	16	17	18	18	18	18	18	18	19
WESTERN EUROPE	14	12	11	10	11	11	10	9	9	0	0	12	13	15	16	16	17	17	16	16	16	17	17	16
EASTERN EUROPE	11	11	12	13	13	11	0	0	0	0	0	0	12	13	14	15	15	15	15	16	15	14	12	11
MEDITERRANEAN	14	14	14	13	13	11	10	0	0	0	0	0	14	15	16	17	17	17	17	17	17	16	15	14
MIDDLE EAST (P)	13	13	15	16	14	0	0	0	0	0	0	0	13	14	16	17	18	18	19	17	15	14	14	13
CENTRAL AFRICA	12	12	10	9	8	8	11	10	0	0	0	0	14	15	17	18	19	19	19	19	16	13	12	12
SOUTH AFRICA	10	10	9	8	8	7	11	11	11	0	0	0	13	15	17	18	19	18	14	0	0	0	0	0
SOUTH EAST ASIA (P)	16	17	17	17	16	14	0	0	0	0	0	10	11	12	14	15	15	15	14	14	0	0	0	16
FAR EAST	16	16	16	16	16	15	13	11	10	9	9	10	10	12	13	13	13	13	13	14	15	15	16	16
AUSTRALIA	19	19	19	19	18	16	14	13	12	12	12	11	11	12	12	12	0	0	0	0	0	18	19	19
TO/FROM US EAST COAST																								
SOUTH AMERICA	14	13	13	11	10	10	10	9	9	8	10	12	13	15	16	16	16	16	16	16	16	17	17	16
WESTERN EUROPE	12	11	10	10	10	9	9	9	8	9	11	13	14	16	17	17	17	16	16	16	16	15	16	15
EASTERN EUROPE	11	11	11	12	10	9	0	0	0	0	12	13	14	16	16	16	16	16	17	17	16	14	12	11
MEDITERRANEAN	13	13	12	12	11	10	10	0	0	0	12	13	14	15	16	16	16	16	16	16	16	15	13	13
MIDDLE EAST (P)	14	13	14	13	0	0	0	0	0	0	14	15	15	16	17	17	18	18	18	17	16	15	14	14
CENTRAL AFRICA	13	12	11	9	8	8	11	11	0	0	13	15	16	17	18	18	19	19	19	19	16	14	13	13
SOUTH AFRICA	10	10	9	8	7	7	11	11	0	0	0	14	16	18	19	19	20	18	14	0	0	0	0	10
SOUTH EAST ASIA (P)	17	16	16	13	0	0	0	0	0	0	0	13	14	16	17	15	15	15	14	14	14	13	12	14
FAR EAST	16	16	16	16	13	0	0	0	0	10	10	12	13	14	13	13	13	13	13	14	15	16	16	16
AUSTRALIA	18	19	18	17	14	12	11	11	11	11	10	11	12	12	12	13	0	0	0	0	0	18	17	17

February 1947 in Ottawa, Ontario.

The observatory was eventually moved to Penticton, British Columbia, where every day at 1700 UTC the sun is tuned in and measurements are made to find out how active its transmitter is. The same energy that is heard on 10.7 cm is the same energy that can be visually observed in the sunspots. However, the visual observations are still continuing, to avoid breaking the long sequence of observations spanning nearly 250 years.

Even at times of zero sunspots the sun is not completely quiet. The lowest measurement of the 10.7 cm flux has been 62.6 units; the highest has been 457.0 units. Since I am positive that someone is going to ask, I will tell you that the unit used to measure the sun's activity is the "solar flux unit" (sfu) and 1 sfu is equivalent to

10,000 jansky....

As we said earlier, the level of activity of the sun and number of flares that ensues from this activity are the major components of instability in the ionosphere. If the activity level is high, we are liable to have shortwave conditions that are unstable and suffer from fading, polar flutter, and similar problems, as the ionospheric layers respond to the sun's activity.

The solar flux level can be used to predict the level of ionization of the "F" layer of the ionosphere, from which we then derive the Maximum Usable Frequency. Once we know this frequency we can derive the value of the Optimum Working Frequency that is tabulated on this page.

Next month we'll conclude our overview and give you some resources for further reading.



## Mediumwave Moxie

**H**earing about the passing of Ken Cornell W2IMB put me in a pensive state of mind. While so many monitoring hobbyists quested for signals in the shortwave range and above in the VHF/UHF regions, Ken showed us for years that a lot of great stuff could be found below 1600 kHz that was worth listening to. He was also a confirmed home-brewer and certified cheap-skate when it came to radio. His skills in these areas helped many of us move forward in our hobby without emptying our wallets.

Ken was best known for his longwave work but he was also no slouch in the medium wave region, all of which brings us to this month's topic.

You say you don't have any money to devote to the radio hobby right now? You peruse the catalogs (because they're free), but the chances of putting a high dollar receiver in your home are as remote as Madonna signing you up as the lead hunk in her next video? No matter, my friend. Radio is all around you! The signals are free, listening to them can be nearly so, and challenging catches can be found on any band.

I confess to being a "DC to daylight" monitor, but even I have my favorite places in the radio spectrum. I have always enjoyed pushing the monitoring envelope on the good old fashioned AM broadcast band. I've DXed the medium wave band with everything from a crystal set to a laboratory quality receiver and have had fun both ways. In this frequency range, listening doesn't depend on the depth of your money pit. Furthermore, AM broadcast band monitoring is a great way for beginners to learn more about radio monitoring as a hobby.

### ■ Equipment

But let's begin at the beginning. First, find an AM receiver. Most houses have at least one radio in them, even if it is in the family car. Look on top of Mom's refrigerator or root through the closets. Every household should have at least one AM radio (preferably battery powered) just for receiving emergency broadcasts in times of storms or other natural disasters. (That's my old Civil Defense training coming out). Inexpensive AM radios can be purchased for as little as \$5. Once you have found that AM receiver you are well on your



*Getting started in the radio hobby doesn't have to cost a bundle.*

way to tons of radio fun.

The AM broadcast band traditionally has covered the 530 through 1610 kHz range. Recently, the FCC has authorized use of 1610 through 1705 kHz, too. We'll talk more about that in a few moments but, chances are, that AM receiver you found in the back of the closet probably only covers up to 1610 kHz if it's more than a few years old. Anyway, once you have determined that the receiver does in fact work, grab a pencil and paper and we'll get started.

### ■ Technique

Set the radio in front of you and start tuning up the dial from 530 kHz up to the top of the band—1610 or 1705 kHz depending on your receiver's age. As you come upon a signal, stop and take some notice of what you are hearing. Is the signal strong or weak? Does it have any static or noise? Do you hear more than one signal competing for the frequency? Don't try to actually log any stations at this point, just use your ears and pay attention to how things sound.

After you've worked your way up the band once or twice you probably have noticed quite a few things. First of all, you have probably figured out that there are stations of radically different power levels on the AM band. There are AM broadcast power authorizations that run from under 100 watts up to 50,000 watts.

Another thing you will have discovered is that it is often possible to find more than one signal on any given frequency. Tune back to one of these multi-stationed frequencies (as-

suming you ignored my suggestion and took notes anyway) and let's try something out. As you attentively listen to the two or more stations competing on the frequency, slowly turn the radio so that it is facing 90 degrees from you and then 180 degrees from you (so you are looking at the receiver's back). In most cases, during the turning process, you will find that one of the station's will rise out of the noise and become dominant.

Further turning might show *another* station on top of the heap. Pretty neat, huh? Now you know that these radio signals have directional characteristics. In addition, the standard type of antenna found in most AM broadcast portables is directional in nature. You can point the receiver for improved reception of a particular signal.

One other thing you may have noticed is that the majority of signals are evenly spaced by 10 kHz. This level of separation allows for a lot of great monitoring without the need to resort to expensive receivers with equally expensive filtering circuits. You'll still find adjacent channel interference if there is a strong station near your home. It's just less of a hassle than it might be in the shortwave regions.

If you're really observant you may have discovered that, from time to time, a weak signal might appear between those nice even 10 kHz spaces. Congratulations, compadre; you've just logged your first new country on the AM band! Some parts of the world use a 9 kHz spacing. Catching something between the domestic signals is not as hard as you think it might be once you get your ears used to listening in the "cracks."

Okay, you might be thinking, once or twice through the band and you've mined all there is to monitor. Nope, not by a long shot. Now we'll talk about some of the other phenomena that make AM broadcast band listening such a challenge even though it can be done on the cheap.

### ■ DXing with Mother Nature

Let's assume that your first trip up and down the band occurred during daylight hours. Now you have to return to the receiver at local sunset to see what happens. Without going into too much detail for the scope of this short article, the FCC requires many stations on



certain frequencies to significantly reduce power at the time of local sunset to reduce the chance of interference with other stations in the region. Likewise they can resume higher power broadcasting again at local sunrise. Now think for a moment. The sun doesn't rise and set at the same time all across the country. So as one station is beginning to operate at a reduced power level, another distant station might still have a stronger signal that is now more easy to catch. Tuning through the band again at local sunset should begin to reveal a very different picture from your daytime trip up the band.

As night falls, the fun really begins. Remember I mentioned that there were some stations that were authorized to operate at 50,000 watts? A portion of these stations are allowed to run this high power 24 hours a day. That's a lot of power, and the propagation conditions that come into play after the sun goes down over both you and the 50 kW super stations will make it possible for you to hear dozens of signals from distant states.

A few relatively easy long distance catches to keep and ear out for are: WSM, Nashville, TN, 650 kHz; WSB Atlanta, GA, 750 kHz; WJR Detroit, MI, 760 kHz; KOA Denver, CO, 850 kHz; WBZ Boston, MA, 1030 kHz; WHO Des Moines, IA, 1040 kHz; KYW Philadelphia, PA, 1060 kHz; WBT Charlotte, NC, 1110 kHz; KSL Salt Lake City, UT, 1160 kHz. There are lots of other "Clear Channel" stations to log, but I picked these out for you to try for because they are among the stations that still use three-letter callsigns that are reminiscent of the earliest days of radio, as opposed to the more common four-letter callsigns.

Your after-sunset listening should be enough to fill quite a few pages of that pad of paper we talked about. But there is yet another bandscan you will want to try. Next time you have a Monday off from school or work, make plans to stay up late on Sunday night. At midnight, as Sunday turns into very early Monday morning, this is the time to go hunting for places where stations have gone off the air for routine and special maintenance. It is also the time when stations might conduct tests of their equipment. These are the "DX Tests" you'll find in a sidebar in the American Bandscan column from September through April.

These tests can turn up a number of rare catches. For instance, being an East Coast dweller, there are several West Coast states that I haven't a shot at unless a couple of mid-country big signal stations shut down for repairs once in awhile. Patience and persistence—rinsed down with a couple of cups of

strong coffee—will net some loggings that you will tell your grandchildren about.

### ■ The Ultimate Challenge

We're not finished yet, folks. There's a handful of frequencies that can turn up all sorts of monitoring action in the AM broadcast band. As a matter of fact, it's the place where all the serious AMDXers hang out. It's called "The Graveyard."

The Graveyard is the name given to the six so-called "local" frequencies. The term graveyard comes from the mistaken belief that these frequencies should be dead after local sunset. Local stations are only allowed to run 1000 watts or less of power.

Because they are designed for local service, each of the channels has as many as 120 stations assigned to them. When you tune in to one of these six frequencies—1230, 1240, 1340, 1400, 1450, 1490 kHz—after dark, at first it sounds like an unintelligible mess. But wait, listen in for a bit, and move that radio around from side to side. Every now and again a distinct signal may rise out of the mess and give you a solid ID.

Experienced and patient monitors to the graveyard frequencies have been known to dig out over 20 signals on any one channel. It's challenging and probably different from any other type of monitoring you have ever done, but the satisfaction of success in digging in the graveyard is like nothing else in radio.

Also, remember the new extended AM band runs up to 1700 kHz. As new stations begin to appear up there—such as WDJM Elizabeth, NJ, 1660 kHz—there will be all the more signals to add to your log.

### ■ A Great Start

Medium wave listening is also a terrific way to get a young person interested in the radio hobby. Help them to hear the distant cities and then point them out on a map for effect. You could show them the way to a family activity that will bring rewards throughout their life.

And what's missing from this article? MONEY! We got all the way through a session of radio monitoring fun and, in most cases, not a penny was spent—other than maybe a few batteries. Sure you can buy a more expensive receiver, some accessories, a fancy antenna, join a few clubs, whatever. You can still have a lot of fun playing radio without needing to dip into your wallet if you put your mind to it. Ken Cornell would have been proud of you, my friend.

## LONGWIRE BALUN

- Use coaxial cable from antenna to receiver.
- Low noise reception from 500 KHz to 30 MHz.




Your longwire may be up in the clear but the wire to the radio picks up noise from light dimmers, TV set, fluorescent lights, etc.

Coax shields out this noise but has far lower impedance than the antenna. Palomar's MLB-1 balun transforms the impedance to give a stronger quieter signal. Static charges go to ground, not through the radio.

Model MLB-1 ..... \$49.95  
+ \$6 to ship U.S./Canada.  
Sales tax in Calif.

## PRESELECTOR

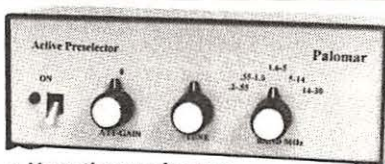

- Hear the weak ones.
- Quieter clearer reception.

Palomar's Active Preselector gives over 20 dB extra gain. Eliminates images and adds selectivity to your receiver. New amplifier circuit reduces spurious outputs. Continuous coverage 200 KHz to 30 MHz.

Model P-508 ..... \$99.95

For 12VDC,  
Model PS-90 AC Adapter .... \$9.95  
+ \$6 to ship U.S./Canada.  
Sales tax in Calif.

## LOOP ANTENNA

- Super medium wave reception.
- Low Noise.
- Reduced interference.



Loop amplifier gives 20 dB gain and sharp tuning. Plug-in loop Model BCB covers 540-1600 KHz AM band. Rotates and tilts to give best possible reception. Other plug-in loops cover 10 KHz to 5 MHz.

Model LA-1 Loop Amplifier . \$99.95

Model BCB Loop ..... \$99.95

Add \$6 to ship U.S./Canada.

Sales tax in Calif.



Send for FREE catalog



## PALOMAR

BOX 462222, ESCONDIDO, CA 92046

ORDERS ONLY 1-800-883-7020

ORDERS/TECH HELP 619-747-3343

FAX: 619-747-3346

e-mail: 75353.2175@compuserv.com



## Beacon Basics

**W**e've covered many topics over the past few months ranging from natural radio to longwave history, but rest assured, I have not forgotten the favorite part of the hobby for many of you...BEACONS! I thought this month would be a good time to review the techniques for hearing and identifying these flagship stations of the longwave band.

### ■ Getting on the band

If your receiver does not tune below the broadcast band (530 kHz), an excellent solution is to use an LF converter. A converter installs between the antenna feedline and receiver's antenna input, requiring no receiver modifications whatsoever. It works by "moving" a slice of the longwave band to a frequency range your receiver can tune, such as 3.5 to 4.0 MHz, or some other convenient range.

A major advantage of going this route is that you retain all of the extra features offered by your shortwave/ham receiver. Luxuries such as a notch filter, noise blanker, digital display, etc. can all be applied to longwave signals in the same manner they are used on shortwave.

Even if you do have a longwave receiver, a converter is often needed if you are interested in tuning below 100 kHz. (All but a few receivers call it quits below this point.) One firm manufacturing converters and many other longwave accessories is LF Engineering, 17 Jeffry Road, Dept. MT, East Haven, CT 06513. You can write for a free catalog.

Antennas are another important consideration for longwave listening. In rural areas, a "long wire" antenna of 100 feet or more may work well if there are few sources of interference nearby. An excellent alternative for city dwellers is an active antenna. While their usefulness for shortwave is still being debated, these small, yet sensitive antennas are proven winners below 500 kHz.

Regardless of the type of antenna you use, it pays to eliminate potential sources of static that you have direct control over. First, try turning off the notorious offenders in your own home—fluorescent lights, computers, TVs, motors, etc. This often reduces static levels considerably and will help ensure a successful listening session.

### ■ Why Beacons?

Why, you ask, would anyone want to listen to navigation beacons? All they do is send the same thing over and over again, right? The attraction to monitoring them comes not from the content of their transmissions (usually a two or three character Morse ID), but rather from the very fact of reception. These unmanned stations run low power (normally less than 50 watts), making them a formidable challenge when compared to the megawatt-class broadcasters found on shortwave.

In many respects, a beacon makes the perfect DXing target. Unlike many types of utility stations, a beacon's location can be precisely determined from charts, its power level and radiation pattern remains constant, and it sends its ID continuously. (This last feature can be a major help when you're trying to sort the "dueling" IDs of several beacons on one frequency.)


Many DXers "collect" beacons. They keep a running total of their loggings and continually strive to hear more distant stations, or otherwise rare catches. The final goal is usually to obtain a QSL card from the Engineer-in-Charge of a beacon—something that is entirely possible with the right background information.

Location, power level, and QSL data for over 7000 beacons can be found in the *Aero/Marine Beacon Guide*. This book has become the standard for identifying beacons in the Americas and Pacific regions of the world. The *Guide* (\$15 postpaid) can be ordered direct from Ken Stryker, 2856-G West Touhy Ave., Dept. MT, Chicago, IL 60645.

### ■ DXing Resource

Ten years ago Sheldon Remington (NI6E) wrote a series of articles entitled "On the Art of NDB DXing" that appeared in the *Lowdown* journal from January 1987 to April 1988. This was a top-notch treatment of the hobby detailing the challenges, techniques, and rewards to be gained from beacon DXing.

Although extremely popular at the time, the passage of a nearly a decade made this

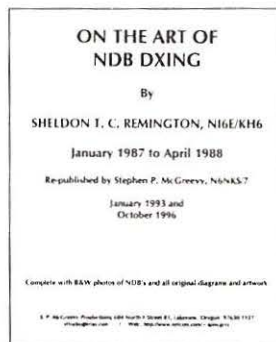

information accessible to only a lucky few who had back issues of the *Lowdown*. All of that has changed today.

Stephen P. McGreevy, N6NKS (of natural radio fame) has re-published the entire series in a single booklet form and has made it available to the longwave community. The table of contents for the book gives an idea of how deep the coverage is:

- Chapter 1—Introduction  
(General information about the hobby, purpose of beacons, objectives of the book)
- Chapter 2—The Spurious Response Problem  
(Covers receiver problems, cures for overload, and filters)
- Chapters 3 through 6—Man Made Noise  
(Explains powerline interference, the politics of RF pollution, use of tuned & untuned loops, directional antennas and other systems)
- Chapters 7 through 9—The Frequency Domain  
(Covers noise blankers, natural noise, receiver noise, preamps, modulation and pitch, beacon frequency assignments, calibrated receivers, and beacon defects)
- Chapter 10—Beacons on the road  
(Discusses portable receivers, mobile setups, and direction finding)

A text version of the book can be found on Stephen McGreevy's web site at <http://pw1.netcom.com/~spmegrvy/artoftoc.html>. To save server space, however, the Internet version omits all photographs and circuit drawings that are printed in the paper-based version. (There are over 30 graphics in the book).

While I enjoyed browsing through the Internet version, I found it almost essential to have all of the information printed out for handy access, including all graphics. The cost for the printed book is \$20 postpaid (Check or M.O.) from: S.P. McGreevy Productions, 604 North F Street #1, Dept. MT, Lakeview, OR 97630-1127. When ordering, specify desired binding style—3-hole punch, or stapled.

The *Art of NDB DXing* makes an excellent addition to any longwave library.

See you next month!



## 1997 SHORTWAVE FREQUENCY GUIDE

worldwide broadcast and utility radio stations!

484 pages • \$35 or DM 50 (international airmail + \$10)

Finally... a really up-to-date handbook with the latest 1997 broadcast schedules compiled and November 1997 available only ten days later! Modern layout allows easy use and quick information access. User-friendly tables include 11,500 entries with all clandestine, domestic, and international broadcast stations worldwide from our 1997 Super Frequency List on CD-ROM (see below). Another 13,800 frequencies cover all utility stations worldwide. A solid introduction to real shortwave monitoring is included as well, plus 1,160 abbreviations. The right product at the right moment for worldwide listeners, radio amateurs and professional monitoring services alike - at a sensational low price!



## 1997 SUPER FREQUENCY LIST ON CD-ROM

now includes all broadcast stations worldwide!

\$42 or DM 60 (international airmail + \$3)




11,500 entries with latest schedules of all clandestine, domestic and international broadcasters on shortwave, compiled by top expert Michel Schaay from the Netherlands - now available as a standard .djb file for open access! 13,800 special frequencies from our international bestseller 1997 Utility Radio Guide (see below). 1160 abbreviations. 14,100 formerly active frequencies. All on one CD-ROM for PCs with Windows\* or Windows95\*. You can search for specific frequencies, countries, stations, languages, call signs, and times, and browse through all that data within milliseconds. It can't get faster than this!

## 1997 GUIDE TO UTILITY RADIO STATIONS

includes latest Red Cross and UNO frequencies!

588 pages • \$56 or DM 80 (international airmail + \$10)

The international reference book for the really fascinating radio services on SW: aero, diplo, maritime, meteo, military, police, press, and telecom. The conflicts on the Balkan and in Africa and Asia are perfectly covered. 13,800 up-to-date frequencies from 0 to 30 MHz are listed, including the very latest frequencies used now during the sunspot minimum. We are the world leader in advanced teleprinter systems monitoring and decoding! This unique reference book lists just everything: abbreviations, addresses, call signs, codes, explanations, frequency band plans, meteo and NAVTEX and press schedules, modulation types, all Q and Z codes, and much more. Thus, it is the ideal companion to the publications above for the "special" stations on shortwave!



**Special package price:** CD-ROM + SW Frequency Guide = \$70. More package deals available. Plus: Internet Radio Guide = \$35. Worldwide Weatherfax Services = \$42. Double CD Recording of Modulation Types = \$70 (cassette \$42). Radio Data Code Manual = \$50. Sample pages and colour screenshots can be viewed on our superb Internet WorldWideWeb site (see below). We have published our international radio books for 28 years. Payment can be made by cheque or credit card - we accept American Express, Eurocard, Mastercard and Visa. Dealer discount rates on request. Please ask for our free catalogue with recommendations from all over the world! ©

Klingensfuss Publications • Hagenloher Str. 14 • D-72070 Tuebingen • Germany

Fax +49 7071 600849 • Phone +49 7071 62830 • E-Mail 101550.514@compuserve.com

Internet <http://ourworld.compuserve.com/homepages/Klingensfuss/>

## We don't make SCANNERS or the ICOM IC-R8500 RECEIVER - We make them better -

DELTACOMM I-8500 Communication Manager for the ICOM IC-R8500 communication receiver. With speed as a design goal DELTACOMM's QUICK LOG function will log signal level, frequency, mode, date, time and optional Global Positioning System (GPS) coordinates at speeds in excess of 2400 channels per minute. Here are a few examples of the many advanced features DELTACOMM I-8500 has to offer.

- Load 40 channels of information including ALPHA NUMERICS into one of the R8500's memory banks in 3 seconds.
- Separate volume level, resume scan delay and maximum monitor delay plus 40 character information field for each scan channel.
- Priority channel operation samples at 2.5 second intervals.
- Multi-receiver control will hand off active frequency to next receiver on line. Able to control up to 125 ICOM receivers (optional).
- Traditional scanning is a thing of the past with our CYBERSCAN feature, used to track systems employing frequency hopping.
- Activity log function automatically records and calculates total spectrum usage time.
- Unique search operation stores all frequencies found active and then automatically skips those frequencies during the remaining search cycles. This feature eliminates redundant logging.

Visit our Internet Web Page or Phone/FAX us for program features, new product releases and pricing schedule. DELTACOMM is available for ICOM R9000, R7100, R7000, R71, R72, IC-735 (features vary with type of radio). Also check out our DELTATONE 2.0 repeater programmer.

<http://www.execpc.com/~deltacom>



**Delta Research**



Box 13677 - Wauwatosa, WI 53213 - FAX/Phone (414) 353-4567



**LENTINI COMMUNICATIONS, INC.**

Toll Free

**1-800-666-0908**

## REL MHS 200

Multi-Band Programmable Scanner

- Multi-Band, Programmable Scanner, 13 Band Coverage From 26,000 MHz Thru 960,000 MHz.
- Includes 6 Meters and Aircraft.
- PL/CTCSS and DPL/DCS included!
- 200 Channels, 10 Banks, 10 Priority Channels.
- Birdie Lockout, Channel Lockout.
- Scan Speed Up To 100 Channels Per Second.
- HS200 Comes With A Metal Belt Clip, AC Adapter, Ear Piece, & Carrying Strap. (4 AA Batteries Not Included).
- Many Other Features.

**\$249.95**  
UPS Included



## YAESU FT-50R

Ultra Compact Dual Band Handheld

Receive: 76-200MHz, 300-540MHz

590-999MHz cellular blocked

Transmit: 144-148MHz

430-450MHz

- AM Aircraft Receive
- Digital Coded Squelch
- High Speed Scanning
- CTCSS Encode (Decode w/FTT-12)
- 112 Memory Channels
- Much, Much More!



## GMRS 210+3

- 10 UHF Channels, CTCSS
- 2 Watts Output (5 watts at 12VDC)

**\$179.95** UPS incl.



## MAXON

SM-2000 Series  
Synthesized Scanning Mobiles UHF & VHF Versions Available

- 25 Watts
- 4 Channels
- CTCSS/DCS

• For Business or GMRS Use

• 40 Watt, 16 Channel Model \$369.95

• Handheld Units Available-Call For Info.

Call on  
Maxom FRS  
Radios!

**\$289.95**  
UPS inc.

## UNIDEN BC9000XLT

**\$379.95**  
delivered

**CALL FOR ALL UNIDEN/ BEARCAT**

## UNIDEN BC3000XLT

**\$359.95**  
delivered



**GRUNDIG**  
Shortwave  
Yacht Boy 400

Advanced Compact  
AM/FM/SSB Shortwave

- Top Performance In A Portable Shortwave Receiver
- Yacht Boy 305 ALSO IN STOCK!

CALL FOR PRICING

**CALL FOR DISCOUNT PRICES ON DRAKE AND SONY**

## SANGEAN ATS909

New From Sangean  
AM/FM/SSB Shortwave

- 306 Memories
- 28 SW Pages Preprogrammed
- Full RDS Reception

• Loaded With Features  
CALL FOR PRICING!



## AR8000

**CALL FOR PRICING**

## AOR

**AR5000**

## IC-R10

**CALL FOR SPECIAL PRICING**

## ICOM

**IC-R8500**



Conn Sales Infor. & Tech Help  
**860-666-6227**

**21 Garfield St. Newington, CT 06111**  
C.O.D.'s OK — SAME DAY SHIPPING

**HOURS: M-F 10am - 6pm**  
**SAT 10am-4pm**  
UPS Ground (48 states)



## Mixed Bag

**T**his month we look at a bunch of short, but interesting items on changes and news in the "regular" domestic bands. Watch for a special report on developments in the expanded band in an upcoming edition of *American Bandscan*.

- In February 1996, hundreds of DXers heard temporary station "KTRK." The U.S. Army operated this station as a test of a portable outlet, intended to inform and boost the morale of American soldiers in Bosnia. After a few days of operation, the station was packed up and is now believed to be operating on 1143 kHz in that now relatively peaceful country.

This February, the Army tried again. The 1997 reincarnation of "KTRK" operated on FM only. Unfortunately, there were only a few days warning—(a good reason to get on the Internet!). A frequency wasn't given, but I seem to recall hearing that 90.5 MHz was used. If you live in the vicinity of Fort Meade, Maryland, and heard something strange at the bottom of the FM dial in early February, this was probably what you heard.

- San Diego-area radio listeners—and West Coast DXers—face some confusing changes in their area. Long-time classical music station KFSD-94.1 has switched to a rock music format. Their classical music has moved to the weaker signal of KOWF-92.1. At the same time, the operators of Los Angeles classical station KKGO-105.1 have announced plans to launch an **AM** classical station in the San Diego area. "K-Bach" will take over Mexican station XETIN-540.

I have heard some other confusing reports about this operation. Some suggest that KKGO's AM station in Costa Mesa, California (also on 540 kHz) will simulcast XETIN. Others suggest that KKGO-AM will also be moving to the expanded band, at 1650 kHz. Stations on 1050 and 1260 kHz, also in Southern California, may also be involved. It would be a good idea to watch all four frequencies.

- Legendary Chicago station WJJD-1160 is no more. CBS has purchased the 1160 kHz facility and moved their successful all-sports operation "The Score" from its old home on 820. The 1160 kHz call letters will change to WSCR. 820 has been sold to a group that (I believe) will run motivational talk. The 1160

frequency briefly rebroadcast sister FM station WJMK-104.3's oldies.

Incidentally, I also understand the 820 frequency will resume nighttime broadcasting soon. CBS shut down the night operation several years ago, as it required several towers, and the land under the towers was more valuable than the radio station!

- The February 9 deadline for returning long-silent stations to the air has come and gone. As recently as mid-January, the FCC listed over 100 silent stations that would get the axe on that day. Most, however, succeeded in getting at least a temporary signal on the air. I believe fewer than 40 licenses were actually canceled. Some of the stations known to have beat the deadline include WRPT-650 in New Hampshire; WJLT-1060 in Massachusetts; WBRW-1170 in New Jersey; and WHCT-channel 18 in Connecticut.

- Just when Seattle TV viewers thought they had their dial figured out... it changed again... twice... In the massive affiliation changes triggered by the Fox/New World deal, KSTW-11 won a CBS affiliation. Former CBS affiliate KIRO-7 ended up signing with UPN.

In early February, another deal was announced; Fox would trade its stations in Phoenix and Austin to KIRO's owners in return for the Seattle station. KIRO would switch to Fox, and Fox affiliate KCPQ-13 would (presumably) become a UPN affiliate.

But that didn't happen. Instead, the owners of the UPN network bought KSTW-11. KIRO-7 will go back to CBS, and both Fox and KCPQ-13 will stay put. UPN and WB are reported to be looking at possible station

purchases in other cities, so you should expect more network changes elsewhere. I guess the moral of the story is to make sure your TV and antenna work properly on every channel, because you never know where your favorite program will show up next!

- Also in TV, this time in Canada, CHCH-11 Hamilton has changed its name to "ON-TV." This name change reflects the station's conversion to province-wide status; licenses have been granted for relay stations across Ontario. I believe the relay in Ottawa (also on channel 11) is already on the air.

You may or may not see the CHCH call letters. While U.S. regulations require stations to identify every hour, stations in Canada are only required to give their call letters once a day. DXers in western Canada and the Pacific Northwest also have a new target pending: a permit has been issued for CIYV-TV channel 42 at Vancouver.

- March *American Bandscan* reported the debut of new KTSN-1340 Elko, Nevada. At the time, I commented "...it's going to be very difficult to log this one (unless you happen to live in Elko!)." I now regret writing that.. The first DX report of KTSN has surfaced, and the DXer was in Finland! That said, it should be noted that the local channels are less crowded in Europe than they are here, and many European stations don't broadcast 24 hours. I have heard tapes of U.S. AM stations, made in northern Europe, and the strength and clarity of the reception is simply amazing!

- When WYNY-103.5 New York became dance-music WKTU in early 1996, country music fans had to rely on DX reception for



*Seattle-area TV viewers face yet another round of network changes. Note that none of these stations shows their network on their logo; all three either have changed networks, or were threatened with a network change.*



their favorite music. Now, the country sound has returned to the U.S.'s largest city. The technical arrangements are what make this newsworthy. The other NYC stations use one transmitter atop the Empire State Building or World Trade Center.

• Odyssey Communications is trying something different. Their "Y-107" consists of three transmitters spread around the metropolitan area. One holds the call letters WRGX-FM; it's a former modern rock station in Westchester County. A second is WZVU-FM Long Branch, New Jersey, which used to carry an oldies format. And the third is WWHB on Long Island, which used to rebroadcast WNEW-102.7 NYC. All three stations broadcast on the same frequency, 107.1 MHz.

This is not Odyssey's first three-way rebroadcast operation. Their other station (ironically also called "Y-107", and also on 107.1 MHz) is a modern-rock outlet in the Los Angeles area.

#### ■ AM DXing Alive and Well

A lot has been written lately about the difficult state of the radio hobbies. Several

clubs have folded in the last few years. However, domestic-band DXing seems to remain fairly strong. The National Radio Club (AM) [P.O. Box 5711, Topeka, KS 66605-0711] was one of the few ANARC-member organizations to post an increase in membership in 1996. And I've since read that membership in the WTFDxA (FM/TV) [P.O. Box 17333, Asheville, NC 28816] has also increased slightly. See *Club Circuit* in *MT* or at [www.grove.net/mtclub.html](http://www.grove.net/mtclub.html) for more.

With the rapid changes in radio these days, membership in specialist clubs like these can do wonders for your success as a DXer.

While the winter of 1996/1997 was pretty good for AM DX, it was miserable for FM and TV. But as you read this, the sporadic-E season is about to begin. Don't forget to check your TV for signs of strange signals on channels 2-6. Warm high-pressure areas may also generate DX on the other channels. If you hear or see anything unusual, let your fellow DXers know. Write: American Bandscan, Box 98, Brasstown NC 28902, or via the Internet at [72777.3143@compuserve.com](mailto:72777.3143@compuserve.com).

## AM CALL CHANGES

The following AM stations have changed call signs:

Old Call	New Call	Location
KEZC-1400	KJOK	Yuma, AZ
KNNZ-540	KKGO	Costa Mesa, CA
KKGO-1050	KNOB	Frazier Park, CA
KGER-1390	KLTX	Long Beach, CA
KXPA-1240	KBLV	Pasadena, CA
KMJ-1380	KTZK	Sacramento, CA
KNNZ-1260	KGIL	San Fernando, CA
KNOB-1510	KKHI	San Rafael, CA
WBGB-1580	WNTF	Mt. Dora, FL
WBNW-590	WEZE	Boston, MA
WEZE-1260	WPZE	Boston, MA
WMRE-1600	WAQY	E. Longmeadow, MA
WBIV-1060	WJLT	Natick, MA
WLPZ-1440	WJAE	Westbrook, ME
WJZZ-1250	WKNX	Bay City, MI
WKNX-1210	WJZZ	Frankenmuth, MI
KQDS-1490	KDDS	Duluth, MN
KFSB-1310	KOCR	Joplin, MO
WMAF-1060	WKRE	Monroe, NC
WQIX-820	WWLZ	Horseheads, NY
WFRY-1450	WODZ	Rome, NY
KRVC-730	KLVB	Medford, OR
KEZF-1040	KLVP	Tigard, OR
KCGN-1520	KSFS	Sioux Falls, SD
WHAL-1400	WZNG	Shelbyville, TN
KWTR-1530	KNEZ	Georgetown, TX
KPXE-1050	KCHN	Liberty, TX
KBLV-1540	KXPA	Bellevue, WA
WMAD-1190	WNWC	Sun Prairie, WI

# Break the Trunking Barrier!

## The Exciting New Uniden BC235XLT 'TrunkTracker' Follows Trunking Signals!

*"This single product will produce the most dramatic increase in scanning in decades. Vast public safety systems that have eluded scanners for years can now be monitored at the touch of a button."*

—Bob Grove, Publisher, Monitoring Times

Compact and sleek, Uniden's new, handheld BC235XLT TrunkTracker lets you follow Motorola trunked communications from start to finish! Now you can monitor those elusive 800 MHz public safety communications that have previously escaped scanners by switching channels between transmissions.

And the BC235XLT Trunk Tracker offers other exciting features as well—conventional scanning of the 29-54, 108-174, 406-512, and 806-956 MHz bands (less cellular); 300 channel memory in 10 banks; 10 priority channels, individual channel delay and lockout; and choice of user-programmable search ranges or factory pre-programmed search of police, fire, emergency, marine, aircraft, and weather frequencies. Included at no extra cost are a wall charger and two rechargeable batteries, BNC-base flex whip, frequency guide, belt clip, earphone, and instruction manual. See our site on the world wide web ([www.grove.net](http://www.grove.net)) for specifications and updated information. Order SCN 10.

### Only \$299.95!

Plus \$8 UPS shipping

Place your order now. Your credit card will not be billed until the unit is shipped. Uniden expects to begin shipping these new units in April. Check the Grove website for a review and updates on specifications, price and availability for these exciting new products.



## GROVE

Grove Enterprises, Inc.

7540 Highway 64 West  
Brasstown, N.C. 28902  
(800) 438-8155 US & Can.  
(704) 837-9200

Fax (704) 837-2216

e-mail: [order@grove.net](mailto:order@grove.net)

World Wide Web: [www.grove.net](http://www.grove.net)



## Micro Pirate Conference Scheduled

**P**aul Griffin of the Association of Micro-Power Broadcasters sends word that a Micro-Power Radio Conference has been scheduled for June 20 and 21 in Carson, CA. Several stations expect to be present, notably including **Radio Free Berkeley**, **San Francisco Liberation Radio**, and **Zoom Black Magic Radio**. The event will be at the O.C.A.W. Union Hall, located at 1200 East 220th Street in Carson. Additional information is available via **Paul\_W\_Griffin@bmug.org** internet e-mail. Literally hundreds of low power pirates inhabit the FM broadcasting band throughout the United States, so the conference subject matter is extremely timely.

### ■ New ACE Web Site

ACE President Pat Murphy of Chesapeake, VA has announced that the Association of Clandestine radio Enthusiasts now operates a page on the world wide web. A URL of **<http://www.clandjop.com/~jcruzan/ace/>** takes you to the site, which features several helpful hints on pirate DXing. It also allows members to electronically send material to the club via the internet. John Cruzan of Cruzan Information Systems in Joplin, MO, is the webmeister of both the ACE site and the longstanding Free Radio Network pirate web page, so you can easily access either source of pirate information via the URL listed here.

### ■ Voice of Tibet

Some clandestine stations are really challenging DX targets. A good example of this is the **Voice of Tibet**, usually audible only with great difficulty on 7400 kHz around 1230 UTC. The *Cumbre DX* internet shortwave broadcast newsletter notes that this tough catch was logged in March by well known DXers Hans Johnson and Dave Valko. To snag it, Hans and Dave organized a DXpedition in Mahalo, located on the island of Maui, Hawaii! They heard an open carrier prior to a sign-on interval signal at 1222 UTC. Our west coast readers probably don't have to travel to Hawaii to try for this one. Has anybody been hearing it?

*Cumbre DX* has established itself as one of the best sources of fresh clandestine DX loggings that you'll find anywhere. Also cov-

ering shortwave broadcast DX, it's distributed over the internet each week to DXers who send in loggings. More information on the newsletter is available at their **<http://www.grove.net/~cumbre>** world wide web site. Yes, this is located on the Grove Enterprises server.

### ■ Yoder's New Books

*MT* reader Jan Schrader read the article about **WJDI's** record breaking 15 kilowatt pirate broadcast in the February *Outer Limits*. This astonishing feat prompted Jan to ask a couple of questions. He wonders, "How can these guys keep from getting nailed by the Feds? I must be missing something. Can you refer me to a book that will help answer my many questions about pirate radio?" Jan picked an excellent time to ask the questions.

Andrew Yoder has repeatedly demonstrated that he's probably the most prolific author of pirate books in North American history. We have news of two new ones this month. Along with Earl T. Gray, Andy's new *Pirate Radio Operations* takes an in-depth look at the broadcasting side of pirate stations. This interesting book is a "how-to" description of just about everything needed to become a pirate broadcaster, covering equipment, production techniques, public relations, safety, the FCC, and dozens of additional factors. The authors note that the FCC will be reading this book, so its cat-and-mouse examples of "How to Avoid the FCC" are by no means guaranteed. The illustrated 264 page book lists for \$19.95 from Loompanies Unlimited, PO Box 1197, Port Townsend, Washington 98368.

In addition, Tiare Publications announces that the ninth annual 1997 edition of *The Pirate Radio Directory* is now available. This book is sort of the *World Radio and Television Handbook* of North American pirate radio. As usual it profiles scores of pirates who were active in 1996, provides tips for pirate DXing and QSLing, and lists hundreds of transmissions heard last year by date, time, and frequency. Andy gets help as usual from your *Outer Limits* editor George Zeller. The book sells for \$12.95 plus \$2.00 shipping via Tiare at PO Box 493, Lake Geneva, WI 53147. In addition, many *Monitoring Times* advertisers carry both books.

### ■ Numbers in Pirate Band

Kenny Love of Columbia, SC, and Dick Pearce of Brattleboro, VT, both report that they are consistently hearing numbers stations in the pirate bands. One of the most widely noticed examples is a five digit English language station with a female synthesized voice that blasts in on 6959 kHz at times like 2100 UTC. Both Kenny and Dick note that this one sometimes suffers from jamming that can bleed over onto the main pirate frequency of 6955 kHz. Signal strengths during the winter suggested that this one probably comes from a European transmitter site.

We haven't heard it for over a year, but one of the funniest pirate stations is known as the **Numbers Parody**. It's easy to tell the pirate from the real thing, since all of the numbers on the pirate consist of Mexican foods. If you hear "taco, guacamole, enchilada, taco, burrito," you can rest assured that the transmission is not designed for hungry spies.

### ■ Quello Leaves FCC

In an item of interest to pirate stations, FCC Commissioner James H. Quello has resigned his position, reportedly because of disagreements over deregulation with FCC Chairman Reed Hundt. Commissioner Andrew Barrett also left the FCC in March. Thus, President Clinton will be appointing two new commissioners. Fearless Fred of **Radio Garbanzo** has volunteered to be a nominee, but he reportedly ranks quite low on the White House's list.

### ■ Errata

Mike Layden of Rouseville, PA, writes in to point out an error in the February issue of the *Outer Limits*, where the pirate band was mentioned repeatedly and incorrectly as "39 meters." Applying the formula for converting kHz frequencies to meters, Mike finds that 6955 kHz is precisely 43.104529 meters. Thus, the main North American pirate band is often described as the 43 meter band, just below the 40 meter ham band. Mike has proved that *Monitoring Times* readers have sharp eyes and sound logical minds!

### ■ What We Are Hearing

Your pirate loggings are always welcome



via PO Box 98, Brasstown, NC 28902, or via the e-mail address at the top of the column. All frequencies are in kHz, with times in UTC.

North American pirate stations listed here use the following addresses: PO Box 1, Belfast, NY 14711; PO Box 109, Blue Ridge Summit, PA 17214; PO Box 28413, Providence, RI 02908; PO Box 146, Stoneham, MA 02180; PO Box 11522, Huntsville, Alabama 35814; PO Box 88, Moline, MI 49335; PO Box 5617, Ventura, CA 93005; PO Box 293, Merlin, Ontario N0P 1W0; and PO Box 3103, Napier, New Zealand. For return postage, enclose three 32¢ stamps in the envelope to USA addresses. \$2 US or two International Reply Coupons go to foreign maildrops.

**Altered States Radio-** 6955 at 0130. William Hurt still offers QSL's in his "Dead Rock Stars" collectors' series for his rock music pirate transmissions. Addr: Merlin. (Rich and Talea Jurens, Katy, TX)

**Anonymous Radio-** 6955 at 0115. Announcer John Doe told his listeners that they didn't hear his broadcast, so they should make sure not to report it to *Monitoring Times*. Hmm. Addr: None. (Randy Ruger, North Hollywood, CA; Lee Silvi, Mentor, OH; Barry Williams, Enterprise, AL; Jurens)

**Anteater Radio-** 6955 at 1900. A horn interval signal is followed by rock and comedy programming on this one. As we see here, their ant has a big appetite. Addr: Belfast. (Michael Prindle, New Suffolk, NY; Williams; Silvi; Jurens; direct from the station)



*Anteater Radio's ant devours a truck.*

**Green Acres Radio-** 6955 at 1500. They repeatedly play the theme song from the old Green Acres TV show. The Chores! The Stores! Fresh Air! Times Square! Addr: None. (Williams)

**K-2000-** 6955 at 2030. Since they are unquestionably the most elaborate DX comedy production on the pirate bands, their return has been welcome. Few DXers escape the clever barbs of this station. Addr: Stoneham. (Kenny Love, Columbia, SC; Jerry Coatsworth, Merlin, Ontario; Williams; Silvi)

**KAOS-** 6955 at 0100. During a recent show, Joe Mama dedicated the rock tune, "The First

Cut is the Deepest," to O. J. Simpson. Addr: Belfast. (Kevin Nauta, Grand Rapids, MI)

**KIRK-** 6955 at 1900. Some DXers have been fooled by a collage program from the Voice of the Ozarks, which features ID's of many pirates over clucking chickens. But, if you listen carefully, it's clear that this show is coming from KIRK. Addr: Still none. (Brandon Artman, West Chester, PA; William Hassig, Mt. Prospect, IL; Coatsworth; Jurens; Pearce; Silvi; Raven)

**KOLD-** 6955 at 0100. Aldo Batista's big band music format is currently unique among North American pirates. Addr: Stoneham. (Mike Ryan, Buena Park, CA; Williams)

**Mystery Radio-** 6955 at 0200. The Shadow specializes in electronic instrumental music that creates an unusual effect. He's become an excellent verifier. Addr: Stoneham. (Jurens)

**Radio Azteca-** 6955 at 1445. Bram Stoker has now produced two dozen different programs, all of which are packed with DX comedy. He's on rather frequently, and you'll like this one. Addr: Belfast. (Dick Pearce, Brattleboro, VT; Neil Wolfish, Toronto, Ontario; Love; Coatsworth; Nauta; Silvi)

**Radio DC-** 6950 at 1830. There must be another election coming up, since their Morse code renditions of "Don't Vote Republican" have returned. Addr: None, sometimes QSL's logs in *The ACE*. (Bob Mason, Arlington, VA)

**Radio Free Speech-** 6955 at 1445. Bill O. Rights stunned his many listeners with a "Farewell" broadcast in March, with the usual novelty tunes and political comedy. But, it is possible that if there is sufficient demand from his listeners, he might produce more shows. Bryan's first pirate QSL arrived from them! Addr: Belfast. (Bryan Wade, Louisville, KY; Nauta)

**Radio Tellus-** 6955 at 2145. Their main programming format is still rock music, but lately they have plugged right wing resistance groups such as the Republic of Texas. Addr: Providence. (Love; Jurens)

**Radio Three-** 6955 at 2115. On the real station, Sal Amoniac plays bland pop oldies, criticizes stations for not QSL'ing, and refuses to use an address or verify reports. A fake "Totally Bogus" version parodies the real station, and actually sends out QSL's. Confused? Join the club. Addr: None. (Hassig; Pearce; Silvi)


**Stereo Sound Radio-** 6955 at 2100. Colonel Billy Bob's rock station verifies electronically via the Free Radio Network web site; see the *ACE* web page article above. Addr: None, uses the FRN. (Rich D'Angelo, Wyomissing, PA; Pearce; Coatsworth; Jurens; Silvi; Williams)

**Up Your Radio Shortwave-** 6955 at 1845. Willy B. Serious specializes in political satire with a leftist ideology. His shows are well produced and thus are entertaining. Addr: Blue Ridge Summit. (Prindle)

**Voice of Helium-** 6955 at 1830. Reliable sources indicate that a "fake" version of this station has been broadcasting lately, which is responsible for an invalid new maildrop that we mentioned last month. Addr: Blue Ridge Summit. (Wolfish; Williams; Prindle)

**Voice of Indigestion-** 6955 at 2230. The rock and rap music on this one is hosted by male and female announcers. Addr: None; says will

verify logs in *The ACE*. (Silvi; Coatsworth)  
**WARR-** 6955 at 0300. Captain Nobeard usually features rock mixed with marijuana advocacy. He complained during a recent show about lack of MT logs, although he's frequently noted here. He's announcing an address, but no QSL's have materialized. Hmm. Addr: Belfast. (Shawn Axelrod, Winnipeg, Manitoba; Artman; Hassig; Silvi; Nauta)  
**WBIG-** 6955 at 2045. Kenny describes the format on Big Mike's station as "industrial strength" rock and roll. Addr: Belfast. (Love; Artman; direct from the station)  
**WEED-** 6955 at 0500. It's been a while since we've seen a log of this slick rock music and marijuana advocacy pirate. As Rich and Talea's

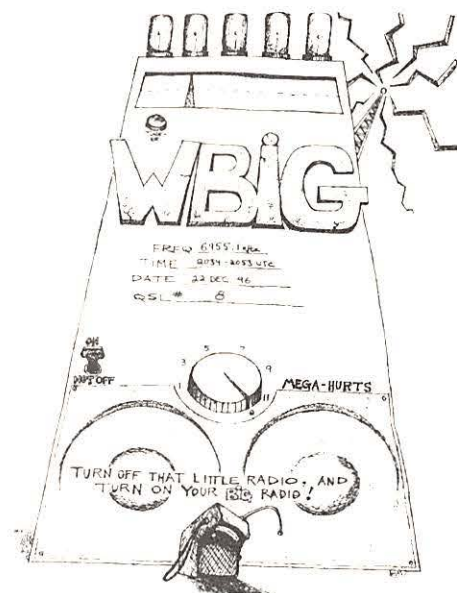

*Big Mike's big radio at WBIG*

log shows, they tend to broadcast later at night than many other stations. Addr: Huntsville. (Jurens)

**WLWLIS-** 6955 at 0000. Using a slogan of "We Love WLIS," they say that they are a tribute to Jack Boggan's veteran interval signal pirate. They create their own interval signals using rock riffs and chords. Addr: Providence. (Ray Carmen, Canton, OH; Wolfish; Nauta; Artman; Pearce)

**WMPR-** 6955 at 2200. Recent programs from them have been dominated by techno dance music. They've gotten out as far as Manitoba! Addr: None. (Axelrod; Nauta; Jurens; Williams)

**WREC-** 6955 at 0230. P. J. Sparx has an easily recognizable format of rock and novelty music, comedy sketches, and frequent cameo ID's by other pirate operators. He still uses the Radio Free East Coast slogan. This was George's first pirate catch; congratulations! Addr: Blue Ridge Summit. (George Knight, Garfield, NJ; Coatsworth, Axelrod; Ryan; Prindle; Silvi; Nauta; Wolfish; Jurens; Williams; Silvi; Love; Pearce)



# New License Structure For Amateurs

**A**mateur radio in the year 2000 is likely to be quite different from what we have today. A World Administrative Radio Conference (WARC) in 1999 will decide what bands and modes we will be allowed and also set new standards for licensing procedures.

With good luck amateurs will be given additional HF spectrum and perhaps gain some new VHF and UHF bands. At past WARC meetings commercial interests were the main obstacle to amateur radio. In recent years, however, HF usage by commercials has diminished as new technologies allowed UHF and microwaves to provide the communication reliability commercial interests demanded. Of course that same technology is now endangering some of the amateur bands at UHF and above.

### ■ The Controversy over Morse Code

At present the major focus is on the Morse requirement for operation below 30 MHz. A recent poll of Amateur Radio Relay League (ARRL) members indicates a majority of members want to retain the Morse requirement but might favor a lowering of code speeds. Of course the individual amateur's standing would still be determined by his ability to copy code.

Under consideration at this time is a basic test requiring no code speed and permitting the same privileges as the present "no code" Technician, plus an intermediate class that would consist of a more thorough technical test (retaining the 5 wpm code test), and allowing operation on some HF bands including Morse, digital and phone modes. Code speed for General and Advanced would be dropped to 10 wpm, and the Extra code test of 20 wpm would be retained.

Do we need Morse code? Morse code is a fun method of communications; I would like to think the mode will always be with us. But in a practical sense, it is simply not necessary. Unfortunately, many amateurs view the Morse requirement as a filter to keep the "undesirable" out of the ham bands. Anyone listening to the HF bands will readily agree that this simply doesn't work. (We have our share of weirdos.)

There are many intelligent people who would love to get on the air and communicate,

experiment, and participate in amateur radio! A large percentage of these folks see Morse as an antiquated mode and don't want to make the effort to learn something they will never use.

Amateur radio's biggest problem is lack of growth. The No Code license did increase numbers somewhat, but not nearly enough. If we allow newcomers access to the HF bands, it could be just what is needed to stimulate growth and the continuation of ham radio.

Commercial and military stations are foregoing Morse communications in favor of newer and faster techniques. As more modern modes take over there is little doubt that Morse will fall entirely by the wayside.

If the majority of amateurs see Morse to be necessary, then let's have a Morse license allowing small segments of the HF bands to be set aside for CW just as we now have, but those not wanting to learn code should still be allowed to operate in the existing phone and digital bands!

### ■ QSLs Expensive?

When I started in ham radio, you could purchase 100 QSL cards from Walter Ashe or World Radio Labs for a dollar and send them to your contacts for two cents. Boy, have things changed! A hundred cards today is going to cost a minimum of eight dollars; and even if you don't send the card in an envelope mailing costs are just too darn high! The return rate for QSL cards is extremely low, (probably due to mail costs) so just getting cards for WAS (worked all states) can cost a sizable chunk of change. Just think what Worked All USA counties is going to cost in postage!

The ARRL has an outgoing QSL service for overseas contacts, but the local cards are still a problem.

There is an answer, however: it is a Domestic QSL Bureau. All you need do is keep



*In the old days QSL cards, like these shown above, could be purchased and mailed to contacts for only three cents!*

some self-addressed, stamped (one unit of postage) envelopes (four is the maximum) on file with this bureau (the envelopes should be 3-5/8 by 6-1/2 inches). Place your call in the upper left hand corner and your name and address at the address position on the envelope. There is no charge for receiving cards via the bureau! Or if you wish, send five dollars and they will provide 10 SASE's for you.

Mailing cards through the bureau costs five cents each. When sending cards sort them by district and suffix of the call. Put the call of the station the card is going to in the address section of the card.

The address for this great service is: USA QSL Bureau, PO Box 814, Brewer, ME 04412-0814.

### ■ Phase 3D

The launch date for AMSAT's Phase 3D satellite has been set back to September. This exciting new bird will provide increased opportunities for all amateurs and we will keep you updated on its progress.

3D will be somewhat different to operate through than the earlier satellites. This column will provide information on how to use the new satellite in the coming months.

That's all for April, see ya next month — 73 de Ike, N3IK



*Re on advertisement below: As of 4/26/94 it became unlawful to market cellular-capable receivers in U.S. Atlantic Ham Radio assures us that it will give a full refund and hold customers harmless from shipping penses if a purchased unit is returned to the vendor by US Customs.*

## 800MHz coverage!

**We have scanners with 800MHz coverage!**

**AOR AR-2700, AR-8000,  
AR-3000A, AR-5000**

**Yupiteru MVT-7100,8000**

**ICOM R9000, R8500, R1, R100**

**Win-Radio** for PC 500Khz-1300Mhz coverage

### AOR AR-8000

500KHz ~ 1900Mhz coverage  
AM/NFM/WFM/USB/LSB/CW Modes  
50 x 20 banks = 1000 memories  
Ferrite Rod Antenna below 2Mhz  
Computer Control interface  
Selectable Step Size  
True SSB (Lower and Upper)



**We do Modifications for your Scout!**  
All Orders Shipped UPS Air

### ATLANTIC HAM RADIO LTD.

(416) 636-3636

368 Wilson Ave

(416) 631-0747 (fax)

Downsview, ON

<http://www.interlog.com/~ahr>

Canada M3H 1S9

Ready for  
Windows 95

# AT LAST!

**High performance, full featured  
scanning under Windows!**

*With Scan\*Star™ for Windows you can scan and search at full speed AND run other programs at the same time, with little or no performance impact!*

- o Scan with up to 10 radios at the same time.
- o Proprietary Scanning Engine™ technology for full performance under Windows - only Scan\*Star has it.
- o Browse and import directly from DBASE files such as Grove or Percon FCC databases.
- o Real time spectrum display on R7100, R9000, AR8000, OS456, OS535, and AR3000(A). Tactical scan display.
- o Use any serial port, even COM3/4 when COM1/2 are in use. Will work with 4 and 8 port cards too!
- o Scan by PL/DPL tone with OS456, OS535 & DC440.
- o Scan multiple groups, banks and search ranges all at the same time! Alarms for priority channels.
- o Automatically unblock AR8000, band plan editor.
- o Logs air time, hits, signal, time/date, PL, DTMF & more.
- o Easy to use data editor. Exchange data with other file formats. Read/write channel memory and much more!

### Equipment Supported:

OS456, OS535, R7100, R7000, R9000, FRG9600, DC440 AR3000(A), AR8000 (EDCO, Opto & AOR I/F supported.).

### System Requirements:

IBM PC 386/486/586 with 4 MEG ram, hard disk, VGA, mouse, serial ports. Windows 3.1 or 95. Cables and interfaces for radios may also be required.

**Scan\*Star for Windows** \$159<sup>97</sup>  
**Commercial Edition [DOS]** \$129<sup>97</sup>  
**Professional Edition [DOS]** \$79<sup>97</sup>

Add S/H & TAX. Visa, MC, AMEX cards accepted. No COD.

To order call: **1-408-926-5630**

Signal Intelligence  
The Leader in PC  
Radio Scanning  
PO BOX 640891  
San Jose CA 95164

**FREE DEMO**  
Download from Scan\*Star BBS  
**1-408-258-6462**  
URL: <http://www.scanstar.com>

# THE BEST SELLING RADIO MAGAZINES FROM OVER THERE...

Every month *Short Wave Magazine* has essential information on scanning, decoding, maritime beacons, propagation, satellites, broadcasting, and much more. In fact it has all the information a short wave listener could possibly want...



... and *Practical Wireless* has features on new products, antennas, packet radio, HF band, vintage radio construction and many other topics as well. It's the monthly magazine no radio amateur should be without.

### AVAILABLE FROM THE FOLLOWING U.S. DEALERS

**GILFER ASSOCIATES INC**  
52 Park Avenue, Park Ridge,  
NJ 07656  
Free Toll: 800 Gilfer - 1

**ELECTRONICS  
EQUIPMENT BANK**  
323 Mill Street, Vienna,  
VA 22180  
Tel: 800 368 3270



**SUBSCRIBE TODAY!**

# ... ARE NOW AVAILABLE OVER HERE

Buy both of Britain's best selling radio magazines in the US from Grove Enterprises, Inc.

PW-\$45, SW-\$45. Together-\$80. Call to order: 1-800-438-8155; FAX 704-837-2216.

Visit our web site at [www.grove.net](http://www.grove.net).





## Build An Active SWL Antenna

**T**his project may be for you if you're a traveling person who likes to take a shortwave receiver with you for monitoring the HF bands during those dull nights in motels. An active antenna replaces hanks of wire or dipoles that would normally be erected out of doors. Some apartment dwellers who contend with restrictions on outdoor antennas are also users of active antennas.

An active antenna is small and takes up very little space in the radio room. This inexpensive weekend project may be what you have been looking for, especially if the foregoing attributes appeal to you.

### ■ What is an Active Antenna?

The electronics term "active" means that the circuit requires an operating voltage of some level. This could be 1 volt, or perhaps 3000 volts. On the other hand, a "passive" circuit requires no operating voltage. Since an

active antenna may contain one or more RF amplifier transistors or ICs, it is an active device.

The operating principle is to use a very short receiving antenna, and then amplify the incoming signal to a level comparable to that coming from a full-size antenna. Active antennas may use only a 3-foot telescoping whip, or they may have up to 30 feet of wire. The longer the antenna, the stronger the received signal.


The antenna may be erected vertically or horizontally. Different results can be obtained when changing the polarity. This will depend largely on the time of day and band conditions. Active antennas may be used indoors or out of doors. They should be kept as far from house wiring as possible in order to minimize noise pickup from the power or phone wiring.

### ■ The Circuit

Figure 1 contains a practical circuit for an active antenna with 25 dB of gain. Q1 is an MPF102 junction field-effect transistor. A 2N4416 or J310 FET may be substituted. You may also use a dual-gate MOSFET, such as a 40673 or 3N211, by tying gates 1 and 2 together and using the device as a single-gate MOSFET.

Q1 has a very high input impedance. The normal gate impedance is 1 megohm or greater. The gate resistor establishes the working impedance of the input circuit. For example, if we used a 1000-ohm resistor from gate to ground, the input effective input Z (impedance) would be 1000 ohms. A high impedance is desirable for the short pickup antenna. This makes the circuit highly sensitive. Q1 provides approximately 10 dB of gain from the BC band to 30 MHz. It is a broadband amplifier because it uses no tuned circuits.

FIGURE 1

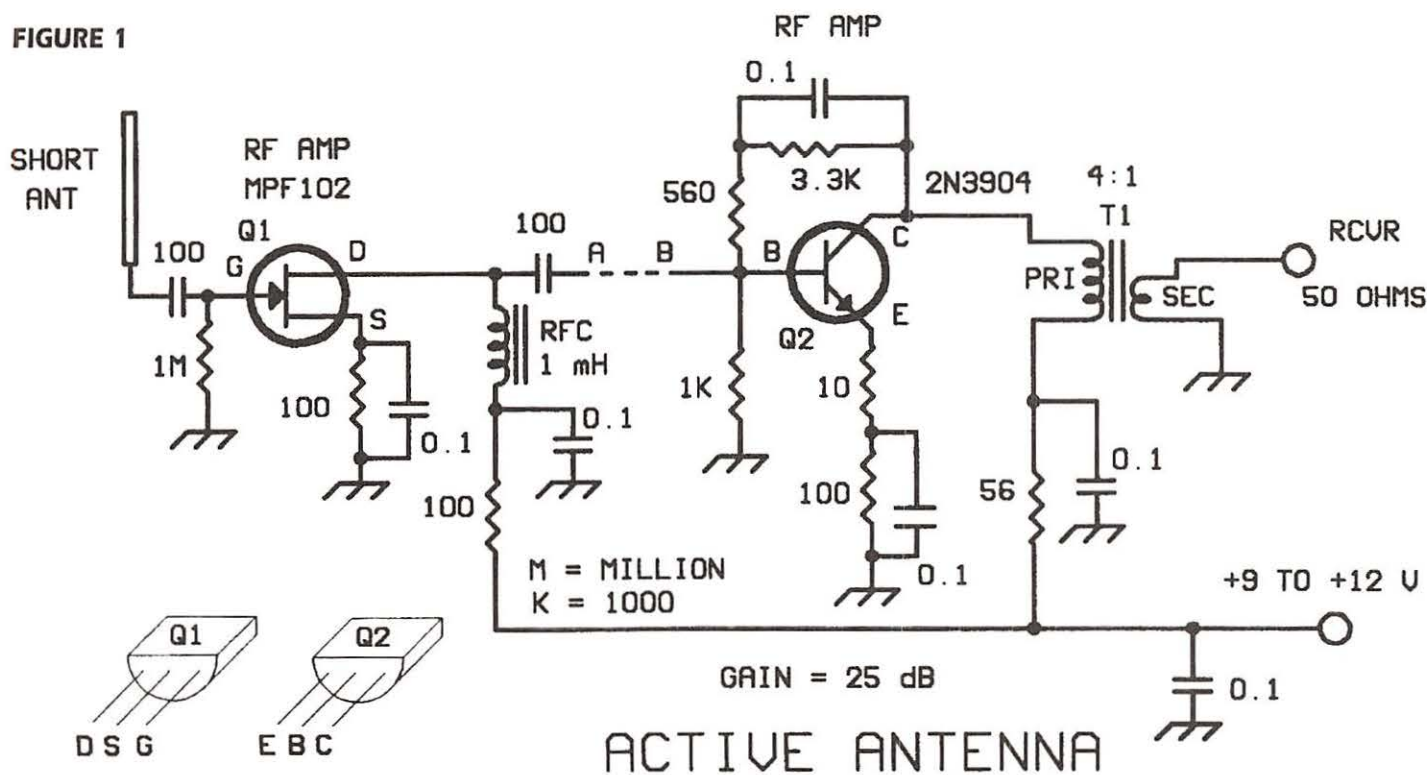

Schematic diagram of the active antenna. Capacitance is in pF. Decimal value capacitors are in  $\mu$ F. Resistors are 1/4-W carbon or carbon film. RFC1 is a miniature 1 mH or 2.5 mH RF choke (Mouser, see note 1). T1 has 16 turns of no. 25 enam. wire on an Amidon FT-50-43 ferrite toroid (850 permeability). The secondary winding has 8 turns of no. 26 wire. See text for explanation of terminals A and B.



Output energy from Q1 is routed to broadband, linear Class A amplifier Q2. This stage adds another 15 dB of signal gain. It has virtually uniform gain from 200 kHz to 40 MHz. A better device for use at Q2 is a 2N5179 CATV transistor, but you may have difficulty locating that transistor. A 2N2222A may also be used at Q2.

Terminals A and B in figure 1 permit inserting the circuit seen in figure 2. (More on this later.) Meanwhile, assume that there is a jumper wire across A and B.

The characteristic input impedance of Q2 is 50 ohms. Therefore, a low-value coupling capacitor is used between Q1 and Q2. This prevents the input of Q2 from loading down the high-impedance output of Q1. The collector impedance of Q2 is 200 ohms. Therefore, we need to use a broadband 4:1 impedance step-down transformer (T1) to match Q2 to the 50-ohm input of our receiver.

### ■ Potential BC-Band Overloading

If you live close to a powerful AM broadcast-band transmitter you may encounter interference to your active antenna. When this occurs you may hear blurps of voice and music throughout the tuning range of your shortwave receiver. Normally, there is only one AM station involved in this form of QRM (interference). The band-reject filter in figure 2 may be inserted between points A and B of figure 1 if you have this type of problem. The same filter may be used independently ahead of any receiver to prevent interference from stations between 550 and 1600 kHz. It has a bilateral impedance of 50 ohms.

The figure 2 filter is not suitable for use between the pickup antenna and Q1, owing to

its 50-ohm impedance. Filters do not function properly unless they are terminated by their characteristic impedance. A series-tuned wave trap could, however, be used between the input of Q1 and circuit ground without disturbing the operation of Q1. The trap would need to be tuned to the frequency of the interfering local AM station. Wave traps are described in *The ARRL Handbook*.<sup>1</sup>

### ■ Construction Tips

Both of the circuits in this article can be assembled on perf board or on a piece of copper-clad PC board. Square isolated pads can be cut into the copper of the PC board with a hacksaw. Point-to-point wiring with short, direct leads is okay. The completed units should be enclosed in shield boxes in order to prevent stray pickup of unwanted signals. I recommend that you attach an earth ground to the metal enclosure. A small cabinet can be made inexpensively from sections of PC board that are soldered together at the seams.

Quality, high-Q capacitors of close tolerance are required for the figure 2 filter. Dipped silver-mica or polystyrene capacitors are best for Q, stability and marked value. These are available by mail.<sup>2</sup> The toroid cores are also available by mail.<sup>3</sup>

### ■ Checkout and Use

Apply any operating voltage from +9 to +12 to the active antenna. The current drain is less than 10 mA. Therefore, a 9-volt transistor radio battery is suitable. Eight or ten AA cells can be wired in series for use as a long-life power supply. A +9 or +12-volt wall transformer is suitable also.

Connect the active antenna output to the input jack of your receiver. Apply operating voltage and touch the short whip or piece of antenna wire with a metal screwdriver blade. You should hear a loud crackle in your receiver if the circuit is working properly. If no sound is heard, check the drain voltage of Q1. It should be slightly lower than the power supply voltage. Also, there should be a small voltage (less than 1 V) between the Q1 source and ground.

Next, check the collector voltage of Q2. It will also be slightly lower than the supply voltage. Check from the Q2 base to ground. You should find approximately 1 volt at that point. Likewise when you check from the Q2 emitter to ground. A lack of Q1 source or Q2 emitter voltage indicates that the transistor is not conducting. If high voltage appears at those points, or at the Q1 gate or Q2 base, there is an open circuit, or the transistor is shorted internally. Make certain that both transistors are installed as shown in figure 1.

### ■ Closing Comments

This can be a fun project that requires very little skill and time. An active antenna can provide many hours of quality monitoring for those who can't have an outdoor antenna. Constructing the figure 1 and 2 circuits will provide a valuable learning experience for those of you who rarely heat a soldering iron.


### ■ NOTES

1 — *ARRL Handbook*, 225 Main St., Newington, CT 06111-1494, (860) 594-0200; or available from Grove (800) 438-8155.

2 — Mouser Electronics, Inc., 2401 Hwy. 287 N., Mansfield, TX 76063-4827. Phone: (800) 346-6873 for catalog or ordering.

3 — Amidon Associates, Inc. (new address), 250 Briggs Ave., Costa Mesa, CA 92626. Phone: (714) 850-4660 for catalog or to order.

**FIGURE 2** BAND REJECT FILTER

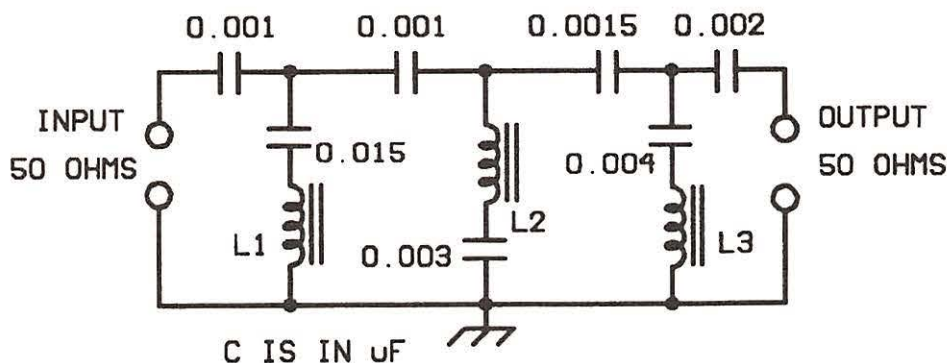

*Schematic diagram of the band-reject filter that notches out signals from 550 to 1600 kHz. Silver-mica or polystyrene capacitors are used. L1 has 26 turns of no. 26 enam. wire on an Amidon T50-2 powdered-iron toroid. L2 uses 32 turns of no. 26 wire on a T50-2 toroid. L3 contains 29 turns of no. 26 wire on a T50-2 toroid.*

**FREE  
SAMPLE  
COPY!**

**ANTIQUE RADIO CLASSIFIED**

*Antique Radio's Largest-Circulation  
Monthly Magazine*

Articles - Classifieds - Ads for Parts & Services  
Also: Early TV, Ham Equip., Books,  
Telegraph, 40's & 50's Radios & more...

**Free 20-word ad each month. Don't miss out!**

1-Year: \$36.95 (\$53.95 by 1st Class)  
6-Month Trial - \$18.95. Foreign - Write.

A.R.C., P.O. Box 802-P11, Carlisle, MA 01741  
Phone: (508) 371-0512; Fax: (508) 371-7129  
Web: [www.antiqueradio.com](http://www.antiqueradio.com)



# Book Reports and More

**W**elcome aboard! Spring is here and if you're out taking advantage of the fine weather by fixing that antenna on the roof, please be careful. Maybe you should stay inside with one of the following books:

### ■ Pandora's Clock

John J. Nance has done it again! *Pandora's Clock* (\$6.99; St. Martin's Paperbacks) is another realistic aviation thriller for the veteran pilot and author. The main theme of the book is about a sick passenger, aboard a 747, who might have been exposed to a deadly virus. In addition to the main theme of the book, John Nance has done his usual fine business in keeping communications and aviation-related other topics as technically correct as possible. This is his best yet. The book is available now at newsstands — don't miss it!

### ■ Air Reports

John Wible of Texas is the owner of a business dealing in aircraft accident reports called *Aireports*. You may have seen his ads in *Airways* and *Airliners*. He is offering a catalog and free sample report to readers of *MT*. I received my catalog and sample, and both were extremely interesting, with excellent attention to detail. The catalog and reports are spiral bound and fit nicely into a bookcase. Prices for the reports vary, as some are more voluminous than others. All in all, this writer thinks it's more than worth your while to pursue this offer — especially if you're interested in why aviation accidents happen.

You can contact John for the catalog and free sample report at *Aireports*, P.O. Box 298, Converse, TX 78109-0298

### ■ ARTCCs

Here is a listing of all ARTCCs (Air Traffic Control Centers) on the US mainland:

<b>Albuquerque</b> 6900 Los Angeles Drive, NE 299 Albuquerque, NM 87113	<b>Memphis</b> 3229 Democrat Road Memphis, TN 38118
<b>Atlanta</b> 299 Woolsey Road Hampton, GA 30228	<b>Jacksonville</b> P.O. Box 98 Hilliard, FL 32046
<b>Boston</b> Northeastern Blvd. Nashua, NH 03060	<b>Minneapolis</b> 512 Division Street Farmington, MN 55024
<b>Chicago</b> 619 Indian Trail Road Aurora, IL 60507	<b>Los Angeles</b> 2555 East Avenue P Palmdale, CA 93550

**Cleveland**  
326 East Lorain Street  
Oberlin, OH 44074  
**Denver**  
1248 Columbus Drive  
Longmont, CO 80501  
**Fort Worth**  
13800 FAA Road  
Euless, TX 76039  
**Houston**  
P.O. Box 60308  
Houston, TX 77205  
**Kansas City**  
1801 East Loula  
Olathe, KS 66062  
**Indianapolis**  
1850 So. Sigsbee Street  
Indianapolis, IN 46241-3640

**Miami**  
7500 NW 58th Street  
Miami, FL 33166  
**New York**  
MacArthur Airport  
Ronkonkoma, LI, NY 11779  
**Oakland**  
5125 Central Avenue  
Fremont, CA 94356  
**Salt Lake City**  
2150 West, 700 North  
Salt Lake City, UT 84116  
**Seattle**  
3101 Auburn Way, South  
Auburn, WA 98002  
**Washington, D.C.**  
Intersection Rt 7 & 654  
Leesburg, VA 22075

As you may have noticed, the name of the center isn't always the same as the city in which it's located. Most of the time, the center is situated in the suburbs or out in the country, away from metropolitan areas. This is done so that, if a major catastrophe should happen in the city, the ATC center would possibly be spared.

If you plan to write to any of the centers, please include return postage and address the letter for all locations to Attn: Air Traffic Manager. Explain that you're a monitor of aviation communications and would be interested in receiving a sector frequency chart, or whatever information you're seeking.

### ■ More About TCAS

Under testing at Boston's Logan airport is new technology that can automatically alert controllers whenever an aircraft's Traffic Alert and Collision Avoidance System (TCAS) informs the pilot to initiate a Resolution Advisory (RA) maneuver, and it will identify the aircraft involved.

Pilots are supposed to inform ATC of an RA by voice; however, they may forget to do so or there may be a delay. This can lead to serious problems, as incidents can quickly escalate to unmanageable proportions.

Resolution Advisory Report capability, which uses the Mode-S transponder, was included in the original TCAS design and Mode-S ground terminal, but it has never been implemented. The new 7.0 TCAS software now enhances the capability of the RA report.

The Mode-S ground antenna illuminates and interrogates an aircraft's transponder, which will report, along with the aircraft's identity and altitude, whether its TCAS has issued an RA. If so, it will cause the controller's display to identify the aircraft involved in the conflict. When the aircraft is next illuminated by the

ground interrogator several seconds later, the Mode S terminal will request information on the type of RA (Climb, Descend, or Limit Vertical Speed.)

The Boston tests, which began last summer and are nearly completed, are intended to evaluate operating protocol and display format as developed by Mitre Corp.

### ■ New Service for Southwest

This June will see something new for Southwest Airlines — a nonstop long-haul service which will be initiated from Nashville to the West Coast. This will mark a true expansion of the carrier's proven, short-haul strategy to include limited, longer flights of more than 700 miles.

Plans call for utilizing Boeing 737-300 and 737-500 aircraft on the California routes. In October, the airline is to receive its first Boeing 737-700. As part of the new nonstop service to California, Southwest plans to begin flying from Nashville to Detroit, Michigan, and to Columbus, Ohio. Service to Detroit is to commence April 6 with three flights daily, and once-daily flights to Columbus will begin on 11 June.

Southwest is converting Nashville's airport into a hub of its own, following American Airlines' withdrawal.

### ■ Frequency Request

Paul Mabrey, California, requested frequency info for Honolulu and Los Angeles. Ask and you shall receive ...

<b>Honolulu</b>			
Approach/Departures	118.300	119.100	124.800
Tower	118.100	132.200	
Atis	127.900		
Clearance	121.400		
Ground	121.900		
Continental Airlines	460.850	464.575	
Hawaiian Airlines	462.000	460.850	
United	460.725	460.875	

<b>Los Angeles</b>			
Approach/Depart.	124.500	124.300	124.900 125.200
Tower	128.500		
Atis	120.950	133.900	
Clearance	133.800	135.600	
Ground	121.400		
American Airlines	121.650	121.750	
Delta	129.200	129.225	
Southwest	130.100	131.425	460.475, 460.825
TWA	460.675	464.612	464.975
United	131.800	151.775	460.675, 464.525
	129.300	129.500	130.225,
			460.725, 460.875



# Great Books!

## Radio Monitoring

The How-To Guide T.J. "Skip" Arey  
NEW for 1997 N2EI

The **complete** hands-on guide to the fascinating world of communications, including mediumwave, shortwave, VHF/UHF scanning, and much more! Find out who's listening, how they do it, what equipment "works."

The #1 book in scanning and monitoring today!  
"...covers it all, from DC to daylight."

World Scanner Report

ISBN 1-56866-101-0 344 pages, \$19.95

**ULTIMATE SCANNER** Bill Cheek  
Scanner modifications - **THREE** 240 pages, large format, \$29.95  
Bill Cheek is the master of scanner modification, as Editor of the *World Scanning Report* and author of *Scanner Modification Manuals*.

**SCANNERS & Secret Frequencies** Henry Eisenon  
320 pages, \$19.95  
"Must reading." *Electronics Now* "Useful, knowledgeable..." *PopComm*  
"A giant undertaking...authoritative" *Monitoring Times* "...can't miss!" *ASG*  
"Absolutely the best..." *Norm Schrein* "A high point!" *RCMA*

**Beyond Scanning!**  
**Underground Database** 100 pages, large  
Everything that's sort of legal. "Fascinating" *ASG* format, \$23.75

**Television GRAY Market** Henry Eisenon  
Cable & satellite chips, descramblers, etc. 160 pages, \$23.75  
"Explores this shadowy fringe area... good info." *PopComm*

[www.indexbooks.com/~ipgbooks](http://www.indexbooks.com/~ipgbooks)  
s/h \$4 1st book, then \$2 ea. CA add tax

**INDEX** Publishing Group, Inc.  
3368 Governor Drive, Suite 273M MO/check via mail, or  
San Diego, CA 92122 MCard, Visa, AmEx  
**800-546-6707**

# NOW HEAR THIS!

FINALLY!

High-Powered Sound from your HT.

HTS-3 AUDIO BOOSTER WITH:  
AUTO SHUT-OFF & TAPE TRIGGER

**NEW**

- 12 DB of Audio Gain
- 3.5 inch Oval Speaker
- Automatic Shut-Off
- Internal NiCad Charger
- External Power 5-15 VDC

## NEW FEATURES

- Tape Trigger® (automatic logging)
- Auto Polarity Switch
- Input Level Adjustment
- Even Lower Battery Drain
- Heavy Magnet
- Cigar Plug and Power Cord

**\$29.95**  
+ shipping  
& handling

Model HTS-3

**Naval electronics inc.**

6717 Benjamin Road, Tampa, Florida 33634  
Phone: (813) 885-6091 Telex: 289-237 (NAVL UR)  
Fax: (813) 885-3789 Internet: navale@aol.com



# Austin Antenna

"The World Leader in Multiband Technology"



Manufacturers of multi-band Land Mobile, Microwave, and Scanner Antennas for Government Agency operations, Drug and Law Enforcement operations, Communications at the Kennedy Space Center and major networks such as NBC and ESPN.



The Ultimate  
Omnidirectional  
Multiband Station Antenna



New Innovation brings  
New Dimensions for Portables!



**Spectra**

Superb Performance!  
with Maximum Versatility for  
Mobile and Base Station



Send \$1.00 for an Austin Scanner Antenna User's Guide [a regular \$3.95 value]

Austin Antenna 10 Main Street, Gonic, N.H. 03839 (603) 335-6339



# Monitoring the Pulse of the Planet

I went a few weeks ago to see *Dante's Peak*—a recently released action picture regarding a volcanic eruption. The movie, starring Charles Broslyn, does an excellent job of showing off the capabilities and equipment and the brave men and women of the U.S. Geological Survey (USGS).

*Dante's Peak* takes place at the base of what was thought to be a very dormant volcano. It turns out it wasn't dormant, just doing a little light sleeping. A lot of excellent special effects and some stock footage of Mt. Saint Helens provided an excellent thriller as the lead characters try to escape the volcanic eruption.

The little things that we look for to make a movie credible were there. For example, the USGS operates in the 160/170 MHz band for its walkie talkie land mobile communications. The radios that were used in the movie were Motorola MT-500 series designed for that frequency range, not 150-162 MHz. How could one tell? The radios had shorter antennas (rubber duckies) on them than would normally be seen on the 155 MHz version. It's little things like that which make the other technical equipment believable.

The USGS is part of the Department of the Interior, and so will share some of the frequencies with other branches of Interior. For the record, some of the other branches of the Department of the Interior are: Bureau of Indian Affairs, Bureau of Land Management, Bureau of Mines, Bureau of Reclamation, Geological Survey, National Park Service, and U.S. Fish and Wildlife Service.

By definition, the U.S. Geological Survey is empowered to identify the lands of the nation, its water, its energy, and its mineral resources. It classifies federally owned lands for mineral resources and water power potentials; it investigates naturally occurring events such as earthquakes, volcanoes, and landslides; and it also conducts the national civil mapping program.

One of the more interesting departments within the Geologic Survey is the Bureau of Earthquakes, Volcanoes, and Engineering. These are the people that set up the remote monitoring equipment to give us advance warning of the "big one." There is an entire network in California and the surrounding states that provide this service, relying upon

remote sensors that report back to central monitoring locations.

Monitors who provided the following information say that you are listening to either a low warbling tone or a continuous tone. Any deviation from the norm indicates that something is happening. Here is a list of the frequencies used for the seismic telemetry network "Tilt Meters" (all frequencies are in MHz):

162.59375	162.596875	162.803125	162.80625
162.809375	163.390625	163.393755	163.396875
163.603175	163.60625	163.609375	163.79375
163.796875	164.00625	164.009375	164.840625
164.84375	164.846875	165.80625	165.809375
166.41875	166.421875	166.65625	166.659375
167.19375	167.196875	167.80625	167.809375
171.215625	171.21875	171.221875	171.40625
171.409375	173.19375	173.196875	173.6375
173.7625	173.9625		

You will notice that these frequencies do not fit the federal band plan and will not be able to be exactly entered into your scanner, with the exception of the 168.0000 and possibly a couple of others. Do not worry. Scanner selectivity is wide enough so that the closest frequency your scanner picks will be close enough.

In watching the movie, there were several scenes of remote telemetry equipment set up on the top of the volcano using 400 MHz beams, horizontally polarized, sending their information back to a command center. Here are some of the known frequencies used for UHF telemetry:

408.4250	408.4750	408.5750	408.6250
408.7750	411.6250	412.2250	412.2500
412.2500	412.3750	415.0750	415.1500
417.2750	417.3750	417.8500	419.6750
419.8750			

The Department of Commerce Environmental Research Laboratory seismic systems were recently transferred over to the Geological Survey. The Geological survey got the equipment and use of the following frequencies:

163.025	163.125	163.175	163.300
163.325	163.350	164.075	164.250
164.475	164.675	165.4375	164.4875

165.5375	166.075	166.175	166.6125
166.825	169.025	169.050	169.225
169.375	169.575	169.825	170.200
170.375	171.175	171.625	171.975

Some of the other frequencies used by the USGS are:

### National Mapping Division

Channel	Frequency	Use
01	164.6750	Control/Repeater Input
02	169.8250	Repeater Out
03	169.8250	Simplex

The sub-audible tone used by this agency is 2Z (110.9 Hz)

I am sure that our Pacific northwest readers remember Mount St. Helens and its famed eruption in 1980. If you want to keep track of what is going on there right now, plug in the following seismic telemetry frequencies:

163.175	163.3937	163.60625	166.4187
167.809375	173.9625	173.19375	173.7625
173.9625	406.150	406.26875	408.49375
408.96875	409.675	(Hydrographic data)	
409.86875	412.075	416.79375	419.99375



Photo by Austin Post, USGS

Most experts predict that Mount St. Helens will erupt again. According to *Volcanoes of the World* by Tom Simkin and others (1981), Mount St. Helens erupted 23 times prior to 1831, based on charcoal dates. After that (and before the 1980 eruption) it erupted in 1831, 1835, 1842, 1847, 1848, 1849, 1853, 1854, and 1857. So those of you

who live in that part of the world might want to devote a few channels in one of your scanner banks to some Geological Survey Mt. St. Helens frequencies.

If you are looking for voice transmissions check out 168.425 (KOD305), the Geological Survey repeater on Mount St. Helens. The repeater in for this system is 167.075 MHz. And for the really esoteric listener who has slow scan TV (SSTV) equipment, you might want to point your beam antennas toward the mountain and watch for TV activity from one of the following repeater output frequencies: 417.775 and 417.675. SSTV has been reported on these two frequencies in the past.

Keep monitoring those telemetry channels. You will be one of the first to know when



it is time to leave.

## ■ Bureau of Land Management

The Department of the Interior also operates the Bureau of Land Management. Within this bureau are several divisions. The *Division of Fire, Aviation, and Safety* operates on the following frequencies:

Channel	Frequency	Use
01	170.0500	Control/Input
	166.7250	Repeater Output
02	166.7250	Simplex
03	168.2500	Simplex
04	168.4000	Simplex
05	166.6125	Simplex
06	169.7500	Simplex
07	168.5500	Simplex
08	167.9500	Simplex
09	167.1000	Simplex
10	168.4750	Simplex

The *Division of Law Enforcement* operates on the following channels:

Channel	Frequency	Use
01	167.0000	Simplex
02	166.9750	Control/Input
	166.3750	Repeater Output
03	167.0750	Control/Input
	166.4875	Repeater Output
04	166.3750	Simplex
05	166.4875	Simplex
06	166.6750	Simplex
07	166.2625	Simplex

The *National Interagency Incident Management System* operates on these channels:

Channel	Frequency	Use
01	168.2750	Control/Input
	171.7250	Repeater Output
02	168.5250	Control/Input
	169.4000	Repeater Output
03	173.8125	Control/Input
	168.4750	Repeater Output

### Tactical Operations

Channel	Frequency	Use
Tac-1	166.7250	Control/Input
	167.2500	Repeater Output
Tac-2	166.7750	Simplex
Tac-3	168.2500	Simplex
Tac-4	168.4000	Simplex
Tac-5	166.6125	Control/Input
	168.4000	Repeater Output
Tac-6	167.1000	Simplex
Tac-7	169.7500	Control/Input
	167.1000	Repeater Output
Tac-8	169.3500	Simplex

### Logistics Operations--Primary

Log-1	417.3000	Control/Input
	411.7500	Repeater Output
Log-2	417.3500	Control/Input
	411.9250	Repeater Output
Log-3	417.5000	Control/Input
	412.1500	Repeater Output
Log-4	417.8000	Control/Input
	412.2000	Repeater Output

### Logistics Operations--Secondary

Log-1	41.2700	Simplex
-------	---------	---------

Log-2	41.5500	Simplex
Log-3	49.6100	Control/Input
	46.6300	Repeater Output
Log-4	49.7700	Control/Input
	46.8100	Repeater Output
Log-5	49.9100	Control/Input
	46.9900	Repeater Output

The *Office of Aircraft Services* operates as follows:

01	168.5500	Contact/Simplex
02	166.6750	Tac-1
03	169.1500	Tac-2
04	169.2000	Tac-3
04	167.9500	Tac-4
05	172.6000	Common Air Safety

Meteorburst communications between outlying sites and the control stations are on 40.6900 for the site uplink and 41.7700 for the reply back to the remote site.

## ■ More News Around the Southeastern US

• One of our readers sent in a bit of information regarding encryption devices used with the National Park Service. I reported several months ago that the NPS had purchased encryption devices for their mobile radios. This monitor out of Charlotte, North Carolina, reports hearing a "warbling, skipping type of sound" on the main channel of the Blue Ridge Parkway—167.1750 MHz. It is unknown what it is. If this is an encryption device, it will be the first known government agency NOT to use a digital type of encryption. Keep us informed...

Also from Charlotte: the FBI repeater was using the frequencies of 167.3875 out/162.6325 in, known as Alpha 5. The new primary repeater is known as Alpha 7 and is using 167.2875 out/162.6325 input. They are

also using 167.3375 for simplex.

The FBI in Charlotte has a close working relationship with the local police department, which uses a Motorola 800 MHz trunked system. Our above monitor has been listening very carefully and has on several occasions heard one FBI agent talking to another on their system (167 MHz) telling the other agent to "give him a call on the 800 radio." I have a feeling they were not talking about cellular phones. The 800 MHz trunking mystery deepens.

• I received some e-mail from a Tennessee source who wishes to remain anonymous who gives us a little insight on Tennessee Valley Authority operations. He states that TVA police are using a 408 MHz frequency in the Chattanooga area, but are switching over to a 400 MHz federal trunked system. Looks like the federal trunk systems are showing up in other parts of the country other than just the major metropolitan cities.

• Department of State radio traffic has been picking up in the Houston, Texas, area. The main repeater channel of 409.625 has been yielding some interesting protection details. Code names such as "ABBOT CP, ABBOT ADVANCE, ABBOT FOLLOW" have been heard. For clarification—Abbot is generally the name of the lead agent in charge. ABBOT CP is the command post. ABBOT ADVANCE and FOLLOW are the cars in front of and behind the person being protected. You will also hear info on what hotels are being used, routes, etc. Keep monitoring, but keep your distance!

Let's hear from some of the other parts of the U.S.: what can you tell us about federal monitoring in your neck of the woods?


**Motron** 310 Garfield St Suite 4  
PO Box 2748  
Eugene, Oregon 97402

http://www.motron.com

**\$59.00** Plus S/H

**DTMF DECODER**

The TDD-8X features a large 8-digit LED display and decodes all 16 DTMF digits. The 104 character memory is viewed, without loss of data, by scrolling either left or right. Although a computer is not required, the serial ASCII output allows for automatic logging of decoded number groups. ToneLog™, our IBM/Compatible logging software, is included with each TDD-8X purchase.

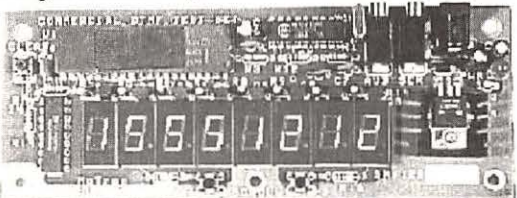

**TDD-8X** Assembled & Tested PCB \$59.00

**PMK-1** Plastic Mounting Kit \$15.00





**CAB-1** Audio & Computer Cables 20.00

**PS-12** 12VDC AC Power Adaptor 10.00

Visa, MasterCard, American Express, Discover and Government Purchase Orders accepted.

COD on Cash or Money Order basis only.

Minimum Government Purchase Order: \$99.  
S/H: \$8 USA; \$11 Canada; \$16 Foreign COD: \$5.  
Premium Shipping available at additional charge

Info: (541) 687-2118 **Orders: (800) 338-9058** Fax: (541) 687-2492



## DISH Weds Murdoch and Other Industry News

**T**he world of electronic technology is spinning faster than an out-of-control satellite. And, just when you get used to the scenery, someone changes all the props. So, this month we learn how to form a satellite All-Star team of sorts, how a flagging DBS contestant tries to salvage some market share, and peek into the future to find out what you'll be listening to in your '99 Town Car.

After an apparently hurried courtship, Rupert Murdoch's News Corporation (parent of the Fox conglomerate, among others) and Charlie Ergen's EchoStar Corporation (parent of DISH satellite TV) have joined forces. The offspring will operate under the trade name Sky, as in News Corp.'s American Sky Broadcasting ("ASkyB").

So, what's everybody getting? That's easy. EchoStar gets cash, and plenty of it. It also gets ASkyB's satellites and other assets which amount to a tidy \$1 billion. And, it turns out that the cash couldn't come at a better time. With competition among the DBS entertainment providers continuing to heat up, something has to be done to try to sustain the \$199 per system price. Joining forces with News Corp. is also the easiest way to get more satellites in order to expand the service to try to scoop the competition.



News Corp., of course, is a huge winner in this deal. They get an up-and-running American DBS service, just like the ones they already have in Europe and Asia, as well as EchoStar's extensive manufacturing capability. You should also know that another partner in this deal is MCI Communications Corporation, which will own 20% of News Corporation's 50% interest in EchoStar which amounts to 10%. You follow? Well, the upshot is that this formidable company will have the use of 91 transponders at five orbital slots, which they hope to turn into 500 channels of video.

What's the point of all those channels? Well, the new Sky service has a plan to deliver

your local TV station up to the satellite so that you can watch on your little dish and not have to have one of those annoying outside TV antennas which seem to have served us so well for the last 50 years. This would be done with spot-beams on the satellite. While it's a great plan, it's not without its flaws.

First, not everyone will get to receive their local station. The plan is to be in markets which represent around 75% of U.S. TV households. This plan means that 22.8 million households will not get their local stations.

Second, it remains to be seen whether there's enough market to afford the costs of providing such a service. C-band "superstations" made plenty of money uplinking their signals because they were marketing to the entire country's cable systems and the 2+ million home dish owners. The Sky plan would make the local TV signals available only in that particular local area.

Third, it is unlikely that Sky will get 100% cooperation with all terrestrial broadcasters in all markets in which they would like to serve. If only one popular station in a given market refuses to play along, local viewers will still need off-air antennas to be able to receive the recalcitrant player. Reasons for reluctance to go along with the gig will include conflict of interest in which local stations already competing with the Fox network affiliates may be owned by other cable interests. Those cable

interests already provide local channels on their cable systems and won't welcome the added competition. In addition, Primestar, a popular DBS player, is owned by a consortium of cable related interests and it's hard to imagine they'll be eager to cooperate with News Corp.

And, finally, there's the regulatory hurdle. It's quite likely that many federal entities will want a hand in painting the details. For instance, regulators such as the FCC, and FTC (Federal Trade Commission), and the Justice Department, among others, will be eager to look into the project. And, of course, Congress will want to step up to the plate on behalf of the many large corporate contributors whose

activities might be affected by Sky's plans. Don't look for these proposed new channels to be on DISH before the turn of the century.

### AlphaStar's Big Hope

Coming in dead last in the DBS race since its launch, AlphaStar has been plagued by a series of marketing fiascos. Not the least of



which was its main sales plan. Originally, the company had a deal with Amway to use their considerable sales army to march AlphaStar to the kind of success enjoyed by Primestar and DSS. The deal fell through and left AlphaStar with no apparent replacement.

Relying on a network of old C-band satellite TV dealers, whose loyalties were already headed in the direction of the DISH network, made it the slowest growing service in the field. C-band was growing faster! After the first seven months AlphaStar had signed up only 40,000 customers. Primestar averages more than that each month. One reason for slow sales is that AlphaStar is a low power DBS service, which means that it uses Ku band to distribute its programming and that requires a larger dish than used at DirecTV and USSB.

However, Primestar is in essentially the same position yet its sales are robust. For the reason, you only have to look at Primestar's marketing ploy of "nothing to buy, about a dollar a day" for service. AlphaStar systems sell for \$499 when purchased, with an added \$300 per year for the basic programming package.

Finally, at the first of March, AlphaStar announced that it had been awarded broadcast and pay-per-view licenses by the Canadian Radio-television Telecommunications Commission (CRTC), Canada's FCC. The company wasted no time in rushing systems to retail stores. That was easy enough to do since AlphaStar is owned by Tee-Comm, long time



manufacturer of C-band IRDs.

The Canadian DBS situation is a clouded one. When DBS hit in the States, the Canadian counterparts were slow off the mark. Indeed, some participants died in the starting blocks which led to a booming business in "gray market" DBS systems. It's a gray market because, technically, Canadians can buy the units but can't legally have them turned on. So, owners go through all kinds of shenanigans to trick U.S. DBS operators into authorizing their units.

For their part, DBS services deauthorize any Canadian subscribers they find. This has led to yet another industry problem: signal theft. While it's not the focus of a lot of press attention, there is considerable activity in the hacked DSS business. But has this coup for AlphaStar come too late? It's estimated that there are already some 80,000 to 100,000 gray market DBS systems up and running north of the border. That's twice AlphaStar's total current viewership.

The good news for AlphaStar is that they will move their operations to Telstar 5 which is slated for launch in early July. This will allow them to go from 18 transponders to 24 and increase their channel line-up from current 75 (35 video, 30 audio, and 10 pay-per-view) to 120 channels. The best kept part of AlphaStar's secret is their distribution of CD audio service DMX. Of course, it requires the additional purchase of a DMX receiver and subscription fees, but it is the best audio service available on satellite today. Watch this column for a full review of the DMX service.

#### ■ Satellite Delivered CD Radio for Your Car

The latest electronic fad on which you will have the opportunity to spend a lot of money is just now in its infancy. The FCC has just recently announced it will auction off two licenses to provide CD quality radio programming. Strangely, since 1992, only four companies have applied for the chance to bid. Now the FCC has decided to limit the auction to those four participants. The interesting part is that none of these companies have any actual equipment or even plans that they're



willing to talk about. Right now it's all just theoretical.

Here's how it might work: There is a very narrow band of frequencies in the 1.6 GHz region which the FCC has set aside in the Mobile Satellite Service for the purpose of transmitting digital CD quality radio programming. One company, CD Radio is said to be planning 30 channels of commercial-free music should they win the auction. Stand-alone receivers or AM-FM-Satellite receivers might be available for your car (one imagines this would be optional, like a CD player).

After installation, a phone call is placed to the programmer and the unit is authorized. As long as you continue to pay your monthly bill (reports say it would be about \$10 per month), you would remain authorized. Of course, reception could be had with fixed receivers as well. CD Radio plans call for two satellites, CD Radio I (80 degrees W) and CD Radio II (110 degrees W).

Programmers would use geostationary satellites with 1.6 GHz capability. One such company which is already offering voice and data services via L-band to North America is American Mobile Satellite Corporation, par-




AMSC-1 Satellite

ent company of American Mobile Radio Corp.—one of the four auction hopefuls. Using their AMSC-1 satellite launched two years ago, AMSC provides a variety of two-way telephone and data services, including nationwide voice dispatch and mobile messaging services, to fixed or mobile customers.

Critics questioned the FCC's method in opening the auction to only four hopefuls, reasoning that more money could be raised by getting a bidding war going among a lot of deep pocketed entrepreneurs. Of more interest is the FCC's decision to open the bidding for LMDS services. Local Multipoint Distribution Services would provide voice, video and data transmissions over high speed local wireless networks which can be connected to the Internet. Reports indicate that the FCC will not allow local cable firms to apply for these licenses except in areas where they have no financial interest.

#### Award Winning Antenna



Winner of the 94 WRTH award for the most innovative design. High performance MW Loop tunes 530 to 1700 kHz with features unlike any other antenna!

#### Kiwa Electronics

612 South 14th Ave., Yakima WA 98902

509-453-KIWA or 1-800-398-1146

kiwa@wolfe.net (Internet/full catalog)

<http://www.wolfe.net/~kiwa>

#### KEEP YOUR C-BAND SYSTEM RUNNING STRONG!

#### Free Buyer's Guide


#### BEST VALUES ON...

- Receivers, including 4DTV
- Dish Movers & LNB's, all kinds
- Tune-up Kits, Tools & Parts
- Skypac<sup>SM</sup> Programming
- Toll Free Technical Help



1050 Frontier Dr.  
Fergus Falls, MN 56537

Fax: 218-739-4879  
Int'l: 218-739-5231



800-334-6455  
[www.skyvision.com](http://www.skyvision.com)

**Skyvision**



## Radio-to-Computer Data Interface

In this day and age of radio-computer interfaces that offer automated, hands-off monitoring, we can easily lose sight of the more exotic signals to be monitored. This article offers a simple decoder interface for non-voice signals that can be processed and displayed by a computer. Such signals include Morse Code, FAX, RTTY, packet, MDT, and probably many others.

The cool thing is that this simple interface circuit can convert most of these signals into the necessary digital bits required by the computer. While you can get sophisticated and spend a lot of money on specialized interfaces for each kind of non-voice signal, this one covers most with mediocre to excellent results, depending on the software and computer that reads and processes the decoded data.

This "analog-to-digital" interface really doesn't have a name and I'm not going to give it one, because it's old hat around computerized monitoring circles. My objective is to simplify its construction and to enhance its operation beyond the bare-bones versions that are widely circulated. Let's just call it the data interface (DI) for the remainder of this article.

### Data Signals

Think about it: radio frequency (RF) is an analog function. This means that "modulation," (the intelligence that's superimposed on a radio frequency), regardless of its type, pretty much has to be analog, too. It is not possible by any conventional means to directly modulate a radio frequency with a digital signal, though Morse Code comes close in the sense that the RF carrier is either on or off. The pattern of on-off conveys intelligence. Other types of signals, including FAX and RTTY, use an analog pattern of tones to modulate the RF.

This data interface converts most analog (and Morse) signals into a digital bitstream for the computer and software. Plain old receiver audio goes into the input and digital data appears at the output. Software and the computer do the rest. Your job is to read the output on your monitor!

### The Computer

Most of the freeware and shareware de-

coder software with which I am familiar requires an AT/286 class or better computer, and frankly, the faster the computer, the better. Our DI is not strictly limited to the IBM/PC world; it will work with Amiga, Macintosh, and perhaps others, depending on available software. I am familiar only with the IBM/PC environment, though, so you're on your own if you use something else.

### The Software

Here it gets sticky: I've used only two decoder programs, JVFAX and HAMCOMM. The latest versions are:

JVFAX71A.EXE 503611 12/07/1995 07:07  
HAMCOM31.EXE 443250 06/10/1996 07:36

Other contenders include:

MSCAN211.ZIP 437636 11/21/1996 19:21  
PKTMON12.ZIP 22030 12/30/1992 00:23

There may be more. You can look around the archives of the Internet and BBS communities for the latest and the greatest. The above four (or more) decoder programs are available on my BBS and FTP sites if you strike out elsewhere. The key thing here is that most decoder software runs fine with the DI!

### The Circuit

This consists of ten common parts and a piece of perfboard, as depicted in Figs 1-3. The schematic is shown in Fig-1 and layout/construction details are shown in Figs 2-3. The circuit uses an op-amp in a comparator arrangement to convert audio sine waves to square waves. Little else needs to be said about it.

### Finished Product

Unless you have different needs, it is suggested you build the DI inside a DB-25 or DB-9 female connector shell (see Fig-4) to facilitate direct connection to a serial (COM) port on your computer. PC serial ports are DB-25

FIG-1: DECODER SCHEMATIC DIAGRAM

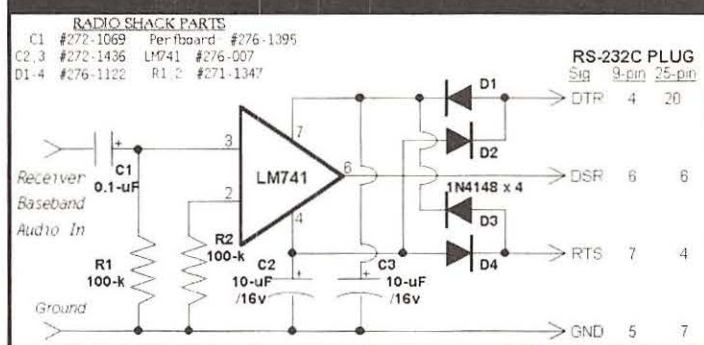


FIG-2: COMPONENT SIDE


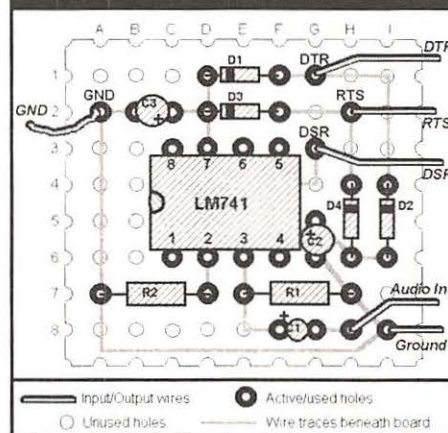


FIG-3: WIRING/SOLDER SIDE



or DB-9 male jacks (typically DB-9). Printer (LPT) ports are female DB-25's, so there is no mistaking the COM ports. If you want to build

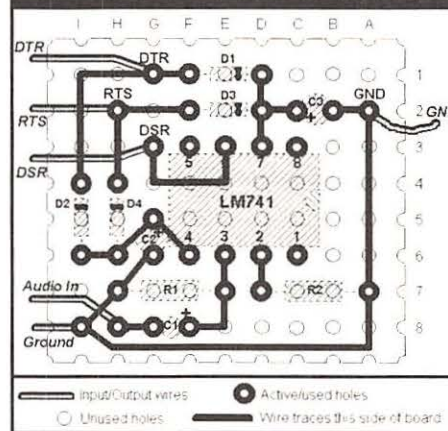


yours into a DB-9 connector shell, you will probably have to do it "dead bug" style without a perfboard.

A DB-9 shell is rather cramped inside, so if there is any doubt, build yours into a female DB-25 shell and use a 25-pin male to 9-pin female port pdapter to mate with the PC's DB-9 COMport. (Radio Shack #26-209) for maximum flexibility, since computer COMports can be one or the other. If you build your DI into a DB-9 shell, and later need to connect to a computer's DB-25 serial port, you'll need a 9-pin male to 25-pin female port adapter (Radio Shack's #26-287) to make the fit.

With the DI circuit built inside the connector shell of choice and wired to appropriate pins as in Fig-1, you'll need a cable of sufficient length to go between the radio and the back of the computer. Length is not critical, but use shielded cable, similar to RG-174/u coax or even shielded microphone cable (RS #278-512) with an appropriate phone plug on the end.

FIG-4: FINISHED PRODUCTS

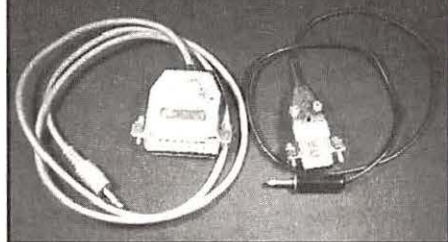

#### Radio Connection

The phone plug (typically 1/8" male, RS# 274-286) should be of the type to plug into a jack on the radio. This can be the headphone jack or perhaps even the external speaker jack; either will do for testing and startup purposes. Later, you will want to experiment with enhanced measures.

#### Enhanced Operation

Choose your decoder software and follow its instructions for decoding the various kinds of non-voice data signals. In general, marginal-to-mediocre operation can be expected from the receiver's headphone or external speaker jacks, largely because the audio at these points has been filtered for the voice band, 300-3000 Hz. Trouble is, non-voice computer data can occupy a significantly wider bandwidth of 5 kHz to 15 kHz or more.

Therefore, after you've wet your feet in data decoding, you will want to experiment with tapping the receiver's internal audio at

other points before any voice-band filtering takes place. The ideal pickoff point for raw, unfiltered "baseband audio" is at the output of the detector for AM signals or the discriminator for NFM signals.

World class radios usually have output jacks specifically for this purpose, so I'll not cover them here. Other radios and scanners are easily modified for baseband audio output by connecting the


(+) lead of a 2.2-μF capacitor to the detector or discriminator output, and the (-) lead to the center lug of a phone jack. The shell or outer lug of this baseband audio jack should be grounded to the receiver's chassis.

There are two primary considerations for the enhancement of the DI's capabilities, the first of which is **bandwidth**. Generally speaking, bandwidth is not a consideration (enhancement not needed) for signals below 30 MHz where there just isn't enough spectrum to afford the luxury of broadband, high-speed data. Therefore, most data signals below 30 MHz are within the receiver's voice band, and it may not be productive to go for the raw unfiltered baseband audio. Headphone or speaker audio may be adequate to decode data in the LF/MF/HF bands.

The VHF/UHF spectrum is eminently suited to broadband signals. Invariably, better performance of the DI will be achieved by taking its input signal from the receiver's discriminator or detector output. Space doesn't allow me to show a Table of the IC's and pin numbers of the baseband audio outputs for all the radios on the market, but I have a large list freely available on my BBS and FTP sites under the filename, IC-PINS.TXT. I also periodically post that list to the Usenet *rec.radio.scanner* newsgroup. I can mail a printed hard copy upon request to those who provide a business-size S.A.S.E. and an additional, loose, first class US postage stamp. (Two IRC's for foreign requests.) Mail requests to me at PO Box 262478, San Diego, CA 92196-2478.

The second consideration for decoding data is **signal-to-noise ratio**. Baseband audio

FIG-5: OPTIONAL PREAMPLIFIER

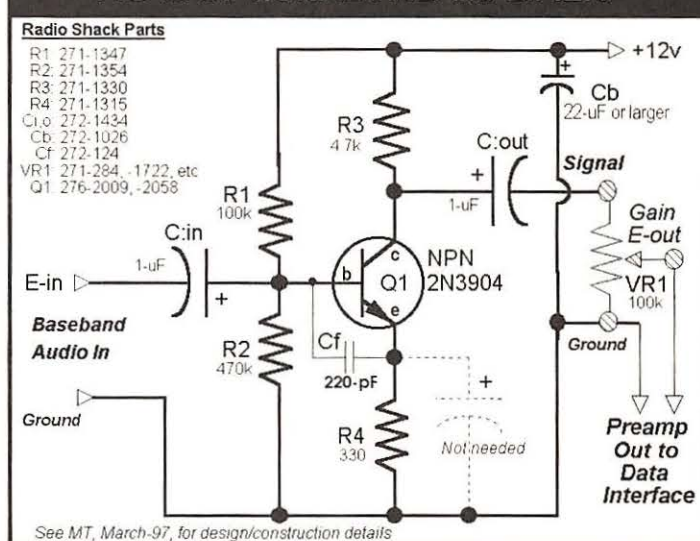

output in most radios is rather weak, so better performance might be obtained with an amplified signal before injecting it into the DI's input. Fig-5 shows an optimized preamp design (based on my March-97 column) for the DI. Too much gain is undesirable, so an adjustment is provided to set the best output level.

The face and nature of radio are undergoing monumental changes with more and more digital data signals and a lot less voice. The DI and a host of readily available decoder software are great, low-cost tools for exploring the exciting new avenues of radio for the near future. Beware of possible legal issues in monitoring data signals, however: you never can tell anymore.....

WWW: <http://ourworld.compuserve.com/homepages/bccheek>  
 FTP: <ftp://ftp.cts.com/pub/bccheek>  
 BBS & FAX: (619) 578-9247 5:30pm-1:30pm, PDT

#### Performance Upgrades

JRC NRD 525/535

AOR AR-7030

Sony ICF-2010

Yaesu FRG-100

Lowe HF-150 and AP/SP-150

RS DX-394

Kiwa offers a variety of performance upgrades for the following receivers which include filter modifications to audio enhancements. Contact Kiwa for details or visit our web site for complete information.

#### Kiwa Electronics

612 South 14th Ave., Yakima WA 98902

509-453-5492 or 1-800-398-1146 (orders)

[kiwa@wolfe.net](mailto:kiwa@wolfe.net) (Internet/full catalog)

<http://www.wolfe.net/~kiwa>



# Computer Updates and Radio Web Sites

It has been a few months since we last visited a few radio related sites on the Web, so this month we'll do some catching up. But first, let's see what's happening to prices in the world of computer hardware. Is it time to increase your memory? Or, how about an upgrade to your Pentium CPU? Let's check on the prices, news, and rumors in the computer market.

## Word on the street

A friend of mine, who is a marketing exec at a major computer catalog company, put it very well: Wall Street and the US economy are looking to the computer market to tell them their temperature! It seems that as the computer market goes, so does the economy. The computer industry has replaced coal, steel, and cars as the nation's industry. So, as the Dow Jones heads to 7000, the PC market continues its growth into every facet of our work and home lives.

However, some components are taking a real hit on their price. Memory prices fell for six months, finally leveling off in February. With semiconductor companies getting out of the DRAM memory business and spare manufacturing capacity being used up by other non-memory products, this may be the time to grab that 16 or 32 Meg of memory. I have seen 72 pin (the type used in most Pentium computers) 16 Meg selling for \$60 plus shipping. And 32 Meg is selling at \$130. The added memory will allow you to run more programs faster and, at the moment, at a great price.

## The (floppy) revolution is coming

Strange things continue to happen to floppy disk and drive prices. Two national computer retailers seem to have weekly offers for 3.5 inch 1.4 Meg floppy disks. Would you believe that I have bought 400 preformatted disks for \$0.0! That is not a misprint. After I received my mail-in refund the total cost to me was the price of postage — thirty-five cents. Check your Sunday newspaper ads for these giveaways.

Why are they literally giving floppies away? Well, if we check the corresponding floppy drive prices we can see a constant reduction into their current mail order level of \$19 to \$27. I believe the industry is getting ready for the new dramatically higher density magnetic media which IBM and others were beginning to

work on about two years ago. The other direction the industry may be moving is towards writable CD-ROMs.

## Zapped by a laser?

The whole industry is waiting and wondering about DVD, Digital Video Disks. While using a similar laser technology to CD-ROMs, DVDs' much higher data densities threaten to totally obsolete CD-ROMs! Therefore CD-ROM manufacturers are taking refuge in writable CD-ROMs.

With 100 times the data capacity they may spell the end for floppies. Although these have been available for the last two years at the \$1000 level, watch for these prices to plummet if a war breaks out between DVD and CD-ROM. What will actually happen short term is

keeping CEO's of CD-ROM and DVD companies from sleeping at night.

## Pentium wins ... but price keeps dropping

For the past few years AMD and other semiconductor companies have tried to compete with the Pentium family of CPUs manufactured by Intel. I think that the contest is over, for the time being, with the Pentium the clear winner in sales and popularity. But, in this crazy business Intel has won the honor of dropping the Pentium family prices a few dollars every month. Last June I looked hard to find a Pentium 100MHz (P100) CPU for \$150. Today I have seen prices as low as \$92 for a P100 and \$110 for a 120 MHz P120.

Combined with a Pentium motherboard

FIGURE 1

## COMPUTERS & RADIO RADIO RELATED INTERNET SITES

Note: Type=(L)inks (P)rograms

PAGE	INTERNET ADDRESS	TYPE
Chris Smolinski	<a href="http://www.access.digex.net/~cps/shortwave.html">www.access.digex.net/~cps/shortwave.html</a>	L
Space Environment	<a href="http://www.sel.bldrdoc.gov/radio/radio.html">www.sel.bldrdoc.gov/radio/radio.html</a>	P
MUF Map	<a href="http://holly.cc.uleth.ca/solar/www/realtime.html">holly.cc.uleth.ca/solar/www/realtime.html</a>	P
WUN	<a href="http://www.cybercomm.net/~slapshot/wunurl.html">www.cybercomm.net/~slapshot/wunurl.html</a>	L
Bob's SWL Bookmarks	<a href="http://www.cybercomm.net/~slapshot/swlmarks.html">www.cybercomm.net/~slapshot/swlmarks.html</a>	L
Bob C's SW & DX	<a href="http://www.cybercomm.net/~slapshot/speedx.html">www.cybercomm.net/~slapshot/speedx.html</a>	LP
HamComm 3.1	<a href="http://www.pervisell.com/ham/hc1.htm">www.pervisell.com/ham/hc1.htm</a>	P
JVFAX + Downloads	<a href="http://www.pervisell.com/ham/index.html">www.pervisell.com/ham/index.html</a>	P
MIT Radio Stations	<a href="http://wmb.r.mit.edu/stations/list.html">wmb.r.mit.edu/stations/list.html</a>	PL
Klingenfuss	<a href="http://ourworld.compuserve.com/homepages/Klingenfuss/">ourworld.compuserve.com/homepages/Klingenfuss/</a>	PL
RealAudio	<a href="http://www.real.com/products/player/index.html">www.real.com/products/player/index.html</a>	P
ShortWWWave	<a href="http://www.ee.mu.oz.au/staff/pbd/SW/index.html">www.ee.mu.oz.au/staff/pbd/SW/index.html</a>	PL
Audio via Net	<a href="http://www.ee.mu.oz.au/staff/pbd/SW/audio.html">www.ee.mu.oz.au/staff/pbd/SW/audio.html</a>	L
AudioNet Stations	<a href="http://www.audionet.com/radio/">www.audionet.com/radio/</a>	LP
PoliceScanner.Com	<a href="http://www.policescanner.com/">www.policescanner.com/</a>	PL



which I picked up on a clearance table at a national retailer for \$65, and I have the makings of a second Pentium for under \$160; not much more than my Sinclair Spectrum cost in 1984. Add some low-priced memory, case, and keyboard, and you're on your way. Check out the "barebones" systems offered by the mail order CPU and memory suppliers.

### ■ Even Gutenberg would be impressed

Prices for all types of printers are at an all time low. Inkjet printer prices continue to fall to \$200 and below; but not their ink cartridges. These keep the cost per inkjet page four or more times higher than laser. What price color!

Laser printer prices have leveled off. Hewlett Packard laser printers with 1 Meg of memory begin at \$350. This is \$150 less expensive than I paid for a basic, non-name brand, 512k memory laser printer two years ago. Dot matrix printers (24 pin) are great buys at around \$110. Surprisingly, I found the best printer prices in places like Sams and BJs. So check new prices before you buy used equipment.

### ■ One more thing

Before we look at some radio related Internet sites, remember that a 386 33 MHz DX2 computer, a 14.4 kbs modem, and a VGA-to-TV converter can bring the internet into your living room inexpensively. Check your local newspaper ads and flea markets for a cheap 386. Make sure it is at least a 33 MHz CPU. Then add a \$35 modem and \$120 VGA-to-TV converter. With an A/B switch on the TV you can go from TV to Internet easily and cheaply. And now, what's new for monitors surfing the net?

### ■ Top ten web sites

It has been a while since we visited radio related web sites. So let's look at about ten of the best radio sites around today, in my humble opinion. Some sites we may have already visited in past columns. But if they have maintained their quality they deserve to be on our top ten list. To make your life a bit easier I'll list the ones we look at in Figure 1 and indicate whether the site is on our list because of program content (P) or its radio related links (L) list.

A very good place to start our surfing is at a radio related links page. This is a page which lists radio related sites for us to explore—**Chris Smolinski's Home Page**. Links to propagation forecasts from the **Space Environment Center** page and hourly generated world maps of the **maximum usable frequency (MUF)** can be a great value to shortwave listeners. There are lots more radio related links to programs and other link pages on Chris's page. Give it a try for yourself.



**FIGURE 2 - Maximum usable freqs on the Web**

Staying with link pages, one that should be bookmarked by *all* utility enthusiasts is **The Worldwide Utility Net, WUN**. Their links page is full of military, aero, LW, VLF and government radio links. This is a must page for UTEs. Everything from ACARS to the Central Intelligence Agency is here.

For the SWLer, **Bob's Shortwave Listeners Bookmarks** is the place to jump on your (surf) board. It's very, very comprehensive. Links to shortwave and domestic broadcast stations and web pages are listed. Pirate radio, free radio, numbers stations and clandestine are represented on Bob's page. Bob has not neglected ham and space. Over 50 links on these topics are here for the taking. UTE are not forgotten. In fact, if you are interested in any facet of broadcasting there is something here for you.

**Bob's Shortwave and DXing Web** page will give you frequency and program information of shortwave broadcast stations which are scheduled to be transmitting at the time you access the page. Links to DX and utility news and tips are daily features of this page.

In our discussion of radio mode digital decoders a few issues ago we mentioned **HamComm**. This program decodes RTTY, Baudot, ASCII, AMTOR, ARQ, SITOR, NAVTEX, CW and more. It requires a very simple hardware decoder which can be built or bought for less than \$30. Well, HamComm has its own page on the Pervisell home page where you can download the latest version for a 30 day trial period. The page has lots of good tips on using the program and is nicely presented.

The **Pervisell** home page allows you to download JV FAX, Navtex station schedules, list of FAX stations, POCSAG decoder software and more. You should visit this site if only for the downloads.

Check out Massachusetts Institute of Technology's (MIT) **Radio List** with over 300 stations from around the world, with information available on the Internet. This information ranges from physical station details and pro-

gramming to Real Audio listening capabilities.

**Klingenfuss**, a name known for many years for his utility frequency books, has a site that will keep you busy for a good part of an evening. His radio station schedules are very complete and up to date. Links to radio equipment manufacturers and publications include all the names you know in the USA and Europe; yep, even *Monitoring Times*.

Using the **RealAudio** program, available for downloading from their home page, you can hear live and pre-recorded audio over the Internet. **ShortWWave's** home page has lots of interesting activities. "Hear Audio Over the Internet" is a page which gives links to shortwave broadcast stations. These are not live, but pre-recorded news broadcasts and can be heard using the Real Audio software. Live audio from US radio stations can be found in **Audionet's Live Radio Guide**.

And finally, for the scanner lovers among us, check out **policescanner.com** for live fire and police audio from Dallas, Texas, and Los Angeles, California. You will also find links on this page to live audio from Dallas air traffic control. This is one of my favorite uses of the Internet. It seems strange to be monitoring VHF from thousand of miles away, as if it were shortwave!

### ■ Hitting reset

Well that's it for another session. I hope you'll find these sites interesting and useful. Don't forget, use my E-mail address list at the top of this column to send me radio related sites you have discovered and enjoyed. If you have a program you would like us to try in the column, send me an E-mail with the details. Till next time, watch your phone bill.

**The NXL-250A: PICKS UP STATIONS LIKE AN OUTDOOR ANTENNA AND SOLVES YOUR NOISE PROBLEMS TOO!**

The NXL-250A uses a special shielded noise-cancelling loop which cuts local noise interference such as power-line buzz, computer and TV hash, etc. Its internal high-gain amplifier and sharp tuning combine with the loop to give you higher signal-pulling sensitivity than any other indoor active antenna! Covers 540 kHz to 30 MHz. With the high-sensitivity 20-in. loop, it's only \$127.95, or with the compact 12-in. loop, it's only \$117.90, ppd! (Specify radio model for proper output adapter.) Avail. options: Automatic internal antenna switch; \$20.00. High sens. MW loop (500-1700 kHz); \$84.95. AC adapter; \$9.95. Order an NXL-250A today! To get our catalog, send a 32 cent stamp.

**WORLDWIDE TECHNOLOGY**  
1118 Raymond Ave., Ft. Pierce, FL 34950  
Call (407) 466-4640



## The Return of the Crystal Set

By Ken Reitz KS4ZR

In 1921 America had never seen the like. It was the first of what was to be the signature of the twentieth century: an electronic entertainment revolution. A radio craze was sweeping the nation and thousands of Americans were tuning in via crystal radio receivers to an increasing array of news and entertainment.

In this era of microchip technology and digital transmissions it's hard to believe that the simplest circuit in radio is still useful today, but it is. As long as there continue to be powerhouse transmitters on the AM band and those transmissions continue in an analog format, there will still be a place for the crystal set. And, what's more, anyone can build one!

If you've been intimidated by modern electronics and thought you could never "homebrew" a piece of gear by yourself, I've got good news: Not only can you do it, but it's cheap and takes less time than watching Ken Burns' *Empires of the Air*.

There's so much information available on building crystal sets and it's so easy, you'll wonder why you hadn't done this before. And, after you've built your crystal set and logged a night's worth of stations, the real fun begins. Experiment! Wind new coils, using different coil forms to tune the SW bands; take out the diode and substitute some genuine galena (yes, it's still available); build a rotatable loop antenna and null out those nearby AM giants to dig out that DX. So, let's get started!

### ■ Building Your First Crystal Set

I built my first set following the instructions in the December 1970 *Mechanix Illustrated* which is available from your local library (pages 74, 75, 120 & 121). If they don't have it on the shelves or on microfiche ask them to get a copy of it for you through Interlibrary Loan.

The first thing you'll need is the Quaker Oats box which is still virtually the same size as it was 75 years ago. You'll need 40-50 feet of No. 22 enameled magnet wire; A 1N34 crystal diode (Radio Shack part #276-1123); 6 Fahnestock clips (Antique Electronic Supply part #SH-11-

4034); 1 365 pf variable capacitor (AES part #CV-235); a 5 x 7 inch piece of pine; and a couple feet of hook-up wire. You'll also need a 2000 ohm headset (note that common Walkman-style headsets are 8 ohms and not usable), an outdoor antenna, and a good ground.

### ■ What To Do

1) Wind thirty turns of the magnet wire around the outside of the oatmeal box. Punching two small holes at the top and bottom of the winding will allow you to slip the ends through the holes and provide tension so the coil doesn't come undone (you'll wind the coil several times before you get the hang of it, be careful not to overlap the winds).

2) Attach the tuning capacitor and the coil-wound box to the pine board. Attach the Fahnestock clips to the board as shown in the diagram.

3) Attach the hook-up wire and the ends of the coil as shown. Remember to bare all wire ends for good connections. The Fahnestock




The first home entertainment center (shown above): an empty Quaker Oats box on Ma's breadboard. (Courtesy Ken Reitz). Below, diagram of your crystal set.

clips make soldering unnecessary and allow for quick experimenting in the future.

4) Slip the diode in place and slip the ends of the headset wire in place as shown.

5) Attach the antenna wire and the ground wire to the clips indicated.

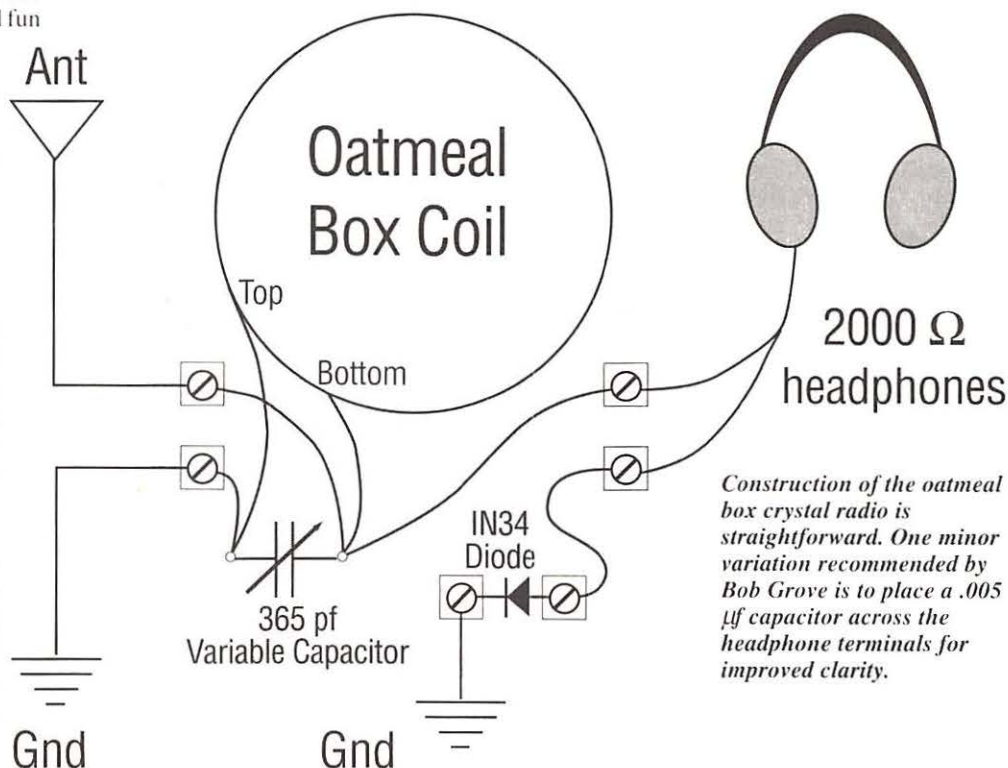

Construction of the oatmeal box crystal radio is straightforward. One minor variation recommended by Bob Grove is to place a .005  $\mu$ f capacitor across the headphone terminals for improved clarity.





Two young ladies tune in KDKA on a Westinghouse Aeriola, Jr. (Courtesy KDKA)

6) That's it! That's all there is to it; now start tuning the band!

### Crystal Tips

Remember that this radio is powered only from the energy of the electromagnetic waves which the antenna picks up. There will only be enough energy to power your headsets. But, with some more experimenting you may find, as others have, ways to power a speaker. Best reception will be had in the country where there will be less interference from nearby AM transmitters. Make sure all dimmer switches in the house are off as they are a tremendous source of interference. Keep a log of stations heard and don't be afraid to modify the layout; you can't hurt this radio.

After you've caught the "crystal" bug you'll want to subscribe to the one publication that takes crystal set building seriously: *The Crystal Set Society Newsletter*. This bi-monthly journal reviews books, lists vendors and has lengthy articles on a variety of related topics. Here you'll learn about building your

own headphones; how to build an FM crystal set; and what other Society members have been building. You'll be amazed.

There are many books written on the subject of crystal sets, but the best by far is K.E. Edwards' *Radios that Work for Free*. This beautifully produced book is one man's homage to the crystal set era. Eschewing power tools, Edwards takes the reader step by step in the process of building instant crystal set heirlooms. His low key style is a warm invitation to the very basics of modern electronics.

He's an encouraging teacher too. "...You can tune in local broadcast stations or short waves from foreign countries. Play them loud enough for a room full of people...The author can separate twenty stations in the San Francisco Bay Area and not just the one or two loud stations..." What are you waiting for?

He's an encouraging teacher too. "...You can tune in local broadcast stations or short waves from foreign countries. Play them loud enough for a room full of people...The author can separate twenty stations in the San Francisco Bay Area and not just the one or two loud stations..." What are you waiting for?

### Sources for crystal radio information and supplies:

Antique Electronic Supply, 6221 S. Maple Avenue, Tempe, AZ 85283 Phone 602-820-5411 FAX 602-820-4643. Has catalog of crystal set related supplies and books.

Antique Wireless Association: Publishes *The Old Timer's Bulletin*—a quarterly journal of early wireless communications, and operates the AWA Museum. AWA dues \$15/year to: Joyce Peckham, Sec.; Box E, Breesport, NY 14816 Phone: 607-739-5443 FAX: 607-796-6230. Operates 75 meter phone

net on 3867 kHz SSB MWF at 9:30 ET features many interesting discussions of early wireless.

Midco, P.O. Box 2288, Hollywood, FL 33022. Has list of crystal related supplies and books.

The Xtal Set Society: Publishes bi-monthly newsletter about crystal set related topics, sells related books and back issues of the *Newsletter*. Subscriptions: \$9.95/year to: P.O. Box 3026 St. Louis, MO 63130 Phone: 314-725-1172 FAX: 314-725-7062.

**The Xtal Set Society Newsletter**  
Volume 5, No. 4 July 1, 1995

IN THIS ISSUE (#25) July 1995

Radio Outfit in a Headset  
A Crystal Set Revisited/Reconstructed  
Future Topics  
Beyond the call  
14th  
Membership correspondence  
Vendors  
References  
The Xtal Set Society

**RADIO OUTFIT IN A HEADSET**  
By Phil Anderson W0XJ

While digging through the Periodical Guide at my local library, I found an article listed by Phillip Judd entitled "Radio Outfit in a Headset". The *Experimenter*, October, 1925. Curious, I found the issue and made a xerox copy. The circuit turned out to be a crystal set, of course, but the neat thing was the way the radio was constructed. See Figures 1 and 2!

I assume that Mr. Judd in Figure 1, wearing his invention! Figure 2 shows the construction in more detail. The eight-inch tuning coil is wound "duo-lateral-wise," a 20 plate, 250 micro-micro-farad tuning capacitor is mounted in one head-plate—with a knob, and a crystal detector is mounted on the outside of the remaining head-plate, which contains a 2,000 ohm receiver. Figure 3 shows the simple wiring for this very unique receiver.

The article opens with a neat quote: "No, dear reader, this picture is not one of a Martian, but shows what the well-dressed radio man will wear in the near future." They seem to be serious about the fact that it works. "Now, my dear reader, pray have patience, for you are about to be introduced to one of the breakers of all freak sets. Meet the Receiving Set in a Headset. Looks kind o' goofy, doesn't it? But—still pick up anything on the air within a radius of ten miles!"

Should you try to build this set—I'm going to attempt it in an effort to get laughs at the office—here are the sparse construction notes from the

Figure 1. Radio in a headset

Figure 2. Construction of headset

(c) Copyright 1995, The Xtal Set Society. All Rights Reserved.

*The Xtal Set Society Newsletter keeps crystal set enthusiasts entertained and motivated with this well written bi-monthly journal.*



*The Old Timer's Bulletin, Official Journal of the Antique Wireless Association (AWA), covers early wireless topics with entertaining technical articles and many great old photographs. Radios that Work for Free by K.E. Edwards is the 1977 masterpiece about the art of building crystal sets.*



**The BECKER 2340**  
The only in-dash car stereo system with AM/FM, shortwave and cassette.

Due to tremendous response and positive marketing results BECKER can now offer this unit for

**\$589.00**  
Free Shipping



With shortwave 19/22/25/31/41/49 M plus a remote control, this top-of-the-line unit offers ease of use for even the most complex functions.

Available exclusively from:

**EAI** ERIE AVIATION INTERNATIONAL, INC.  
1607 ASBURY ROAD  
P.O. BOX 8283 E-mail: shancock@velocity.net  
ERIE, PA 16505 FAX 814.833.3672 **1.800.395.8934**



# Ramsey Electronics SM-100 "Signal Magnet" Antenna

By Mark G. Mulhollon, WB9HBR

**T**hose of us who live in urban areas have a problem—the better the antenna we are able to put up, the more local noise and static is picked up! This situation is especially evident in the AM broadcast band, one of my favorite haunts.

That's why the Ramsey ad featuring the SM-100 caught my eye. It is designed to respond to the magnetic component of a radio wave, instead of the electrostatic field, which is affected most by static and man-made noise.

It also is an active device. The Ramsey SM-100 is a two part system: an amplified antenna section mounted remotely and a power supply/control box for use near the receiver. The only connection needed between the two components is a length of RG-59 (or RG-6) cable.

## ■ Assembly of the Kit

The kit arrived neatly packed and all parts were well protected and appeared to be of excellent quality. Assembling the kit took about three hours from start to finish, working carefully. Component placement on the antenna board is a little cramped—you'll need a fine tip on your soldering iron.




When a polarized component, such as a diode or an electrolytic capacitor, is called for, the manual explains how the component should be installed correctly. Component locations are also screened onto the PC board itself. Ramsey has done a fairly good job on the instructions (mine were marked "Second printing, September 1994"), but there were a few problems.

First, a part was supplied and the circuit board is marked for part C2, a .01 uf capacitor, but its installation was not mentioned. I installed the part where it was outlined on the board. According to the schematic in the manual, C2 is a coupling capacitor between the tuning unit and the radio, and the system wouldn't work without it.

Second, on page 14, at step #38, the incorrect color code is given for R15, a 470 ohm resistor (it should be Yellow-Violet-Brown)—a minor gripe, but still an unnecessary compli-

cation for a first-time kit builder.

Third, R17, a 5K potentiometer is installed as a calibration control, but no mention of its adjustment is given in the manual. Referring to the schematic, this control seems to be used to adjust the overall range of the front panel Tune control.

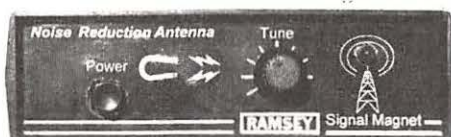


## ■ Tweaking the System

Ramsey provides coil winding data for four ranges, covering approximately 490 to 1670 kHz, 1.2 to 4.1 MHz, 1.9 to 6.5 MHz, and 3.8 to 13 MHz. Since I was going to use my unit for AM broadcast reception and I wanted to be ready for the expanded band, I wound my coil for 66 turns instead of the suggested 70 turns. This turned out to be right on the money.

In two other areas I deviated from the instructions. In the first case I used a short length of RG-174 coaxial cable for added strength instead of short wires to connect the antenna board to the type F jack used for the interconnecting cable.

In the construction of the shielded antenna itself, instructions call for several layers of aluminum foil to be wound over a length of PVC pipe forming the shield over the ferrite bar. I found a quicker and less tricky method using a scrap piece of copper tubing. Interested readers can send me an SASE or e-mail for more details on this.

The antenna portion of the system is in an inverted L-shape, with the shielded ferrite coil in the horizontal section and the antenna circuit board in the vertical leg. The instructions didn't give any specifics about assembling and weatherproofing the unit. I used a good quality

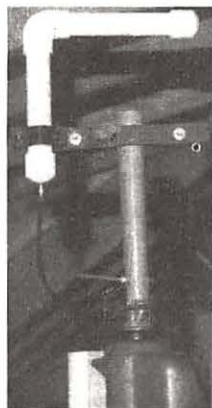

silicon caulk to "glue" everything together and to seal around the opening for the connector. You will need to provide your own material to attach the antenna portion to an antenna mast or pole. I used strapping material from the hardware store.

## ■ Preliminary Test

With everything assembled and visually checked, I connected the control box to the supplied wall-cube power supply. I used a prepared 25 foot length of RG-6 from Radio Shack to go between the antenna and control box, and a short piece of RG-58 to feed the general coverage receiver in my Kenwood TS-450S-AT transceiver.

There are only two controls on the front panel, an on-off pushbutton (in the off position, another antenna connected to a back-panel jack can be routed to your receiver, which can eliminate cable swapping) and a Tune control. A red LED serves as a power-on indicator.

I tuned the radio to a known local station, which came through weakly at first. Rotating the control brought the signal level up significantly to a definite peak. Checking at both ends of the BC band showed that I could peak on the background noise with a little to spare at each end.

## ■ Using the SM-100

BCB DXers who have never used a rotatable loop antenna are in for a real treat. The main advantage is the ability to rotate the antenna remotely (using a TV rotator), giving the capability to "home in" on a desired signal. This is an enormous help in sorting out stations on local and regional frequencies, where four or five signals may be arriving at your location from all directions with essentially equal strengths.

Just as important is the ability to null out undesired stations, allowing you to hear others on the same or nearby frequency that are masked or covered by the stronger station.

I compared several signals at different frequencies and times, switching between a Palomar loop (indoors) at my listening post, the Ramsey loop temporarily mounted on a tripod

(Continued on page 89)



# WHAT'S NEW?

PRODUCTS AND BOOKS OF INTEREST TO THE RADIO HOBBYIST

by Larry Miller

Guest Reviewers: Rachel Baughn, Bob Grove

## Liquid Electrical Tape



Most hobbyists know that using electrical tape on outdoor electrical connections just means you'll have to re-do the connection in a few months; but the alternatives can be messy to apply and hard to store. Now

there's a solution as easy to apply as PVC cement. Star brite Liquid Electrical Tape is tailor-made for those hard-to-reach or irregularly-shaped connections.

A liquid vinyl, the product totally seals out moisture and prevents corrosion, while remaining flexible after it dries. UL testing shows it has dielectric properties better than that of conventional electrical tape.

Star brite Liquid Electrical Tape is available in black, red, green, clear, and white, and comes in a squeeze tube or can. For more information, contact Star brite at 800-327-8583 or Grove Enterprises at 800-438-8155 (\$6.45, black only).

—RB

## New M-450 Universal Decoder

Ever want to decode some of that digital hash you hear on your scanner or HF receiver? With the new M-450 Universal decoder, you can easily decode

not only CTCSS (PL) sub-audible tones, DCS (DPL) squelch tones but POCSAG and GOLAY digital paging messages, DTMF (Touch Tone) telephone numbers, even air-to-ground ACARS digital aircraft messages.

Connect this baby to your shortwave receiver and you can read RTTY, SITOR, FEC-A, SWED-ARQ, and even FAX pictures (when used with a printer). One final note. The new M-450 also has a serial port so you can connect the decoder to your PC. It even comes complete with a free DOS-based computer program. The M-450 comes with input jacks for either audio or discriminator interconnect, AC wall adaptor, full manual, and a pair of 1/8" inch plugs. The M-450 does not do



Morse or packet; a computer is not necessary to operate the decoder. To order, call Grove at 800-438-8155 or send your check or money order to P.O. Box 98, Brasstown, NC 28902. The price is \$399.95 plus \$9.00 UPS.

## Internet Radio Guide

Joerg Klingenfuss, publisher of some highly-rated radio guides — *Guide to Utility Radio Stations*, *Guide to Worldwide WeatherFax Stations*, and *Radio Data Code Manual*, to name a few — has published a book that marries radio with the newest type of communications, the Internet. The result is an updated edition of the *Internet Radio Guide*.

Klingenfuss' guides are good, no doubt. His utility guide has long been a favorite of serious monitors around the world. His new shortwave broadcast frequency guide is likewise getting some good initial reviews. And no doubt his internet radio

(MT Review .... Continued from page 89)

with an old TV rotator eight feet off the ground, and my thirty-five foot longwire at fifteen feet. These were my findings:

**Peaking:** Keeping an eye on the S-meter, I was able to rotate the Ramsey antenna easily with the rotator for maximum received strength.

**Nulls:** The null obtainable with the Ramsey antenna was fairly sharp, though not as deep and narrow as with the Palomar loop. The Palomar was able to make some local stations nearly inaudible, where the Ramsey seemed to give a broader, shallower null which still allowed a bit of signal through. The nulling effect on the Ramsey was still significant and very noticeable, however.

**Signal Strength:** The loops usually provided about equal signal strengths. In general they were 2 or 3 S-units below the longwire for signals that were optimum for the wire antenna.

For signals out of the main receiving lobe of the longwire, the loops gained the advantage quickly.

**Noise:** Man-made and atmospheric noise were definitely reduced by both loop antennas. They also could be orientated to avoid nearby noise sources. It often made the difference between being able to hear a signal and not. Some noise still affected each antenna, however.

**Noise (Internal):** During periods when static and atmospheric noise were low, I noted that the SM-100 actually added considerable noise to the signal compared with the long-wire.

**Tuning:** The frequency response on the Palomar loop is symmetrical and sharp, rejecting signals equally well from above and below the desired frequency. The Ramsey loop peaked well when tuning from the bottom of the band upward, but the peak wasn't as evident when tuning from the top down. I learned to start at


the bottom and work my way up.

### ■ Conclusion

I feel Ramsey has a real winner here. Selling for \$79.95 in kit form, (\$119.95 wired and tested) the Signal Magnet allows both the beginning and experienced CBB DXer to take advantage of the directional and noise-reduction properties that only a shielded loop antenna can provide. It also allows someone without the room for an extensive outdoor wire antenna system to enjoy hunting for new stations on the broadcast band. With other amplifiers costing from twice its price to several hundred dollars more, the Ramsey antenna stands out as an exceptional value.

Mark G. Mulhollon, WB9HBR  
916N Greenfield Avenue, Waukesha, WI 53186;  
email: MMULHOLLON@worldnet.att.net



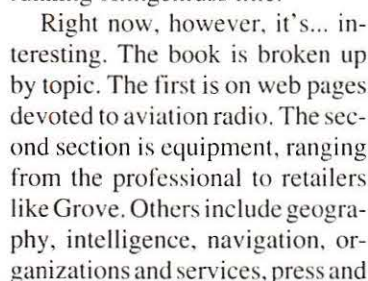

The 488-page 1997 *Internet Radio Guide* can, as the publisher claims, save money on

Past and prospective customers of Advanced Electronic Applications (AEA) products will be interested the next chapter in the closure and sale of the company. The *ARRL Letter* reports that AEA has closed deals to sell its product lines to two other companies in a way that will allow the AEA name

Timewave Technology of St. Paul, Minnesota—already a major name in ham radio gear—is buying the rights to all other AEA products, including its digital line. Timewave president Randy Gawtry, K0CBH, asked hobbyists to give the company a few weeks to set up the new product line before calling, “Watch our Web page,” he

MEASUREMENT SHFT. BAUDRATE

READ IN WHITE 0

PRECISION BAUDRATE MEASUREMENT

100.0 Baud (nominal)

100.0 Baud (measured)

Center Frequency (Hz)

(Averaging on estimated SHFT. 200 Hz estimated CENTER OFFSE 120 Hz)

Simulated Speed Measurement Module



said (<http://www.timewave.com>).

Timewave will have the right to use the AEA name for one year. Gawtry said Timewave also will handle technical support and warranty service for the new product line, which will include AEA's DSP-232 multimode TNC, introduced last year.

Callers to the former AEA number are now being directed to either Tempo or Timewave, as appropriate. Tempo Research is at 619-598-9677. Timewave's number is 612-452-5939.


—RB

## Antennas and Transmission Lines

Not for the mathematically faint of heart, the 320-page *Antennas and Transmission Lines* by John A. Kuecken is actually

an engineering course, featuring derivations of vector algebra as well as integral and differential calculus. Rich in diagrams and formulas, the material may be decades old (many illustrations are pre-World War II), but it is still valid.

Chapter topics include traveling and standing waves, Smith chart analysis, reactance and impedance, radiation resistance,

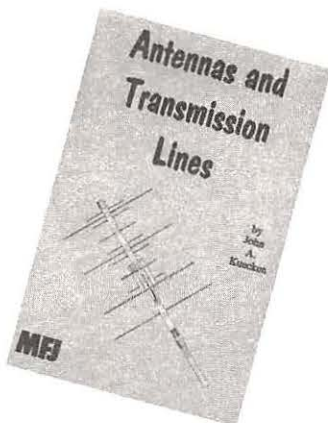

balance, wave interference, couplers and junctions, and antenna design.

*Antennas and Transmission Lines* is \$19.95 plus shipping from MFJ Publishing, 300 Industrial Park Rd., Starkville, MS 39759.

—BG

## Nearly Free Stuff

It's spring, and while you're getting ready to spruce up your antenna system, plunk down \$3.00 and get a copy of *The Wireman's Wirebook III*. It's part catalog and part treasure house of information—full of wire and cable information.

The price of *Wirebook III* is just \$3.00 postpaid. The address to order from is 261 Pittman Rd., Landrum, SC 29356. Mention *MT* when you call.

**Books and equipment for announcement or review should be sent to "What's New?" c/o Monitoring**

**Times,  
P.O. Box 98, 7540  
Hwy 64 West,  
Brasstown, NC  
28902**

**Press releases may be faxed to 704-837-2216 or e-mailed to mteditor@grove.net.**

**DEDICATED TO THE SCANNING AND SHORTWAVE ENTHUSIAST. WE'RE MORE THAN JUST SOFTWARE!**



## INTRODUCING . . . SCANCAT GOLD for Windows

Since 1989, The Recognized Leader in Computer Control

Once you use SCANCAT with YOUR radio, you'll NEVER use your radio again WITHOUT SCANCAT!

SCANCAT supports almost ALL computer controlled radios by: AOR, DRAKE, KENWOOD, ICOM, YAESU and JRC (NRD) Plus PRO-2005/6/35/42 (with OS456/535), Lowe HF-150, and Watkins-Johnson.

### SCANCAT'S BASIC FEATURES

- Search between any 2 frequencies.
- Search by ANY increment.
- Create Disk files.
- Import from most text formats to a working SCANCAT file.
- Unattended Logging of frequencies to files while scanning.
- Scan Disk Files.
- Spectrum Analysis to Screen OR Printer.
- Supports PerCon & Mr. Scanner CD Roms.

### PLUS

- LINK up to 15 Disk files.
- Scan VHF & HF Icom's Simultaneously.
- Print to ANY printer or Disk files.
- MULTIPLE search filters for Diskfile Scanning.
- Search by CTCSS & DCS tones with OS456/535 or DC440 (ICOM only).
- INCLUDES several large shortwave and VHF/UHF databases

### POWERFUL COMMERCIAL FEATURES SUCH AS:

- Demographic search for frequency co-ordination and 2-way Usage Analysis.
- Detailed logging to ASCII type files with DATE, TIME, Sig Str, Air Time.
- UNLIMITED file sizes with our exclusive SCANCAT filing method.
- Exclusive "MACRO" control by frequency of Dwell, Hang, Resume, Sig. Threshold and even 6 separate programmable, audible alarms.
- Command line options for TIMED ON/OFF (Unattended) logging/searches.

**NEW!**  
Windows Version  
Supports AR5000  
and IC-8500

**\*SCANCAT IS NOT COPY PROTECTED—USE ON AS MANY COMPUTERS AS YOU NEED • SCANCAT (DOS) will run on virtually ANY 640K computer, EVEN HP-100XLT PALMTOP!**

### EXCLUSIVE WINDOWS FEATURES

All the features you EXPECT from a true Windows application such as:

- NO MORE CONVERSION! DIRECT scanning of most DBASE, FOXPRO, ACCESS, BTRIEVE files WITHOUT "importing". Our Exclusive "AUTO-PLAN" even sets the mode and increment on the fly!
- UNIQUE database management system with moveable columns. Even SPLIT columns into doubles or triples for easy viewing of ALL important data on one screen.
- VERSATILE "Functional" spectrum analysis. NOT just a "pretty face". Spectrum is held in memory for long term accumulation. Simply "mouse over" to read frequency of spectrum location. "CLICK" to immediately tune your receiver. You can even accumulate a spectrum from scanning DISKFILES of random frequencies!
- Exclusive "SLIDE RULE" tuner. Click or "skate" your mouse over our Slide-Tuner to change frequencies effortlessly! OR use our graphical tuning knob.
- INTERACTIVELY have database, MAPS or Scanning functions on screen simultaneously.
- MAPS - Load virtually ANY map or GRAPHIC image in "BMP" format (several included with Scancat). Program "hot spots" with your favorite frequencies. Up to 1000 frequencies per map. Click on Hotspot to immediately tune your receiver.
- A Complete Modem/Terminal with support for most current modems. Full X-Y-Zmodem download upload support up to 28,800.

SCANCAT GOLD FOR DOS.....\$94.95 + S & H\* SCANCAT GOLD FOR WINDOWS.....\$99.95 + S & H\* UPGRADE from any version.....\$29.95 + S & H\* \*\$5 U.S. \$7.50 FOREIGN

### MAGIC for Windows

**MAGIC takes any ASCII text file from virtually any source, and any format, and creates "frequency files" or ordered lists.**

- Corrects inconsistent column alignment
- "Looks for" single or multiple frequencies embedded in ASCII text.
- Print to file or printer.
- Reads or writes to: SCANCAT, plain text, comma delimited, and dBase.



**MAGIC for Windows**  
**\$34.95**  
(plus \$5.00 S & H)

DEALER INQUIRIES INVITED

INTERNET WEB ADDRESS - <http://www.scancat.com> WEB E-MAIL - [scancat@scancat.com](mailto:scancat@scancat.com)

### "UNI-VERSATILE" INTERFACE

- Supports ICOM, AR8000/2700, YAESU and SCOUT-40.
- Comes with 6 FOOT cable, and adapters to fit all units within a single package (Must Specify Yaesu)
- Unlike "single radio" adapters, can be used with ANY radio supported, simply change the adapter, then "Plug and Play."
- Expandable in future with a simple add on adapter.
- No external power required. Draws power from computer.
- "Reaction Tune" scout with NO modifications to radio.

CAT-232C "UNI-VERSATILE INTERFACE".....\$99.95 + s & h



**NOW IN STOCK**



Order direct or contact  
your favorite dealer  
**FREE DEMO ON  
BBS & WWW**

**COMPUTER AIDED TECHNOLOGIES** P.O. Box 18285 Shreveport, LA 71138

Phone: (318) 687-4444 FAX: (318) 686-0449

Live Tech Support (318) 687-2555 (9 am - 1 pm Central M-F) Nitetime BBS (SCANCAT File Area) (318) 631-3082 (7 pm - 6 am Cent)

**Orders Only**  
**888-SCANCAT**  
**888-722-6228**



## International MT-718 Portable

In the rarified world of radio monitoring, nothing really beats poring over the latest high-tech digital hardware. Perhaps we can afford it, perhaps not, but it never fails to catch our fancy to see what bright engineers can come up with to make our activities more enjoyable and fruitful.

### ■ The "Little Radios That Can"

At the other end of the spectrum are the Rodney Dangerfields of radio, the little low-cost analog portables that come out of Asia, usually China. These modest performers tend to get lost in our rush to dissect exotic gear, but it's these plastic workhorses which keep shortwave listening alive and well in much of the world — in some countries, these multiband el cheapos are as ubiquitous as Levis. Nobody really knows for sure, but of the half billion or so shortwave radios in the world, probably a good three out of four are inexpensive analog portables like these.

But what about here, in prosperous and sassy North America? Of the people who are interested enough in international affairs to listen to shortwave, how many are so strapped for cash that they can't afford a \$100 or \$200 digital portable?

To nobody's surprise, not all that many. In 1991, these Chinese portables sold like ribs at a pig fry during the brief "shortwave spike" resulting from the Gulf War. But that was a flash in the pan, and since then the vast majority of shortwave radios sold in North America have been from such major manufacturers as Sony and Grundig. And most of these are digitally tuned.

### ■ Trips, gifts and fun

Yet, the modest North American market for low-cost analog portables rumbles on. First, there are still some people who won't pay more than \$40 for a radio. Second, established shortwave listeners sometimes want a second "throwaway" radio for trips, the beach and so on.

Third, they make affordable gifts. You'd be surprised how many shortwave enthusiasts have a touch of the missionary in them. The result is that fortunate relatives and friends receive shiny new world band portables for Christmas, Father's Day, birthdays, and other



special occasions. Sometimes these radios wind up as gifts to entire Boy Scout troops, or even as prizes on public TV's "Where in the World Is Carmen Sandiego?"

### ■ Decent coverage except tropics, 41 meters

With this in mind, we recently plumbed bargain basements on a radio-gathering mission, unearthing *inter alia* the new International MT-718 portable. At \$40, it's eminently affordable, and covers longwave, AM and FM. Shortwave coverage excludes the tropical bands, but embraces everything else: 49, 41, 31, 25, 22, 19, 13 and 11 meters.

Most shortwave bands are generous in their coverage of out-of-band segments. However, 41 meters ends just above 7300 kHz, which is well below the "real-world" band edge of 7550 or 7600 kHz. Obviously, whoever did the band layout for 41 meters doesn't listen within North America, where as a practical matter the 41 meter band starts at 7300 kHz!

### ■ Bare-bones radio

The compact '718 lacks so much as a hint

of features, save for a cloth carrying strap. There's an on-off switch, two bandswitches, a volume control and stiff tuning knob — *¡nada más!* The antenna swivels, but doesn't rotate, which makes it impractical to lay the radio down flat. Perhaps for this reason, there's no elevation panel to angle the radio. The analog frequency readout is hardly precise, but is adequate — usually within plus or minus 20 kHz or better.

Audio quality is reasonable, although the speaker is smaller than the generously sized speaker grille would suggest. FM performance is okay, too. But AM stops just above 1600 kHz, another sign this radio wasn't designed for the North American listener. Longwave is a nice extra if you travel to Europe, but is of marginal utility, so to speak, in the Americas.

### ■ Where have all the signals gone?

But shortwave performance is disappointing, even by the modest standards of this genre of receiver. Sensitivity to weak signals is about as poor as it gets, so it's hard to rack up much in the way of nifty loggings unless you connect the receiver to an outdoor wire antenna. Selectivity is only slightly less bad, but you don't notice the poor image rejection all



that much. Why? Because the radio is so incapable of receiving signals in the first place that there are relatively few images to reject!

The '718 isn't the worst radio we've ever tested, but it comes close enough to qualify as a Canine Catastrophe. Yet, keep in mind that Chinese portables are like twin sisters. They might look alike, they might sound alike, and they might even dress alike. But they tend to behave differently.

Especially where weak-signal sensitivity is concerned, it's been our experience that actual performance can vary greatly not only from sample-to-sample within a given production run, but also from one production batch to another. So when you buy a radio like this, be sure to get it on a money-back basis.

### ■ Found: an American dealer (but no cards, please)

The International MT-718 is available in North America for \$40, including shipping, from RGB Enterprises (Box 5367, Old Bridge NJ 08857; 908/679-8026). RGB is friendly enough, but they don't accept credit cards and thus the consumer protection cards offer. Presumably the '718 is found here and there from other vendors, and equally likely this same radio is available worldwide under other brand names. If you find a radio under another name that looks just like the '718 and has the exact same band coverage, then you've almost certainly uncovered the same radio *in mufti*.

The bottom line with this type of radio is that our experience over recent years indicates that the shortwave performance of Chinese analog portables has little to do with

price. We once came across a decent performer selling in Singapore for the equivalent of \$13, and we've found models selling in the United States for over \$40 that are awful.

### ■ Sony ICF-2010 soldiers on

The Sony ICF-2010 portable is the best shortwave portable on the market, especially with the Grundig Satellit 700 now out of production. But because it has been on the market for 13 years, it's a real anomaly in the here-and-gone world of consumer electronics.

Probably the longest-standing "expected to die, but hasn't" scenarios revolve around Fidel Castro and the Sony ICF-2010. First a rumor starts, then it quickly takes on the mantle of "fact." But when the coffin lid is raised, the patient turns out to be alive and kicking, after all.


While we can't predict where Fidel Castro will be in several months, I can state that Sony of America is adamant that they are keeping the '2010 in the product lineup for next year. In fact, you can see it depicted in Sony's new booklet on world band receivers, "Tune Into the World" — free from Sony of America, item C8159, 3/97. It continues to sell briskly, so this Mother of Portables isn't about to leave the scene anytime soon.

*Footnote:* There was a report on the Internet about the non-availability of parts for the '2010. It turns out that because the parts chart for the '2010 shows "1984" on the screen, some parts advisors at Sony apparently have assumed that any model that ancient must

have been discontinued a long time ago, and thus parts wouldn't be available. I talked with Sony's world band manager about this, and they're going to take steps to try to prevent this from happening again.

This equipment review is performed independently by Lawrence Magne and his colleagues in accordance with the policies and procedures of International Broadcasting Services, Ltd. It is completely independent of the policies and procedures of Grove Enterprises, Inc., its advertisers and affiliated organizations.

RADIO DATABASE INTERNATIONAL WHITE PAPER® reports contain virtually everything found during exhaustive tests of premium shortwave receivers and outdoor antennas. For a complete list, please send a self-addressed stamped envelope to RDI White Papers, Box 300M, Penn's Park PA 18943 USA.

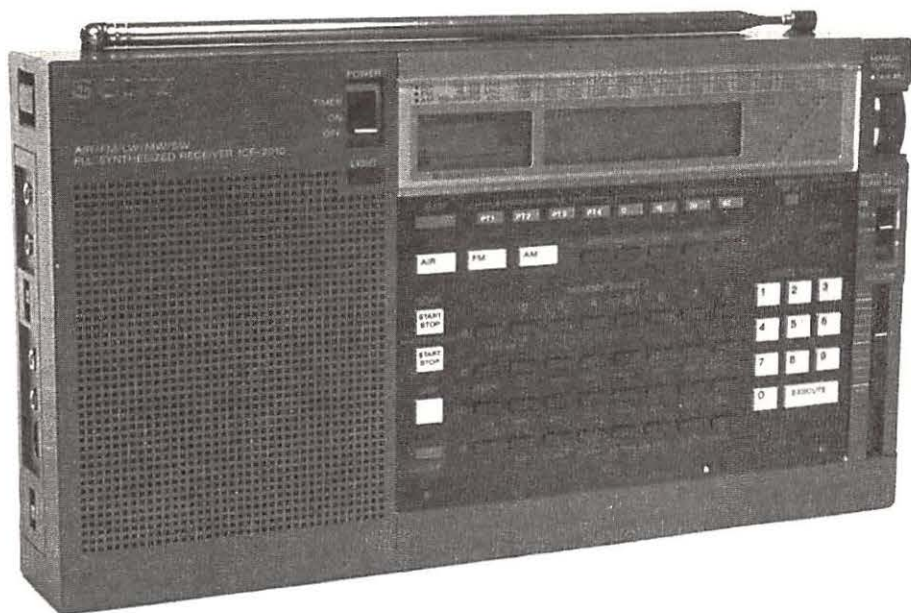

## Shortwave Receivers Past & Present

Communications Receivers 1945-1996

SHORTWAVE

**RECEIVERS**

**PAST & PRESENT**

Communications  
Receivers  
1945-1996

Second Edition By Fred Osterman

- New 2nd Ed.
- 80 Chapters
- 350 Pages
- 600 Photos
- Printed Jan. 97
- Covers 1945 to 1996
- 500 Receivers
- 400 Variants
- Includes 70 U.S. and Intl. manufacturers
- \$19.95 (+\$2 ship)

This huge 350 page Second Edition includes over 500 shortwave and amateur communications receivers made from 1945 to 1996. Here is everything you need to know as a radio collector or informed receiver buyer. Entry information includes: receiver type, date sold, photograph, size & weight, features, reviews, specifications, new & used values, variants, value rating and availability. Seventy American and worldwide manufacturers are represented. Become an instant receiver expert!

**Universal Radio**  
6830 Americana Pkwy.  
Reynoldsburg, OH 43068  
♦ Orders: 800 431-3939  
♦ Info: 614 866-4267  
♦ FAX: 614 866-2339



## ICOM R8500 Update

I reviewed the ICOM R8500 last January and have enjoyed using one ever since. In practice, the VSC voice scan detector in my R8500 is more effective in recognizing non-voice signals than the Data Skip in my Bearcat BC9000XLT and Sound Squelch in my Radio Shack PRO-2006.

The AOR AR5000 provides a way for users to readjust the response characteristics of the front end band pass filters using the front panel controls. The theory is that a user might want to make the receiver more sensitive on one portion of a band, perhaps giving up sensitivity on another. The AR5000 procedure is documented in the user manual.


The R8500 has an adjustable front end, too, but it's documented in the optional service manual instead of the user manual and is part of the bandpass alignment procedure. You can purchase an R8500 service manual directly from ICOM for \$46 plus shipping and handling charges. It contains disassembly instructions and diagrams, color illustrations of the printed circuit board layouts, parts lists, schematics, alignment procedures, and a 7 page circuit explanation.

I mistakenly wrote in the R8500 review that "the step sizes were fixed in the earlier R7100A, which would coerce the frequency to the nearest integral multiple of the step size, making it impossible to search interstitial channels in 25 kHz steps (e.g., 460.0125, 460.0375, ... MHz)..." In fact, the R7100A does not coerce the frequency, but the BC9000XLT does.

The R8500 sales literature and instruction manual mention an optional 500 Hz wide FL-52A filter can be plugged in the 455 kHz IF stage for narrow CW reception. What you won't find in print is that an auxiliary filter can be added in the 10.7 MHz IF, too. The Main circuit board has the space and holes for the undocumented filter. It must be soldered in place and a few surface mount components must be removed from the underside of the main circuit board. Perhaps the same circuit board will be used in other ICOM products.

The R8500 uses a small DPDT relay mounted on the Display printed circuit board to control a remote tape recorder or other

device. The relay, designated RL1, is visible near the back of the S-meter when the top cover is removed. RL1 is used only as an SPST and some of the contacts are not connected. You could increase the current handling ability and extend the life of the relay contacts if you wire both poles together, so the current is shared between two poles instead of just one. Alternatively, you can rewire the relay contacts to better suit your application, e.g., open contacts when a signal is received instead of closing them.

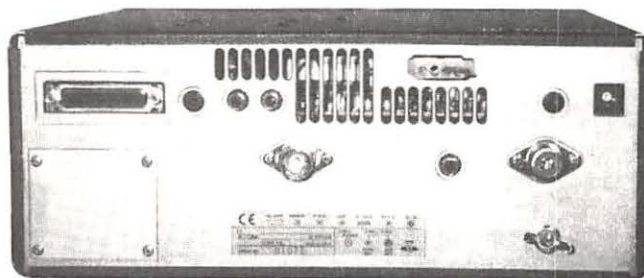

Icom 8500 receiver, rear view (Pam Parnass, N9HRZ)

The R8500 holds two additional mysteries: There's a small, removable steel panel bolted to the rear apron (see photo). Inside the R8500 is a large space and four mounting holes for an additional circuit board or module. Could these have been designed to accommodate an internal power supply instead of the external supply furnished with current production radios?

### ■ BC200XLT Broken?

If you can program frequencies into your BC200XLT, but there is no audio and the green backlight no longer functions, one or more capacitors may have failed, destroying a tiny transistor as a consequence. If you are experienced with surface mount circuitry repair and choose to troubleshoot the problem yourself, purchase a service manual from Uniden parts department, telephone (800) 297-1023. It contains schematics, circuit board layouts, and parts lists.

Then, check for a defective PNP surface mount transistor, Q201 (2SB815B6-YDY). Q201 is used as a switch to furnish 8 VDC to several stages of the BC200XLT. Its main

purpose is to switch off power-hungry stages in the BC200XLT when the CPU thinks the NiCd voltage has fallen too low. That's an attempt to limit the current drain on weak NiCds to avoid permanent damage.

Q201 is located on the foil side of the "Micom" board, adjacent to the black multi-pin connector which mates the Micom and main boards together. Q201 can be destroyed by a number of causes, but usually by something in the scanner drawing too much current through it. In one instance, capacitor C36

shorted. C36 is a 220 uF 10V electrolytic, located on the component side of the main board, connected from pin 8 of the audio IC (IC2 NJM386SL) to ground. C55, another capacitor of the same value, shorted in a different BC200XLT.

In a pinch you can remove and bypass Q201 by soldering a short piece of bare wire between the collector and emitter foil pads, but you must first replace the capacitor or other component which caused Q201 to fail.

### ■ Ask (another) Bob

Fellow scanner operators want to know:

**Q:** Can the BCT-7 Beartracker be modified for expanded 800 and 900 MHz coverage?

**A:** Yes, it *can*; whether or not it *may* remains to be settled. The FCC has determined that large-scale modifications of scanners constitutes "manufacturing" and is prohibited. However, whether an individual can modify his own scanner, whether that negates that unit's FCC type acceptance, whether the unit can be resold after modification, etc., are questions that have not yet been answered. So be forewarned.

The BCT-7 can be upgraded using the "virtual downconverter" technique, which uses a DPDT switch to swap the outputs of transistors Q14 and Q16 (figure 1), and exploits the 6th harmonic of the BCT-7's local oscillator. Alternatively, you could switch the Q14 and Q16 inputs instead of their outputs.

When the added switch is in the virtual downconverter position, the BCT-7 display




For information about virtual down-converter modifications to other scanners, see Steve Donnell's article in January 1995 *RCMA Scanner Journal* and February 1996 *Monitoring Times*.

**A:** I don't know of an electronic adjustment. The easiest remedy is to prop the rear of the scanner upwards slightly, or you could modify the LCD mounting instead. The LCD module is held at an angle to the front panel by two plastic brackets, one on each side of the module. You can reverse the angle of the display by swapping the left and right brackets with each other. This modification will reposition the display for best contrast when looking straight at the display at the same level or slightly below.

Notice that the two brackets are different colors: one black, the other white. Use a wire cutters, knife, or file to remove the tiny key from each bracket which fits into the notch on the side of the module. Swap the brackets so the left one is now holding the right side of the display module and vice-versa. Replace the two screws into the brackets and reattach the module to the front panel, taking care not to pinch the two ribbon cables nearby. Reattach the speaker and replace the metal cabinet.

**A:** The PRO-2005 and PRO-2006 are virtually identical except for scan and search speeds, determined by different CPUs and resonators. They both employ the same EL (electroluminescent) panel for backlighting. Order the \$32 replacement EL panel, part #10800050.

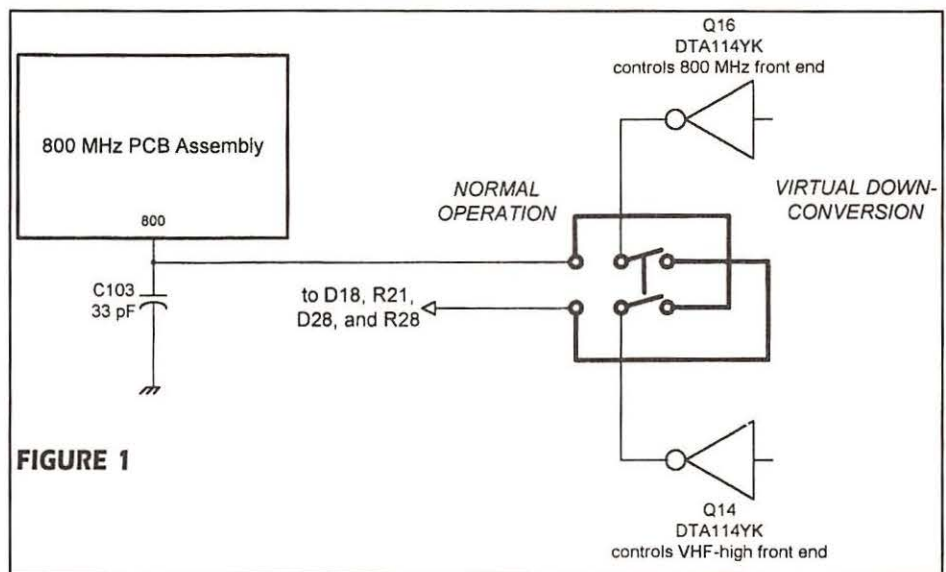

**A:** Yes. I know three other BC3000XLT owners, including me, who get about 5 hours' use. See April 1995 *MT* for a BC3000XLT product review.

**A:** Antenna catalogs are crammed full with antenna pictures and specifications and they are usually free. Contact Antenna Specialists (216-349-8400), Cushcraft (603-627-7877), Tessco (800-472-7373), Maxrad, Larsen Electronics (800-426-1656), and other companies in the land mobile equipment business.



**A:** Yes. Manufacturers often make design and production changes within the same model. Schematics show over 100 component changes in the Electra/Bearcat BC300, for example. The 1994 ECPA legislation forced manufacturers to change their designs so scanners could not tune or be "readily altered by the user" to tune the cellular phone frequencies. The rules define "readily altered by the user" as "clipping the leads of, or installing, a simple component such as a diode, resistor and/or jumper wire; replacing a plug-in semiconductor chip; or programming a semiconductor chip using special access codes or an external device, such as a personal computer."

# RadioMap™

Transmitter sites in your area are researched and marked on a beautiful 8 1/2 x 11 full color plot. See FCC licensed sites from VLF through microwave including police, fire, cellular phone sites, business, industrial, broadcasters and selected FAA transmitter sites. Call signs, frequency assignments, and names provided. Ham radio stations not included.

Your choice of map center location: your neighborhood, near your office, around sports stadiums, anywhere within the United States. We adjust map coverage for best readability, depending on transmitter site density.

Its usable to radio professionals and hobbyists for identifying towers, sources of radio interference etc. Send nearest street intersection and check for \$29.95 payable to Robert Parnass.

**Robert Parnass, M.S.,  
Radio Electronics Consulting  
2350 Douglas Road, Oswego, IL 60543**

[illegible]



## The Tao of Antennas


**A**s you probably know, in the western world (the United States, Europe, and related countries), we typically look to science to understand the physical world. Science relies heavily on the scientific approach, experimental investigation of natural phenomena, and on logical thought. The most advanced of such knowledge in physics are the ideas of quantum mechanics and relativity theory. Hopefully these areas of physics may someday help us understand our existence, reality, and the cosmos.

On the other hand, the Eastern (India, China, Asian countries) cultures often pursue knowledge about such concepts as existence, reality, and the cosmos by turning thoughts inward with various meditation techniques common within Hinduism, Buddhism, Taoism and other eastern philosophies. The most advanced knowledge in these philosophies is found in the things which their sages have to say about existence, reality, and the cosmos.

Due to the dramatic difference in the Eastern and Western ways-of-knowing, I was quite surprised when I first heard that serious scientific scholars tell us that these two paths to knowledge have arrived at virtually the same conceptualization of reality. Quantum mechanics, relativity theory, and Eastern mysticism all converge as they describe the end result of each discipline's quest to understand the basic aspect of how the physical world, the universe, and the cosmos work!

Quantum mechanics supports some very remarkable and very counter-intuitive ideas. For example, at the subatomic level, there is no causation to natural phenomena. There, particles seem to be created out of a "void" and to disappear back into that void at random. Every bit of the reality we experience as material objects is thought to be continually created and destroyed at the subatomic level in this manner! Ourselves, our antennas, and so on. These ideas are remarkably similar to those of Eastern mystics concerning the basic nature of our existence.

This startling similarity seen between Eastern and Western thought is not just the thesis of some crank. For instance, Fritjof Capra, the author of a well-known book on this subject titled *The Tao of Physics*, is a Ph.D. physicist. He has considerable experience in contemporary physics as well as wide experience and knowledge in Eastern mysticism. In addition,

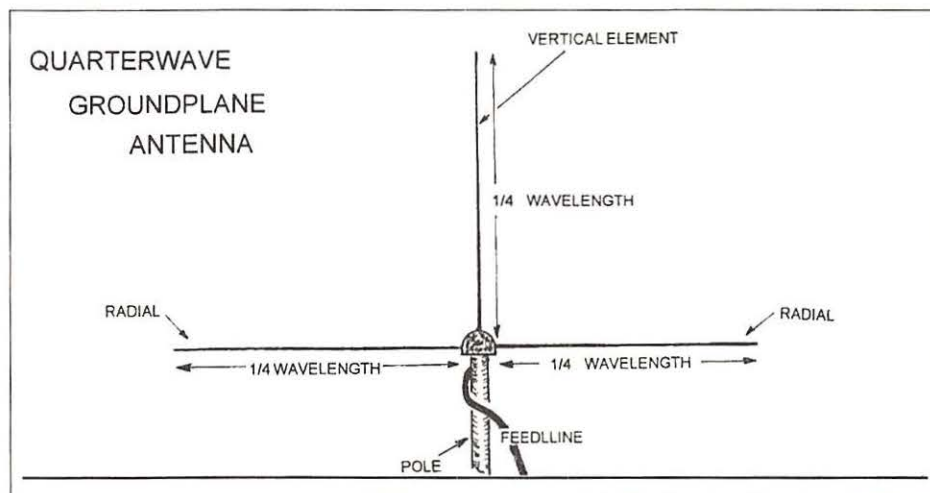

**FIGURE 1:** The halfwave elements in some resonant antennas are not obvious. For instance, in the quarterwave groundplane design the vertical quarterwave element, together with any one of its radials, comprises a halfwave resonant element. See radio riddles for details.

many other physicists, including the distinguished Neils Bohr, have been impressed by the commonality of knowledge produced by Western physics and Eastern philosophical practices.

### ■ So What?

If you're wondering why I would include the above concepts in a column on radio antennas, let me begin by saying that the most contemporary theoretical explanation of antenna function available today must include ideas from quantum mechanics and relativity theory. In the 1800s Maxwell derived his famous equations which antenna engineers still utilize in their work. But antennas deal with radio waves which travel at the speed of light, and so relativity theory is sometimes utilized in advanced antenna work. And since electromagnetic radiation—such as light and radio waves—occurs in "packets" of energy called "quanta," contemporary antenna theory must consider quantum mechanics as well.

### ■ What Antenna Professionals Say

*Radio Engineering*, an Indian text by G. K. Mithal, includes a relatively traditional explanation of radiation from a radio antenna. Following this explanation we read that, "The release of energy from an antenna can also be understood on quantum lines." Mithal then tells how planetary electrons in the atoms of

dielectric surrounding an antenna are strained such that they change orbits. This releases quanta of radio-frequency energy.

Consistent with Mithal's dual description of antenna function, physicists have long understood that electromagnetic radiation has a mysterious dual nature; one way of looking at electromagnetic radiation it appears as quanta, yet another way this radiation seems to be waves, such as light waves and radio waves. Obviously the field of physics is no stranger to strange ideas.

As a further example of the importance of contemporary physics to understanding antennas, let's note that the recent (second) edition of the classic antenna text *Electromagnetic Waves and Radiating Systems*, by Jordan and Balmain, devotes an entire chapter to "Electromagnetic Theory and Special Relativity." Additionally, the second edition of John Kraus's classic text, *Electromagnetics* (now Kraus and Carver), mentions the concept of quanta in dealing with electromagnetic radiation as well as including a chapter dealing with relativity.

### ■ And So?

What does it mean that physicists tell us that the understanding of reality obtained from relativity theory and quantum mechanics is very similar to that obtained by the Eastern path to knowledge? Does this mean that to



understand our antennas, and how they work, we could meditate instead of studying physics?

Not at the applied level, I think, but considering the commonality of ideas developed by both physics and Eastern mysticism, it is interesting to wonder where these mysteriously converging paths to knowledge may lead in the future. What new insights to the function of antennas could this produce? Maybe entirely new approaches to antenna design, such as has happened in the marriage of fractals and antenna theory. At any rate, we needn't go to sci-fi stories or Startrek® movies to trip out on such ideas as parallel universes, or matter being created from, and disappearing into the void. We have all that happening right in our own antennas (and in everything else in the cosmos), according to contemporary knowledge in physics and in Eastern philosophy.

In closing this discussion of voids, subatomic particles, antennas, and the like I'll offer the following quotation which my friend Charlie Stobaugh, WB0IK1, once read somewhere years ago, and passed on to me. "We learn more and more about less and less until we know practically everything about nothing."

"antenna tuner"—might not then be a resonant antenna. The answer is no, for when we utilize an "antenna tuner," although we can bring the entire antenna system (antenna, feedline, tuner combined) into resonance, the antenna itself is not thereby made resonant. What we call "antenna tuners" should be called "antenna system tuners."

The so-called antenna tuners which we use are connected in the feedline, not to the antenna itself. However, if appropriate tuning elements are added to the antenna element itself—as in the case of inductive loading and/or capacitive loading—then an otherwise non-resonant antenna can be made resonant. In this case, the antenna element and the loading coil and/or capacitor connect together to form the antenna. The antenna formed by these combined components then resonates at the frequency determined by the combination of element conductor-length, loading capacitance, and loading inductance.

#### ■ This Month:

The "traditional" explanation for radiation of a radio wave from an antenna was mentioned above. What is this explanation?

You'll find an answer for this month's riddle, and much more, in next month's issue of *Monitoring Times*. 'Til then Peace, DX, and 73.

**Note on advertisement below:** As of 4/26/94 it became unlawful to market cellular-capable receivers in the US. Radio Progressive assures us that it will give a full refund and hold customers harmless from shipping expenses if a purchased unit is returned to the vendor by US Customs.

## SCANNERS AND RECEIVERS

**\* Full Coverage Receivers \***

ICOM	AOR	YUPITER
ICR1 100 KHz to 1300 MHz	AR2700 500 KHz to 1300 MHz	MVT7000 8 MHz to 1300 MHz
ICR100 100 KHz to 1856 MHz	AR8000 500 KHz to 1900 MHz	MVT7100 530 KHz to 1650 MHz
ICR7100 25 MHz to 2000 MHz	AR3000A 100 KHz to 2036 MHz	MVT8000 8 MHz to 1300 MHz
ICR9000 100 KHz to 2000 MHz	AR3030 30 KHz to 30 MHz	
ICR7000 25 MHz to 1000 MHz 1025 MHz to 2000 MHz		

**Radio Progressive Ltd Inc.**  
 8104 T.C. Hwy. St-Laurent, Quebec, CAN. H4S 1M5  
**Tel.: (514) 336-2423**  
**Fax: (514) 336-5929**

## RADIO RIDDLES


#### ■ Last Month:

I said, "Speaking of resonant antennas, how many *non-resonant* antenna designs can you name? Well, let's name a few. The classics are the non-resonant rhombic, non-resonant V, and the Beverage or wave antenna. The random-length antenna is another. Two more with which everyone is familiar are the automotive AM-FM whip antenna, and the whip on most active antennas.

By the way, calling an antenna "non-resonant" usually only means that it is not resonant at the frequency of operation being considered. Any antenna is resonant at *some* frequency or frequencies. It's just when it is not resonant at the frequency we want to use it on that we call it "non-resonant." A half-wave-length long conductor resonates like a tuned circuit; in fact it *is* a tuned circuit. Therefore one clue in determining if an antenna design is resonant is whether or not its element(s) are a half wavelength in length, or some multiple thereof, at the operating frequency desired. As explained below, antennas with inductive loading or capacitive loading don't fit this rule. See fig. 1 to avoid another kind of confusion.

We might wonder whether a non-resonant antenna—after it is "tuned" with a so-called

When it comes to effective multi-band DX antennas for limited space applications, it comes to the world class **ALPHA DELTA DX-SWL** family of High Performance SLOPERS!

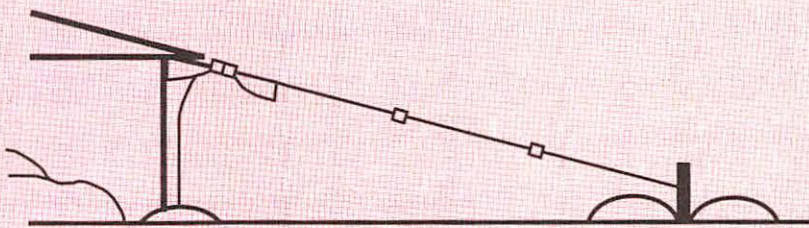

- Fully assembled, ready to use and built for long life. So strong, it can even be used to transmit—up to 2 kW!
  - Superior multi-band performance on 13, 16, 19, 21, 25, 31, 41, 49, 60, 90, 120 meters plus the AM broadcast band (.5-1.6 MHz). All in a single compact antenna. Alpha Delta first!
  - Efficient multi-band frequency selection by means of special RF choke-resonators—instead of lossy, narrow band traps.
  - Overall length just 60 feet. Requires only a single elevated support—easier to install than a dipole.
  - 50 ohm feedpoint at apex of antenna for maximum DX reception. A UHF connector is provided on the mounting bracket for easy connection to your coax.
  - A top overall rating in *Radio Database International's* hard-hitting *White Paper, "RDI Evaluates the Popular Outdoor Antennas."*
- **Model DX-SWL**, AM broadcast thru 13 mtrs, 60' long .....\$79.95  
 • **Model DX-SWL-S**, as above but 90 thru 13 mtrs, only 40' long .....\$69.95
- Both models are broadbanded and give excellent performance across the utility frequencies. Available from your local Alpha Dealer or direct. Add \$5.00 shipping and handling (U.S.A. only) Exports quoted.

## ALPHA DELTA COMMUNICATIONS, INC.

P.O. Box 620, Manchester, KY 40962  
 Phone: (606) 598-2029 • FAX: (606) 598-4413





## SPECIAL EVENT CALENDAR

May 2-3	Fresno, CA	Fresno ARC / John Pritchett, WA6JWK, 209-222-6793
May 2-3	Baton Rouge, LA	Baton Rouge ARC / Herb Ramey, KB5AQ, 504-654-6087 or 800-256-FEST
May 3	Elko, SC	Salkehatchie ARS / Inaugural Tailgate Fest / Rosewood Farm, Hwy 78 E of Hwy 37 intersection. Talk-in 147.030(+) or Ch 22. 9am-3pm. Admission free.
May 3	Cedarburg, WI	Cedarburg Swapfest / Ozaukee Radio Club, W58 N985 Essex Drive, Cedarburg, WI 53012-1439, (414) 377-2784 or 284-3271. / Location: Circle-B Recreation Center, Hwy 60 and Co I (20 mi north of Milwaukee, west of Grafton). Talk-in 146.37/97 and 146.52. 8am to 1pm, admission \$4.
May 3	Sierra Vista, AZ	Cochise ARA & SEARS / Ron Slominski, KC7QXJ, 520-378-3018
May 3	Owensboro, KY	Owensboro ARC / George Stokes, KD4CKT, 502-926-4451
May 3	Cadillac, MI	Wexauke ARC / Dan Schmidt, KE8KU, 616-775-0998
May 3	Kansas City, MO	PHD ARA / Bob Roske, WA0CLR, 816-436-0069
May 3	Owego, NY	Binghamton ARA / Dick Wilson, KB2LDY, 607-648-2748
May 3	Klamath Falls, OR	Keno ARC / Tom Hamilton, WD6EAW, 541-883-2736
May 3	Middlebourne, WV	Tyler County AR Organization / Ray Gorrell, KA8GOH, 304-758-2832
May 3	Cedarburg, WI	Ozaukee Radio Club / Gabe Chido, N9QQA, 414-377-2784
May 3-4	Abilene, TX	West Texas Section Convention / Peg Richard, KA4UPA, 915-672-8889
May 4	Livermore, CA	Livermore ARK / Noel Anklam, KC6QZK, 510-447-3857
May 4	Decatur, IL	Cenois ARC & Macon County ARC / Doug Ellison, N9ULL, 217-423-1013
May 4	Sandwich, IL	Kishwaukee ARC / Bob Yurs, N9ZNA, 815-895-3219
May 4	Hagerstown, MD	Antietam Radio Association / Matt Redding, N3XJO, 301-416-0086
May 4	Yonkers, NY	Metro 70cm Network / Otto Supliski, WB2SLQ, 914-969-1053
May 4	Wrightstown, PA	Warminster ARC / John D'Onofrio, N3RIA, 215-675-9165
May 4	Ripley, WV	Jackson County ARC / Joe Pickens, N8UXE, 304-372-5648
May 9-10	Rochester, NH	HOSSTRADERS / Joe Demaso, K1RQG, 207-469-3492
May 10	Anderson, SC	Blue Ridge ARS / BRARS, PO Box 6751, Greenville, SC 29606, 864-476-2609, E-mail: ke4qqq@innova.net, www.brars.org. / Location: Anderson Co Fairgrounds, E of Anderson on Hwy 29 Bus. Talk-in 146.01/146.61, 146.22/146.82. 8am-5pm, admission \$5
May 10	Statesboro, GA	Statesboro ARS / Ellie Waters, WB4CJB, 912-653-4939, Fax: 912-489-1243, E-mail: marshall@bulloch.com
May 10	Caldwell, ID	Snake River ARC / Dan Gardner, KB1WW, 208-893-4705
May 10	Peotone, IL	Kankakee Area Radio Society / Willis Bowser, K9IFO, 815-472-2079
May 10	Medina, OH	Medina 2 Meter Group / Clarence Miller, WA8JLA, 330-725-4492
May 10	Huron, SD	Huron ARC / Lloyd Timperley, WB0ULX, 605-352-7896
May 10	Stanwood, WA	Stanwood-Camano ARC / Vic Henry, N7KRE, 360-387-7705
May 10	Manitowoc, WI	Mancorad Radio Club / Glenn DeBaker, AA9MT, 414-684-7096
May 15-17	Bakersfield, CA	San Joaquin Valley Section Convention / Ed Harlander, KO6DY, 805-589-4163, E-mail: eharlander@aol.com
May 16-18	Dayton, OH	Dayton Hamvention / Dick Miller, N8CBU, 937-276-6930 (Box 8201), Fax: 937-274-8369, E-mail: chair@hamvention.org, http://www.hamvention.org / Look for the Grove Enterprises/Monitoring Times/Satellite Times booth #644.
May 16-18	Phoenix, AZ	Phoenix Preparedness Exposition, "Self-Reliant Living as a Way of Life." / Location: Arizona State Fairgrounds. Communications, health, food storage, camping, etc. Promotions Media Group, 233 Rogue River Hwy, Ste. 52, Grants Pass, OR 97527
May 17	Colorado Springs, CO	Pikes Peak RAA / Dennis Major, KB0SXC, 719-535-1160
May 17	Ephrata, PA	Ephrata Area Repeater Society / William Kirkner, N3PZA, 717-484-2102, E-mail: N3PZA@ptd.net
May 17	Forestdale, RI	Rhode Island Amateur FM Repeater Service / Rick Fairweather, K1KYI, 401-725-7595
May 17-18	Selah, WA	Washington State Convention / Dick Umberger, N7HHU, 509-248-3580, http://eagle.ykm.com/~w7aq/hamfest.html
May 18	Carmichael (Sacramento), CA	North Hills RC / Bob Naylor, AC6HF, 916-966-3654
May 18	Mason City, IA	North Iowa ARC / Douglas J. McMannes, KB0JBF, 515-423-5064
May 18	Cambridge, MA	MIT RS & Harvard Wireless Club / Steve Finberg, W1GSL, Nick Altemburnd, KA1MQX, 617-253-3776
May 23-24	Pascagoula, MS	Jackson County ARC / Charles F. (Kim) Kimmerly, N5XGI, 601-826-5811
May 24-25	Cody, WY	Cedar Mountain ARC / Carol Jaussaud, K7KD, 307-587-9764
May 25	Chicago, IL	Chicago ARC / George Sopocko, WA9JEZ, 773-545-3622
May 25	West Friendship, MD	Maryland F. M. Association / Craig Rokenbauch, 410-987-6042
May 25	Hilliard, OH	Franklin County Hamfest / Chris Lind, 614-267-7779, Fax: 614-263-7934
May 30-June 1	Rochester, NY	Atlantic Division Convention / Harold Smith, K2HC, 716-424-7184
May 30-June 1	Dryden, WA	Apple City ARC / Arlene Trotter, KC7EW, 509-662-2344
May 31	Loveland, CO	No CO ARC / Michael Robinson N7MR, 2236 Silver Trails Dr, Ft Collins, CO 80526, 970-282-1167. / Location: Larimer Co Fairgrounds, 700 Railroad Ave. Talk-in 145.115(-100Hz), 146.85(-) Nashville ARC / O. D. Keaton, WA4GLS, 615-758-2329
May 31	Nashville, TN	

Send announcements of events or club information to: Editor, Monitoring Times, P.O. Box 98, Brassstown, NC 28902-0098. Fax 704-837-2216; e-mail mteditor@grove.net. See MT's homepage on [www.grove.net](http://www.grove.net) for complete event and club listings.

## CLUB CIRCUIT

### North American Club Listings W - A

#### Club News:

The Association of N. American Radio Clubs named Mark Connelly as DXer of the Year for his medium wave DXing and design of listening accessories for noise canceling, etc. A Certificate of Recognition was also awarded to Kirk Baxter for a decade as system operator of the ANARC BBS and many years as president of the ACE club. MT congratulates these two very deserving recipients!

**World DX Club:** Arthur Ward, 17 Motspur Drive, Northampton, England NN2 6LY (in USA-Richard D'Angelo, 2216 Burke Drive, Wyomissing, PA 19610). Worldwide. All bands with emphasis on SW. Contact. \$22 overseas airmail. Meets every 6 weeks in Reading, UK.

**Worldwide TV/FM DXers Association (WTFDA):** P.O. Box 17333, Asheville, NC 28816, [www.users.sccoast.net/daustin/wtfda.shtml](http://www.users.sccoast.net/daustin/wtfda.shtml). Worldwide membership; TV DX, FM BC, VHF utilities. VHF-UHF Digest. Annual convention. \$24 annual in U.S. \$2 for sample.

**Worldwide Ute News:** Rick Baker, ae411@yfn.ysu.edu for info - worldwide membership; non-broadcast utility stations under 30 MHz. Free electronic newsletter WUNNEWS (may also be obtained by computer disk via PO Box 16533, Washington, D.C. 20041-6533); join by sending e-mail to majordomo@grove.net with following in e-mail message: "subscribe wun." (No club dues) Through World Wide Web: [www.leonardo.net/berri/wun](http://www.leonardo.net/berri/wun).

**All Ohio Scanner Club:** Dave Marshall, 20 Philip Drive, New Carlisle, OH 45344-9108. U.S. northeast of the Mississippi; VHF/UHF/HF utilities. Net Mon 9:30pm 146.940. American Scannergram. [www.aosc.rpmdp.com](http://www.aosc.rpmdp.com). \$18 U.S., \$21 Can/Mex, \$28 ww. \$3 sample. Annual summer meeting.

**American Eagle Sideband CB'ers Club:** Keith Herzog KC5LPQ, P.O. Box 751, Chester, MA 01011. Mainly New York/New England area. Sunday evening net/chat 37 LSB at 9:00 pm. Free sample newsletter.

**American SW Listener's Club:** Stewart MacKenzie, WDX6AA, 16182 Ballard Lane, Huntington Beach, CA 92649, (714) 846-1685; [wdx6aa@aol.com](mailto:wdx6aa@aol.com). Western US, Pacific, Asia. SWBC, utilities, longwave, clandestine. SWL. \$24 US, \$25 Can/Mex. \$2 sample (\$3 ww). Meets 1st Sats 10am address above.

**Association of Clandestine Enthusiasts (A.C.E.):** Kirk Baxter, P.O. Box 11201, Shawnee Mission, KS 66207. US, Europe and Middle East; Pirate and clandestine. A.C.E. \$20 US, US\$21 Can/Mex, US\$27 ww.

**Association of Manitoba DX'ers (AMANDX):** Shawn Axelrod, 30 Becontree Bay, Winnipeg, Manitoba, R2N 2X9 Canada, (204) 253-8644. Manitoba: LW, MW, SW, and VHF/UHF. Meets monthly. \$2.

**Association Scanner Montreal:** Nicolas Gagnon, 5083 Charleroi St. App 2, Montreal, CANADA H1G 2Z6; VHF-UHF, French language. Quebec Province area. Info: 514-955-0788.



**Introducing  
from JRC!**

Frequency Range: ..... 100 kHz-30 MHz  
Keypad Entry: ..... Yes  
Tuning Steps: ..... 5/100 Hz; 1/10 kHz  
Display: ..... Backlit LCD  
Recommended use: ..... General purpose SW  
and utilities

Known for their luxury, high-performance receivers, Japan Radio company (JRC) has just released a high quality, double conversion receiver at a low, competitive price! The new NRD-345 offers wide frequency coverage (100 kHz-30 MHz), multimode reception (AM, synch. AM, SSB), sharp selectivity (2/4 kHz), high sensitivity (0.3 microvolts), wide dynamic range (100 dB), strong audio (1 watt), dual VFOs, scannable memory (100 channels) with channel lockout, computer control (RS232C), dual clock timer (12/24 hour), precision tuning (5/100 Hz., 1/10 kHz steps), and adjustable noise blanker.

Additional features include selectable AGC timing, 20 dB attenuator, adjustable tone control, backlit S meter, large backlit LCD display, and dual-voltage (12 VDC / 120 VAC) power supply. See specifications at right.

**Only \$999<sup>95</sup>!**

And could be much less with your  
equipment trade-in (call!)

Please add \$17 2nd Day UPS; \$29 US Priority Mail;  
\$26 Canadian UPS; or \$35.50 Canadian APP shipping

Place your order now. Your credit card will not be billed until the unit is shipped. JRC expects to begin shipping these new units soon. Check the Grove website for updates on specifications, price and availability for this exciting new receiver.

GROVE

May 1997

## MONITORING TIMES



### Oops!

A sharp-eyed reader spotted a goof in last month's issue. "PL" is a registered trademark of Motorola, not GE! Thanks for the correction

### Never Again

It "never" fails. Every time I use the word "never," someone finds an exception! This month's "Let's prove Bob wrong" award goes most deservedly to long-time military contributor, Larry Fowler, whose sharp ears and eyes caught a very unusual frequency range in use.

In our March column I said that the 66-88 MHz range is "never" used for air-to-ground communications in the United States. But Larry has actually heard New York Army National Guard aircraft using medium FM transmissions on 69.65, 72.0, 72.65, 73.05, and 81.05 MHz; he even heard two A-10 Warthogs communicating on 75.10 MHz!

Larry went on to list several additional frequencies which proved me wrong; his contributions will appear in the Utility World loggings shortly. It really galls me to have to say this, but thanks for proving me wrong, Larry!

**Q. Can I increase the range of my remote control garage door opener? (M. Engel)**

**A.** License-free transmitting devices are regulated by the FCC to be low power, and usually the antenna is part of the package. Garage door openers typically operate in the 200-400 MHz range. You could extend the control radius by adding an external antenna, attached to a high elevation on the house, and connected by coax cable to the motor/receiver unit.

It would be best to mount an antenna connector on the circuit board where the present wire antenna extends; the center of the connector would go to the solder point presently attached to the wire, and the frame of the connector would go to the common frame of the circuit board.

The antenna could be home made; it would be a simple, cut-to-frequency dipole, made of stiff wire soldered to a connector. The total dipole length in inches would be found by dividing 5616 by the frequency in megahertz.

Not much you can do with the remote control; the antenna is usually part of the circuit board. Relocating the remote close to

the windshield is about all the improvement you can make.

**Q. How can I tell whether my scanner preamplifier is working properly? It has a gain control, but that doesn't seem to have much effect as I rotate it. (Mark Keefe)**

**A.** At frequencies below approximately 150-200 MHz, typical commercial preamps really don't help much. The purpose of a preamp is to build up a weak signal so that it is stronger than the noise generated by the radio's own circuitry. Most scanners have very effective, low-noise, built-in amplifiers of their own at the lower frequencies. It's at higher frequencies (above 200 MHz) that a good preamp can really shine.

Once a signal is strong enough to overcome the background "hiss" normally associated with a weak signal, no amount of increase will be audible. Choose a very weak signal, preferably in the 450 or 800 MHz range, and try turning the control. That should prove the preamp's operational status. If the background noise ("hiss") doesn't reduce audibly as the

## Bob's Tip of the Month

Prospective buyers of the new AOR and Icom receivers often ask how they compare with each other and with the long-standing R7100. Recently we performed several lab tests at Grove Enterprises using off-the-air signals and a Hewlett-packard 8640B signal generator. Results among different samples of the same models will probably vary slightly.

All three receivers exhibited approximately equal sensitivity below 1000 MHz, but at a nominal 1090 MHz test frequency, the AR5000 exhibited profoundly better sensitivity than either Icom.

S meter accuracy (S9 = 50 uV) at different frequency ranges and signal amplitudes is excellent on the R8500, while the R7100 errs as much as 12 dB (2 S units). S meter measurements were not performed on the AR5000.

## Comparing the ICOM R8500, R7100, and AOR AR5000 Receivers

### TEST RESULTS

Minimum detectable signal (MDS) in dBm (and dynamic range in dB); narrow FM mode, 6 kHz bandwidth, 4 kHz deviation.

Frq. MHz	R8500	R7100	AR5000
30	-114(90)	-114	-118(100)
52	-110	-110	-110
74	-110	-117	-110
128	-114	-114	-115
155	-115(90)	-115	-115(110)
172	-115	-115	-116
222	-116	-116	-116
455	-116(120)	-116	-116(120)
852	-119(110)	-121	-121(100)
1090	-112	-105	-128

NOTE: The larger the number, the better; for example, -118 dBm is better sensitivity than -114 dBm, and 110 dB dynamic range is better than 90 dB. For all practical purposes, specifications within 1-2 dB will result in virtually identical performance.



signal comes up, either the preamp isn't working, or strong, nearby signals are overloading the system.

If overload interference is the problem, filters probably need to be added between the preamp and the antenna.

**Q. Will Monitoring Times ever be offered on CD-ROM? (Rob Sabato, Bloomfield, NJ)**

**A.** Probably not, at least in the foreseeable future. *MT* is printed and distributed very quickly, and less expensively than CDs. We have had no other requests that I know of, so quantity pressing is not justified.

We have had requests for past issues on CD-ROM, and we are still discussing that. Nearly all of our writers are agreeable to having their works republished on CD, so that

is no problem. Some of the tricky questions are: What about ads? What about timely frequency schedules and lists which become quickly outdated? How about illustrations which require more RAM processing and color monitors? And who will make the decisions as to which articles we use and which we don't? Should the CD reissues be assembled by topic rather than cover date? There are many other tactical problems as well. Let us know what you would like.

**Q. I live on the 40th floor of a high rise. I have no balcony, and the windows rise only about two inches. What can I use for shortwave and scanner antennas? ("Oppressed in the City")**

**A.** For shortwave, try to find a sympathetic neighbor whose window is at least 20-30 feet from yours. Select a thin wire with insulation approximately the same color as the building and string it from your window to a convenient tie point at the neighbor's window. No one is likely to notice the wire, and reception will be better than with an indoor antenna.

For scanning, since you can open the window a couple of inches, contrive a bracket that will allow you to stick a good, mobile scanner antenna out the window. Don't worry about vertical or horizontal polarization since, at your location, signals are getting bounced in every direction anyway.

But with the whip stuck out the window, you have only half an antenna; at the base, where the coax shield is connected, run a couple of 18" wires out from either side to make a ground plane. And if you do much low band (30-50 MHz) listening, you also should run a five-foot wire down toward the floor.

**Q. Some friends of mine, in law enforcement, are interested in getting their amateur radio licenses, but, because of the nature of their work, they don't want their call signs, names, and addresses published in directories. Is there any way this can be done? (Mike Elcsisin, Lake Berryessa, CA)**

**A.** None of which I am aware. The ham call books and CD-ROMs come from official FCC records, and unless the FCC has a provision to exempt certain licenses from the records, the information will all be there.

Questions or tips sent to "Ask Bob," c/o *MT* are printed in this column as space permits. If you desire a prompt, personal reply, mail your questions along with a self-addressed stamped envelope (no telephone calls, please) in care of *MT*, or e-mail to [bob@grove.net](mailto:bob@grove.net).

(Please include your name and address.) The current "Ask Bob" is now online at our WWW site:

[www.grove.net](http://www.grove.net)

## Do You Have Questions? Bob Has Answers!



Get the answers from the expert on scanner and shortwave monitoring. Bob Grove's *Scanner and Shortwave Answer Book* is a great addition to your reference library.

Order BOK5  
**\$12.95**

Plus \$2 Bookrate or  
\$4.50 UPS

Grove Enterprises  
7540 Hwy. 64 W.  
Brasstown, N.C. 28902  
1-800-438-8155

## INDEX OF ADVERTISERS

Alpha Delta .....	97
Antique Radio Classified .....	75
Arcron Zeit .....	25
Atlantic Ham Radio .....	73
Austin Antenna .....	77
Communications Electronics .....	33
Computer Aided Technologies ...	90, 91
Delta Research .....	67
DX Computing .....	49
Electronics Book Club .....	3
Electronic Distributors .....	21
Erie Aviation .....	87
Future Scanning Systems .....	95
Glenn Hauser .....	39
Grove Enterprises .....	44, 69, 99, 101
<b>plus special 16-page Buyer's Guide</b>	
ICOM .....	Cover III
Index Publishing .....	77
Jacques d'Avignon .....	61
KIWA Electronics .....	81, 83
Klingenfuss .....	67
Lentini Communications .....	67
Monitoring Times .....	103
Motron Electronics .....	79
National Scanning Report .....	32
Naval Electronics .....	77
OptoElectronics .....	Cover II, IV
Palomar Engineering .....	65
PW Publishing .....	73
Radiomap .....	95
Radio Progressive .....	97
Ramsey Electronics .....	59
R.D.I. White Papers .....	93
Relm Communications .....	5
Satellite Times .....	103
Scanner Master .....	23
SGC Inc. ....	17
Signal Intelligence .....	73
Skyvision .....	81
S.R.P. Trading .....	25
Universal Radio .....	93
Viking International .....	7
WiNRADIO .....	13
Worldcom Technology .....	85



# STOCK EXCHANGE

*Monitoring Times assumes no responsibility for misrepresented merchandise.*

Ads for **Stock Exchange** must be received 45 days prior to publication date. All ads must be paid in advance to *Monitoring Times*.  
Ad copy must be typed for legibility.

**NON-COMMERCIAL SUBSCRIBER RATES:**  
\$.25 per word — *Subscribers only!*  
All merchandise must be personal and radio-related.

**COMMERCIAL RATES:** \$1.00 per word.  
Commercial line ads printed in bold type.

**1-3/4" SQUARE DISPLAY AD:** \$50 per issue if camera-ready copy or, \$85 if copy to be typeset. Photo-reduction \$5 additional charge. For more information on commercial ads, contact Beth Leinbach, 704-389-4007.

**GESUPERADIO III**, custom designed with up to four noise-free SCA channels. Performance guaranteed. Credit Card orders accepted. (800) 944-0630.

**FM MICRO BROADCASTING:** Transmit many miles. 88-108 MHz. PLL. Kit or assembled. Mono/stereo, 1-100 watts. Call (250) 642-2859. R. Scott Communications.

**SPORADIC WAVES!** A newsletter that will surprise you ... **FREE SAMPLE!** All you need to do is ask; Pineapple Paradise Radio Company, P.O. Box 751, Chester, MA 01011.

**RC-740X**, band expansion for **KENWOOD 741/742** series, Scanner **WEAR WINDOWS** software for **ICOM, AOR, Opto** receivers. See all at <http://www.radioscan.com>. Radio Control Systems Inc. (800) 560-7234.

**POOR RECEPTION** on your **A.M. Radio**? Our signal booster will help. Guaranteed! Version 1601 tunes 530-1600 KHz. \$39 + \$5.50 S&H. If not satisfied within 30 days, we'll refund your money, less S&H charge. Fala Electronics-6, P.O. Box 1376, Milwaukee, WI 53201-1376. (414) 671-5203.

**DEPOT SERVICE CENTER** — All prices flat rate labor + parts (includes UPS return). Uniden/Bearcat scanner repair \$39.00, Motorola Minitor pagers \$19.95,

**2-way radio repair** - GE, Motorola, Regency, most major brands \$55.00. **Radio programming** \$14.95 ea. TSC, 12C West Avenue, Atlantic Highlands, NJ 07716. (908) 872-2926.

**TEST EQUIPMENT BONANZA!** Free shipping! Bird 4411W wattmeter, like new; elements for 2-30, 144-520, 400-1000 MHz, leather case. Orig. cost \$1383 (order TIN75 \$569.95). Grove Enterprises, P.O. Box 98, Brassstown, NC 28902. 1-800-438-8155.

**PRO-46 HANDHELD** scanner, 100 channel, 29-956 MHz, cellular restored. New in the box. \$325.00. Call or fax Thomas at (513) 661-1234.

**"RADIO STUFF SALE!"** Magazines, bulletins, books, radio station items, some equipment. Send 2-stamp business size SASE or \$1 for list: G. Dexter, 213 Forest St., Lake Geneva, WI 53147.

**DX-392** (Sangean ATS-818CS) Shortwave Receiver, built-in cassette recorder. Like new in box. \$175.00. Howard (716) 838-2406.

**FOR SALE:** AOR AR1500 scanner 500 kHz-1300 MHz continuous (no gaps), all accessories, excellent condition. \$350.00 will ship. Call Rudy (847) 358-1150.

**FOR SALE:** Sony ICF-SW100S used twice, works great, must sell \$275. I ship. **WANTED:** Sony TR-714 transistor radio, AM/SW shirt

pocket from late 1950s, Zenith Leather Transoceanics. Jeff Wayne, 61 Allendale Drive, North Haven, CT 06473. (203) 281-6038, wayne4@snet.net.

**SONY ICF-6800W** with orange lettering. Excellent working condition, good cosmetics. No box or manual. \$260 shipping included or trade for Grundig Satellit 700. (319) 393-4303.

**RITTY PACKAGE**, Universal M900 version 2, decoder. AMTOR, SITOP, FAX, CW. With Sanyo 9" green monitor. \$350 I ship. John (907) 337-9168.

**ICOMR-7100A**, full coverage, excellent condition. \$975, Bob (203) 630-3552.

**FOR SALE:** NRD-535D, \$1,600; HF-150, \$400; ICF-SW 1, \$250; NIR-12, \$300; Uniden MR 8100, \$300. Call Sandra (606) 623-0092 weekdays 8-5.

**BACK ISSUES** *Monitoring Times* and *Popular Communications*, 1990 to 1996. Mostly complete. List on request. Best offer. Herb (214) 363-4865.

**NRD-515 RECEIVER** with speaker. Collins filter, Sherwood calibrated and aligned. Absolutely mint. \$750.00 firm. James B. Geer, 1013 Overhill, Bedford, TX 76022-7206. (817) 540-4331.

## (RADIO PROGRAMS ... Continued from page 43)

2230 WHRI (Angel 2): "DXing with Cumbre"  
2345 Radio Bulgaria: "Radio Bulgaria Calling"

### Saturdays

0010 Australia, Radio: "Feedback"  
0200 KWHR (Hawaii): "DXing with Cumbre"  
0400 Radio For Peace Intl: "World of Radio"  
0500 KWHR (Hawaii): "DXing with Cumbre"  
0500 WHRI (Angel 1&2): "DXing with Cumbre"  
0530 WWCR #3 (Tennessee): "World of Radio"  
0810 HCJB (eu): "DX Partyline"  
0910 HCJB (pac): "DX Partyline"  
0915 WWCR #3 (Tennessee): "Ask WWCR"  
0940 FEBC (Philippines): "DX Dial"  
0940 KTRW (Guam): "Pacific DX Report"  
1030 Voice of America (as pac): "Communications World"  
1100 Radio For Peace Intl: "World of Radio"  
1115 Radio Bulgaria: "Radio Bulgaria Calling"  
1130 WWCR #3 (Tennessee): "World of Radio"

1230 Voice of America (as pac): "Communications World"  
1245 Voice of Turkey: "DX Corner" (biweekly)  
1300 WHRI (Angel 2): "DXing with Cumbre"  
1300 WWCR #1 (Tennessee): "World of Radio"  
1342 Radio Tashkent: "Radio Tashkent DX Program"  
1349 Radio Romania Intl: "DX Mailbag"  
1455 FEBC (Philippines): "DX Dial"  
1519 Radio Romania Intl: "DX Mailbag"  
1730 Voice of America (af/me/south as): "Communications World"  
1730 WHRI (Angel 1): "DXing with Cumbre"  
1800 Radio For Peace Intl: "World of Radio"  
1910 HCJB (eu): "DX Partyline"  
1915 Voice of Turkey: "DX Corner" (biweekly)  
1949 Radio Romania Intl: "DX Mailbag"  
1958 Vatican Radio: "On-the-Air"  
2000 WWCR #3 (Tennessee): "Ask WWCR"  
2015 WRM (Florida): "Wavescan"  
2130 Voice of America (me): "Communications World"  
2134 Radio Havana Cuba: "DXers Unlimited"  
2149 Radio Romania Intl: "DX Mailbag"  
2215 Voice of Turkey: "DX Corner" (biweekly)  
2230 WRM (Florida): "Wavescan"

2231 Radio Exterior de Espana: "Distance Unknown"  
2234 Radio Havana Cuba: "DXers Unlimited"  
2330 Vatican Radio: "On-the-Air"

**Visit the Grove  
booth #644 at the  
Dayton Hamvention,  
May 16-18!**



**Think of what  
you could do  
with this space...**

**It's painless, we promise.  
Contact our advertising  
manager, Beth Leinbach,  
at 704-389-4007**

## PC RAM CHIP UPGRADES

*New Even Lower Prices!*

Through a special distributor-direct arrangement, Grove can offer you high quality RAM expansion at **incredible savings!** These are the same PC RAM upgrade SIMMS (72-pin, double-sided, non-parity, gold contacts) which you might buy from the big mail order houses—but you save \$\$\$ when you purchase from us!



8MB .....\$54.95 (Order RAM08)  
16MB .....\$141.95 (Order RAM16)  
16 MB (EDO 60) ..\$141.95 (Order RAM 16E)

**GROVE ENTERPRISES, INC.**  
**1-800-438-8155; 704-837-9200**

FAX 704 837-2216; 7540 Highway 64 West, Brasstown, NC 28902

### Join The Club!

Open to hobbyists worldwide, the **CANADIAN INTERNATIONAL DX CLUB** is an active promoter of the radio hobby through its monthly newsletter and local chapters.

The *Messenger* is packed with general coverage information including the broadcast band, shortwave, utilities, scanning, amateur radio and more. Send \$2 for a sample bulletin and membership information to:

**CIDX**

79 Kipps St., Greenfield Park,  
Quebec, CANADA J4V 3B1

### World Scanner Report

10 issues per year for casual & expert radioists who are committed to rare achievement and excellence in the pursuit of VHF-UHF scanning.



E-Mail: bcheek@cta.com

CFR 74107.1126

Edited and published by Bill Cheek, author of *The Ultimate Scanner* and the *Scanner Modification Handbooks, Vols 1 & 2*. SASE for info or \$5.00 for sample issue.

\$20/12-yr; \$65/two-yr; Canada & other foreign +25% surface or +50% air. US Funds Only. MC/VISA ok. FAX: (619) 578-9247 6pm-1pm - Voice Only 1:30-5:30pm PST

**COMMtronics Engineering**  
Box 262478 ~ San Diego, CA 92196

### Ontario DX Association

We publish  
*DX Ontario* magazine,  
40 pages every month!  
\$3.50 for sample

Ontario DX Association  
Box 161, Station A  
Willowdale, Ontario M2N 5S8  
Phone/Fax (416) 293-8919  
CompuServe 70400.2660

The DX-Change news service  
(416) 444-3526  
The Listening Post BBS  
(905) 841-6490

**R F P I THERMO MUGS**  
**16-oz \$10 each, ppd**



**P.O. Box 20728 - M  
PORTLAND, OR 97220**

### SATELLITE RADIO BOOK & GUIDE

**NEW BOOK** covers all Audio Services, SCPC, Subcarriers, FM<sup>2</sup>, Facsimile, Press Services, Weather Services. Simple how-to-receive instructions. **Satellite Radio Guide Included.** \$16.95 plus \$3 Priority Mail (\$19.95 total).

**UNIVERSAL ELECTRONICS, INC.**  
4555 Groves Road, Suite 12  
Columbus, OH 43232 (614) 866-4605

### THE COMPLETE GUIDE TO MILITARY MONITORING

**NEW BOOK** covers all phases of Military Monitoring. Military Frequencies All Services, U.S. Military Bases, Military Black Projects. Major Air Force Installations, Monitoring Equipment and Systems, Navy/Coast Guard and more.

\$19.95 plus \$4 Priority Mail (\$23.95 total).

**UNIVERSAL ELECTRONICS, INC.**  
4555 Groves Road, Suite 12  
Columbus, OH 43232 (614) 866-4605

### HUGE 100 PAGE CATALOG

- Shortwave Receivers
- Amateur Radio Gear
- Scanners
- RTTY & Fax Equipment
- Books & Accessories

Send \$1 to  
**Universal Radio**  
6830 Americana Pkwy. MT  
Reynoldsburg, OH 43068  
Tel. 800 431-3939

**Find All of Your  
Scanner and  
Shortwave Needs  
On-Line!**

**See Grove's On-Line  
Catalog at**  
<http://www.grove.net/hmpgcat.html>

**NEW! Subscribe to MT for Six Months for  
only \$12.95 (U.S. Second Class Mail)**



Clip and mail this ad along with your  
payment or call us to subscribe or renew to  
*Monitoring Times* or *Satellite Times*!



If you are currently a subscriber to *Monitoring Times* or *Satellite Times*, please check your label to determine the expiration date of your subscription.

	MT-6 months	MT-One Year	MT-Two Years	MT-Three Years	ST-One Year
US Rates	<input type="checkbox"/> \$12.95	<input type="checkbox"/> \$23.95	<input type="checkbox"/> \$45.95	<input type="checkbox"/> \$67.95	<input type="checkbox"/> \$19.95
US 1st Class	<input type="checkbox"/> \$25.95	<input type="checkbox"/> \$49.95	<input type="checkbox"/> \$97.95	<input type="checkbox"/> \$145.95	<input type="checkbox"/> \$32.95
Canada Surface*	<input type="checkbox"/> \$19.95*	<input type="checkbox"/> \$36.50*	<input type="checkbox"/> \$69.95*	<input type="checkbox"/> \$103.95*	<input type="checkbox"/> \$28.50*
Foreign International*	<input type="checkbox"/> \$28.95*	<input type="checkbox"/> \$55.45*	<input type="checkbox"/> \$108.95*	<input type="checkbox"/> \$162.45*	<input type="checkbox"/> \$46.50*

\*All payments must be in U.S. Funds  
drawn on a U.S. Bank!

**P.O. Box 98, Brasstown, NC 28902**  
**1-800-438-8155**

Name \_\_\_\_\_ Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_ Country \_\_\_\_\_  
CC# \_\_\_\_\_ Exp. Date \_\_\_\_\_  
Signature \_\_\_\_\_

## Give Us Four !

Do you know your four-digit postal zip code extension? If your mailing address uses a route number, have you been assigned a 911 street address, instead? The P.O. has informed us they will begin delaying delivery of mail that does not contain these correct elements. We will not be able to honor replacement requests for a month after non-delivery if your address does not comply.

**28902-0098**

Look at your label to see if it lacks the required information. If so, please send your updated mailing address to us at P.O. Box 98, Brasstown, NC 28902-0098, or e-mail to [order@grove.net](mailto:order@grove.net). Thanks for helping us get *Monitoring Times* to your doorstep in the most speedy and economical way possible.





By Bob Grove,  
Publisher

## Techno-Terms for the Times

With the fast pace of emerging technologies, technospeak has grown increasingly unintelligible. It is hard to open the newspaper, a magazine, or even watch TV without hearing about web sites, PCS, digital telecommunications, and other buzz words of the information age. For the perplexed, and even for those of us who *should* know these terms, but don't, let's take a tutorial cram course in current technical dialogue in simple terms:

**Analog:** An electrical signal which represents frequency and amplitude of another signal source. For example, a loud voice spoken into a microphone produces a strong electrical signal, and a high pitched sound produces a high frequency electrical signal. The new electrical signal is the *analog* of the original sound.

Similarly, a loudspeaker or earphone converts the electrical signal into an analogous sound, tracking faithfully the loudness and pitch of the electrical signal which, in turn, was produced by the microphone.

**Baud:** Simply stated, the number of symbols per second in a train of digital data; it is not the same as "bits per second" (bps) unless the code is binary. The baud rate is roughly equivalent to the analog term, frequency. Named for the French engineer, J.M.E. Baudot, who constructed the first successful teleprinter.

**Binary:** A two-level data code, often represented as on or off, 1 or 0, or (+) or (-).

**Bit:** (BInary digiT) A data pulse, or absence of a data pulse, in a train of data.

**Byte:** A digital train of eight bits, representing a letter, numeral, or other character.

**Digital:** The use of spaced pulses, rather than amplitude or frequency, to represent information. For example, a tone could be represented by a series of numeric "bits" of information, each calculated to represent a point of amplitude or frequency as a place in time.

Since our human senses respond to an analog environment (e.g., frequency and intensity of light, pressure of touch, loudness and pitch of sound, intensity of taste and smell, etc.), we use A/D (analog to digital) and D/A (digital to analog) converters to interface between us and digital processing equipment.

**Interface:** A circuit intended to provide compatibility between two otherwise-incompatible devices.

**Internet:** Originating in the 1970s to interconnect governmental and educational institutions, the Internet has expanded to include tens of millions of individuals worldwide with no common thread except the desire to acquire and

exchange information. Unlike commercially-controlled services like America Online (AOL) and Compuserve, the Internet is the world's largest public system of intercommunication, in effect a giant network interlinking smaller networks.

**ISO:** The International Organization for Standardization comprises 89 countries' standards organizations, including the American National Standards Institute (ANSI), to adopt computer standards. "ISO" is from the Greek, meaning "same;" it is not an acronym or abbreviation.

**Parallel:** The transmission of several data streams simultaneously over multiple lines.

**PCS:** The Personal Communications Services (PCS) were established by the Federal Communications Commission (FCC) to accommodate the growing need for radio frequencies in telecommunications. Uses include wireless computer networks, fleet tracking, paging and radiotelephone, information access, inventory control, security, and environmental comfort control.

Most of these services utilize satellites which operate in the VHF, UHF, and microwave frequency ranges and utilize digital transmission modes. PCS is expected to dwarf the conventional cellular telephone industry within a few years, and many "dual mode" cellphones are now being made to accommodate both services.

**RJ11:** Modular telephone/computer jack conventionally used in the U.S.

**RS232C:** The "Recommended Standard" originally published by the Electronics Industry Association (EIA) for a computer's serial port, for electrical signal levels. DB9 and DB25 connectors, named because of their D shape and having 9 or 25 pins, are commonly used.

**Serial:** The transmission of data one bit at a time as a long string.

**Telecommunications:** A broad reference to the transmission of any information by wire or radio. Computer exchanges, telephone conversations, satellite TV, ham and CB radio, shortwave broadcasting, police dispatching, PCS, and cellular telephones are all forms of telecommunications.

**Web:** The World Wide Web is an enormous collection of documents—"pages" of text—as well as graphics, sound, and video used to facilitate and enhance communications.

These are just a few of the terms that jargonists throw around in the computer world. And it's not going to get any better. If you have difficulties traveling through this new time warp, let us know what confuses you, and we will do what we can to make the trip easier!



## WHAT THE EXPERTS SAY:

### "BOTTOM LINE:

A top notch receiver/scanner with quality and features to please the discriminating and serious SWL or monitoring buff.

This handsome receiver is a terrific centerpiece or complement to any listening shack."

— QST, April 1997.

"R8500 construction is impressive.

A rugged, die-cast aluminum chassis is used to hold and shield the various circuit boards. Good grounding and shielding are required to prevent a receiver from 'hearing' its own circuitry, resulting in birdies.

The large padded tuning knob and rubber keys exude quality and are easy to operate....

The yellow backlit LCD display has excellent contrast, making it much easier to read...."

— Monitoring Times, January 1997.

"...it's on HF where the ICOM really shines.

The R8500 has both a Noise Blanker circuit and Intermediate Frequency Shift that really help reduce or eliminate interference on short-wave frequencies.

The ICOM's Audio Peak Filter is also very effective at helping voices to 'pop out' of the HF background noise."

— Popular Communications, February 1997.



## Extra Wide Coverage, All Mode

Cover frequencies from 100 kHz to 1,999.99 MHz\* using 10 Hz tuning steps. Receive SSB (USB, LSB), AM (normal/narrow/wide), FM, WFM, & CW!

## Built-In ICOM Hardware for Easy, Powerful Computer Control

The IC-R8500 is designed to grow along with your communication needs. A CI-V serial communications port (no additional level converter required) and a RS-232C PC connection port are built-in. Use third party software to enhance the IC-R8500's already impressive basic controls:\*\*

- Boost memory channel capacity up into the thousands
- Increase scanning speeds and further customize scanning preferences
- Create expanded alpha tags for each programmed frequency
- Use computer keyboard shortcuts to instantly change receiver settings
- Define search ranges by frequency, step, mode, database service code or other category
- Log & edit receiver data with date,

time, signal strength, etc.

- Convert data into expanded memory banks
- Set the volume control by channel
- And much more!

## IF-Shift and Audio Peak Filter

Signals come in loud and clear! In SSB mode, an IF-Shift function rejects nearby interfering signals. In FM mode, an Audio Peak Filter provides tone control. And to compensate for FM, FM-N or WFM station frequency drift, an Auto Frequency Control helps keep the IC-R8500 right on frequency!



# IC-R8500

## Advanced Worldwide Base Station Receiver



- High Stability (<30 MHz:  $\pm 100$  Hz, VHF/UHF:  $\pm 3$  ppm)
- New DDS (Digital Direct Synthesis)
- New PLL (Phase-Locked Loop)
- Selectable AGC Time Constant
- 1000 Memory Channels: 20 Banks of 40 (total of 800 "normal"), 100 Skip Scan, and 100 Auto Write Memory Scan
- S-Meter Squelch
- Noise Blanker (SSB/AM)
- 3 Antenna Connectors
- Operates on AC or DC power

Call 425-450-6088 for a free brochure!

Questions? Contact ICOM Technical Support in the HamNet forum on CompuServe® @75540.525 (Internet: 75540.525@compuserve.com). © 1997 ICOM America, Inc., 2380-116th Ave., N.E., Bellevue, WA 98004. \*425-454-8155. The ICOM logo is a registered trademark of ICOM, Inc. \*\*Specifications are guaranteed 0.1 to 1000 MHz and 1240 to 1300 MHz. Cellular blocked: unblocked versions available only to FCC approved users. \*\*Not all software manufactured for the IC-R8500 may offer each listed capability. Please check with your authorized ICOM dealer or the individual software manufacturer for complete details regarding a particular software's capabilities. All ICOM radios significantly exceed FCC regulations limiting spurious emissions. CompuServe is a registered trademark of CompuServe, Incorporated, an H&R Block Company. R8500397Y

# ICOM®

## RECEIVERS

<http://www.icomamerica.com>



# iCan Reaction Tune Another Receiver!

Reaction Tune the  
**NEW**  
ICOM IC-R10

See you at Dayton!  
Booth # 70, 76, 77

Use the OptoLinX  
for computer controlling  
the ICOM IC-R10  
\$129.00



Computer Not Included

**Scout's** unique functions. Whether you're searching for new frequencies in your neighborhood, or testing for interference, the **Scout** is the ultimate communications tool.

Armed with a 400 frequency memory register, the **Scout** does not record duplicate frequencies, instead it coordinates repeated frequencies into a hit register storing up to 255 hits per frequency. Attach it to your belt and begin your day, the **Scout** will alert you when a signal is received by its beeper or vibrator function.

You won't miss a thing with Reaction Tune. The **Scout's** CI-V compatible output allows it to interface to the AOR AR2700/AR8000, ICOM R7000, R7100, R8500, R9000 and now the new IC-R10 (shown opposite). The **Scout** captures the frequency, then sends the serial data to the receiver and tunes the scanner to the frequency for instant monitoring in less than one second. Recorded frequencies can be downloaded to a PC using the optional OptoLinX universal interface •

## SPECIFICATIONS

- ▶ 10MHz - 1.4GHz frequency coverage
- ▶ Stores and records 400 frequencies in memory with 255 hits for each
- ▶ Interface to a PC for frequency download using optional OptoLinX PC interface
- ▶ Distinctive beeps indicate frequency hits, pager style vibrator for discreet recording
- ▶ Automatic EL backlight for night operation
- ▶ 16 segment RF signal strength bargraph
- ▶ Frequencies are automatically saved when unit is turned off
- ▶ Reaction Tune the ICOM R7000, R7100, R8500, R9000, IC-R10, and AOR AR2700, AR8000, and the Radio Shack Pro 2005/6 using the Optoelectronics OS456, Radio Shack Pro 2035/42 using the Optoelectronics OS535



Scout with ICOM IC-R10  
Mono Cable required (shown)

Radio Not Included

U.S. Patent No. 5,471,408

**FACTORY DIRECT ORDER LINE 800-327-5912**



**OPTOELECTRONICS®**

INNOVATIVE PRODUCTS FOR A MODERN PLANET

5821 NE 14th Avenue • Ft. Lauderdale, FL • 33334

Telephone • (954) 771-2050 Fax • (954) 771-2052

Visa, Mastercard, C.O.D. Prices and specifications are subject to change without notice or obligation

The ICOM logo is a registered trademark of ICOM Inc. ICOM IC-R10 not distributed by OPTOELECTRONICS, contact ICOM for information and availability.